


## ***Localisation précise par moyens spatiaux***

### **LEO POD using GPS**

*Adrian Jäggi  
Astronomical Institute  
University of Bern*

# Low Earth Orbiters (LEOs)

**GRACE**

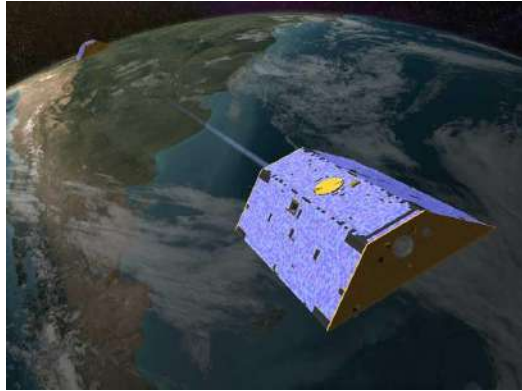

**Gravity Recovery And  
Climate Experiment**

**GOCE**



**Gravity and  
steady-state Ocean  
Circulation Explorer**

**TanDEM-X**



**TerraSAR-X add-on for  
Digital Elevation  
Measurement**

Of course, there are many more missions equipped with GPS receivers

**Jason**



**Jason-2**




**MetOp-A**




**Icesat**



**COSMIC**



# LEO positioning

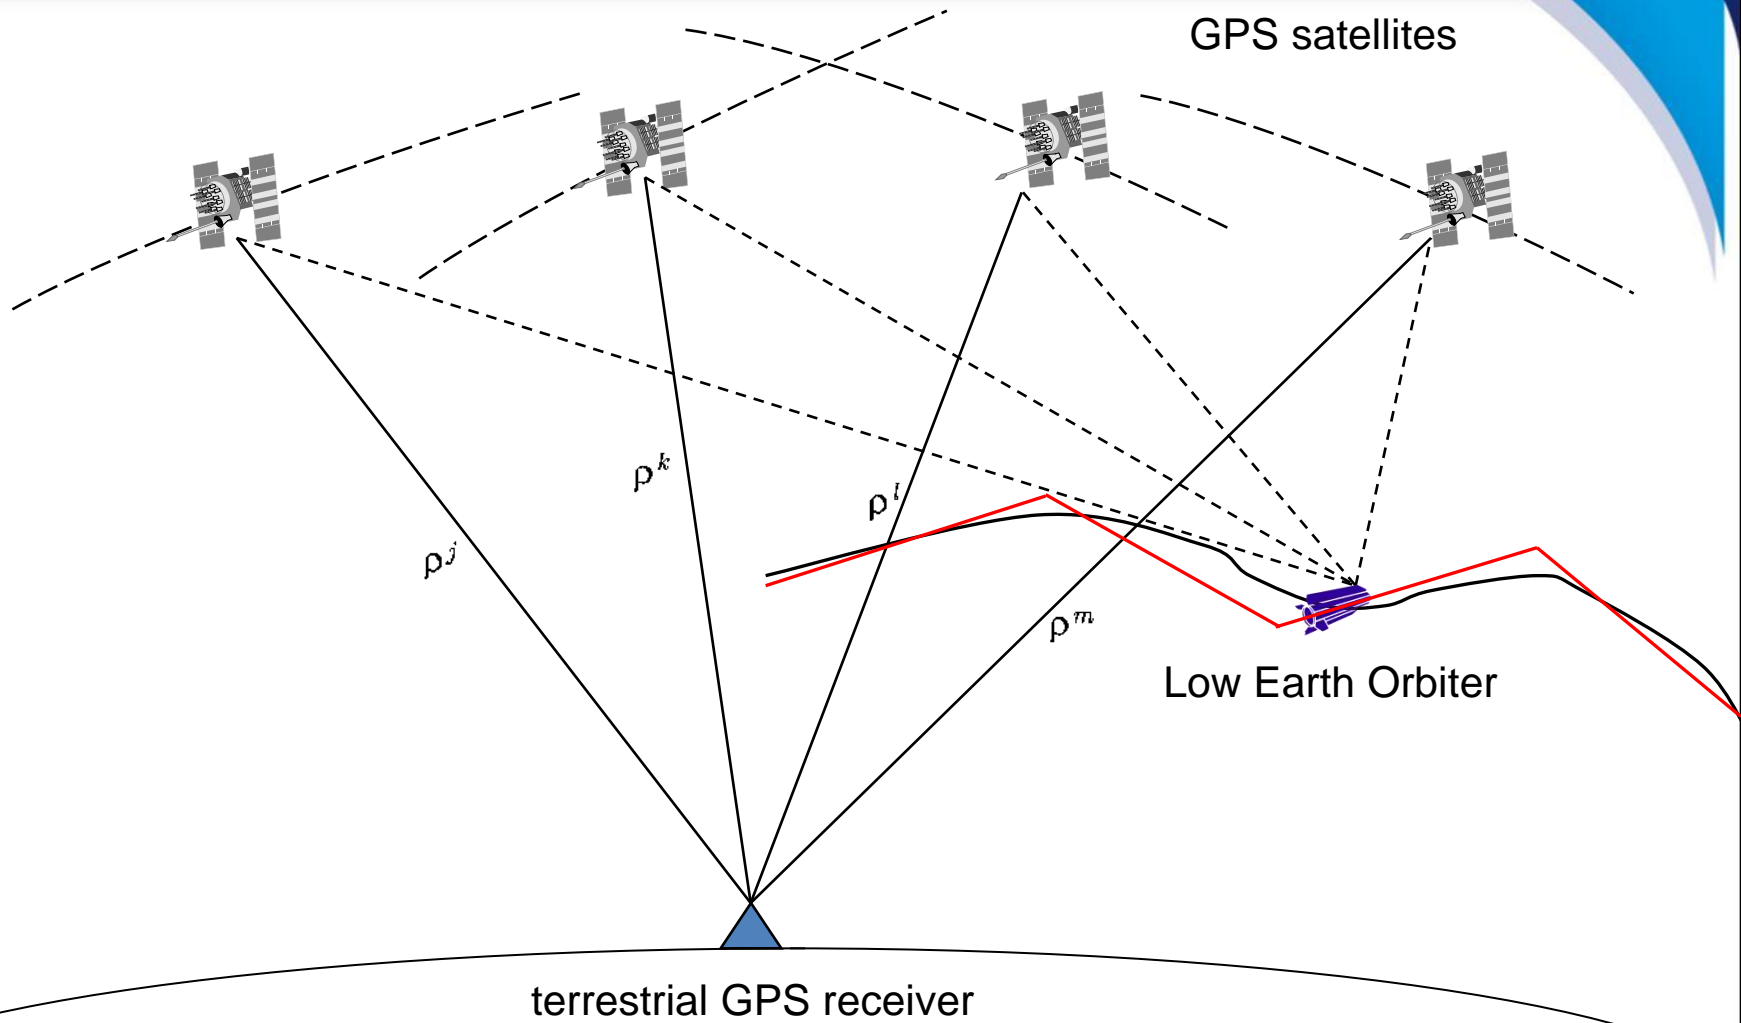


# Least-squares adjustment

linearized observation equations:

$$\Delta \mathbf{l} = \mathbf{A} \cdot \Delta \mathbf{x} - \mathbf{v} \quad \text{with} \quad \mathbf{P} = \sigma_o^2 \mathbf{C}^{-1}$$

covariance matrix:




observed-minus-computed

$$\Delta \mathbf{l} = \begin{pmatrix} l_1' - F_1(\mathbf{x}_0) \\ l_2' - F_2(\mathbf{x}_0) \\ \vdots \\ l_n' - F_n(\mathbf{x}_0) \end{pmatrix}$$




pseudo-observations:

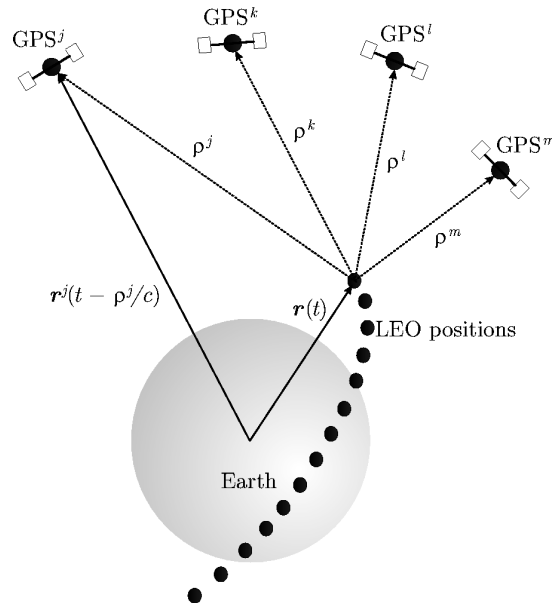

unknown parameters:

$$\Delta \mathbf{x} = \begin{pmatrix} \Delta c_{00} \\ \vdots \\ \Delta c_{nm} \\ \Delta s_{nm} \end{pmatrix}$$

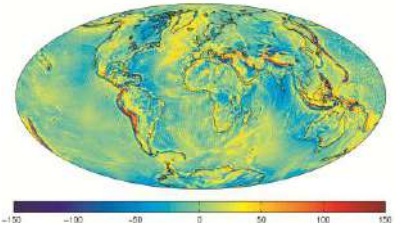

system

$\mathbf{v}$

$$\Delta \mathbf{x} = (\mathbf{A}^T \mathbf{P} \mathbf{A})^{-1} \mathbf{A}^T \mathbf{P} \Delta \mathbf{l}$$



# Geometric distance LEO-GPS

**Geometric distance**  $\rho_{leo}^k$  is given by:

$$\rho_{leo}^k = |\mathbf{r}_{leo}(t_{leo}) - \mathbf{r}^k(t_{leo} - \tau_{leo}^k)|$$

$\mathbf{r}_{leo}$  Inertial position of LEO antenna phase center at reception time

$\mathbf{r}^k$  Inertial position of GPS antenna phase center of satellite  $k$  at emission time

$\tau_{leo}^k$  Signal traveling time between the two phase center positions

Different ways to represent  $\mathbf{r}_{leo}$ :

- **Kinematic** orbit representation
- **Dynamic** or **reduced-dynamic** orbit representation

# Kinematic orbit representation

**Satellite position**  $\mathbf{r}_{leo}(t_{leo})$  (in inertial frame) is given by:


$$\mathbf{r}_{leo}(t_{leo}) = \mathbf{R}(t_{leo}) \cdot (\mathbf{r}_{leo,e,0}(t_{leo}) + \delta\mathbf{r}_{leo,e,ant}(t_{leo}))$$

$\mathbf{R}$	Transformation matrix from Earth-fixed to inertial frame
$\mathbf{r}_{leo,e,0}$	LEO center of mass position in Earth-fixed frame
$\delta\mathbf{r}_{leo,e,ant}$	LEO antenna phase center offset in Earth-fixed frame

**Kinematic positions**  $\mathbf{r}_{leo,e,0}$  are estimated for each **measurement epoch**:

- Measurement epochs **need not** to be identical with nominal epochs
- Positions are **independent** of models describing the LEO dynamics  
Velocities cannot be provided in a strict sense

# Kinematic orbit representation

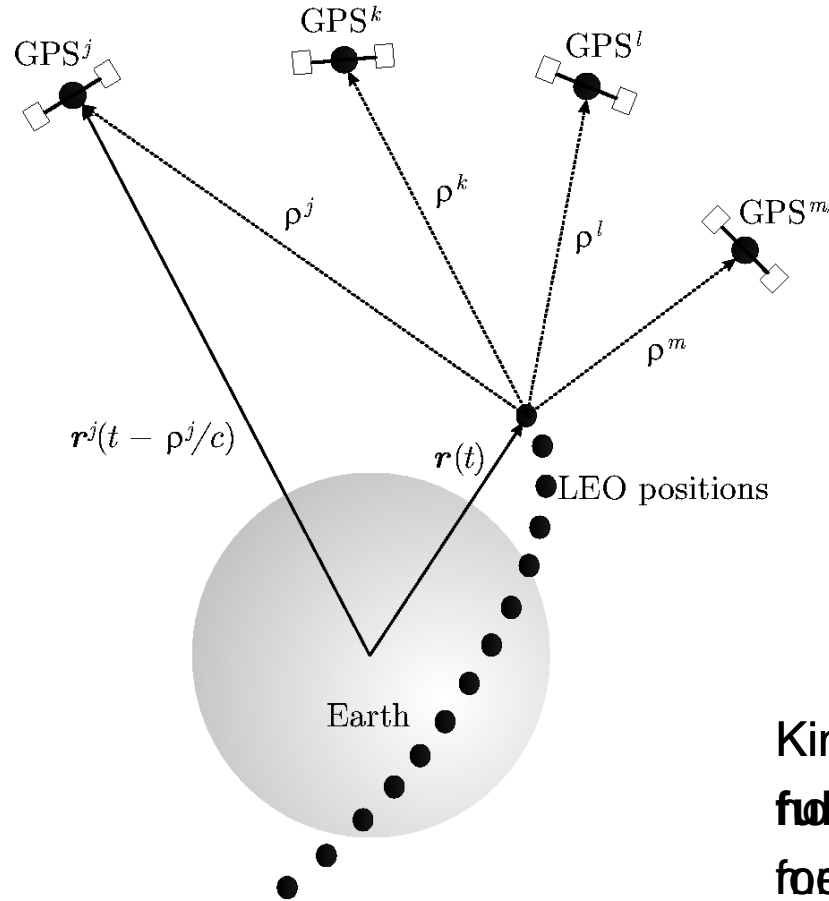

A kinematic orbit is an ephemeris at **discrete** measurement epochs

Kinematic positions are **fully independent** of the force models used for (LEO to atmosphere) interaction

# Kinematic orbit determination

Measurement epochs  
(in GPS time)

Positions (km)  
(Earth-fixed)

* 2009 11 2	0	0	0.80678020			
PL15	-390.612059	6623.987679	73.104149	193219.797196		
* 2009 11 2	0	0	1.80678020			
PL15	-389.240315	6624.166512	65.402457	193219.799413		
* 2009 11 2	0	0	2.80678020			
PL15	-387.868014	6624.336133	57.700679	193219.801634		
* 2009 11 2	0	0	3.80678020			
PL15	-386.495163	6624.496541	49.998817	193219.803855		
* 2009 11 2	0	0	4.80678019			
PL15	-385.121760	6624.647724	42.296889	193219.806059		
* 2009 11 2	0	0	5.80678019			
PL15	-383.747819	6624.789703	34.594896	193219.808280		
* 2009 11 2	0	0	6.80678019			
PL15	-382.373332	6624.922464	26.892861	193219.810495		
* 2009 11 2	0	0	7.80678019			
PL15	-380.998306	6625.046003	19.190792	193219.812692		
* 2009 11 2	0	0	8.80678019			
PL15	-379.622745	6625.160329	11.488692	193219.814899		
* 2009 11 2	0	0	9.80678018			
PL15	-378.246651	6625.265448	3.786580	193219.817123		

Clock correction to  
nominal epoch ( $\mu$ s),  
e.g., to epoch  
00:00:03

Excerpt of kinematic GOCE positions at begin of 2 Nov, 2009  
GO\_CONS\_SST\_PKI\_2\_20091101T235945\_20091102T235944\_0001 Times in UTC

# Dynamic orbit representation

**Satellite position**  $\mathbf{r}_{leo}(t_{leo})$  (in inertial frame) is given by:

$$\mathbf{r}_{leo}(t_{leo}) = \mathbf{r}_{leo,0}(t_{leo}; a, e, i, \Omega, \omega, u_0; Q_1, \dots, Q_d) + \delta\mathbf{r}_{leo,ant}(t_{leo})$$

$\mathbf{r}_{leo,0}$	LEO center of mass position
$\delta\mathbf{r}_{leo,ant}$	LEO antenna phase center offset
$a, e, i, \Omega, \omega, u_0$	LEO initial osculating orbital elements
$Q_1, \dots, Q_d$	LEO dynamical parameters

**Satellite trajectory**  $\mathbf{r}_{leo,0}$  is a particular solution of an **equation of motion**

- One set of **initial conditions** (orbital elements) is estimated per arc  
Dynamical parameters of the force model on request

# Dynamic orbit representation

**Equation of motion** (in inertial frame) is given by:

$$\ddot{\mathbf{r}} = -GM \frac{\mathbf{r}}{r^3} + \mathbf{f}_1(t, \mathbf{r}, \dot{\mathbf{r}}, Q_1, \dots, Q_d)$$


with initial conditions

$$\mathbf{r}(t_0) = \mathbf{r}(a, e, i, \Omega, \omega, u_0; t_0)$$


$$\dot{\mathbf{r}}(t_0) = \dot{\mathbf{r}}(a, e, i, \Omega, \omega, u_0; t_0)$$

The **acceleration**  $\mathbf{f}_1$  consists of **gravitational** and **non-gravitational** perturbations taken into account to model the satellite trajectory. Unknown parameters  $Q_1, \dots, Q_d$  of force models may appear in the equation of motion together with deterministic (known) accelerations given by analytical models.

# Osculating orbital elements

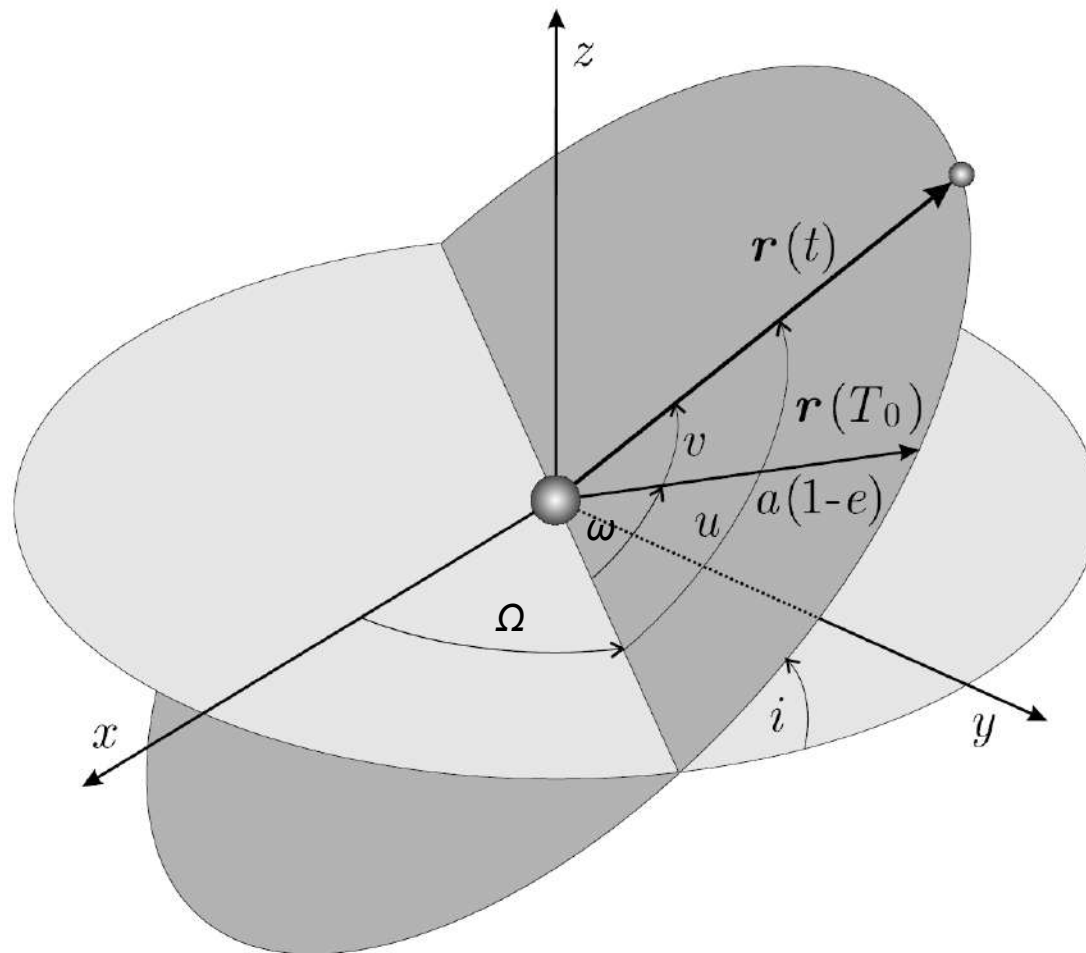


# Osculating orbital elements of GOCE

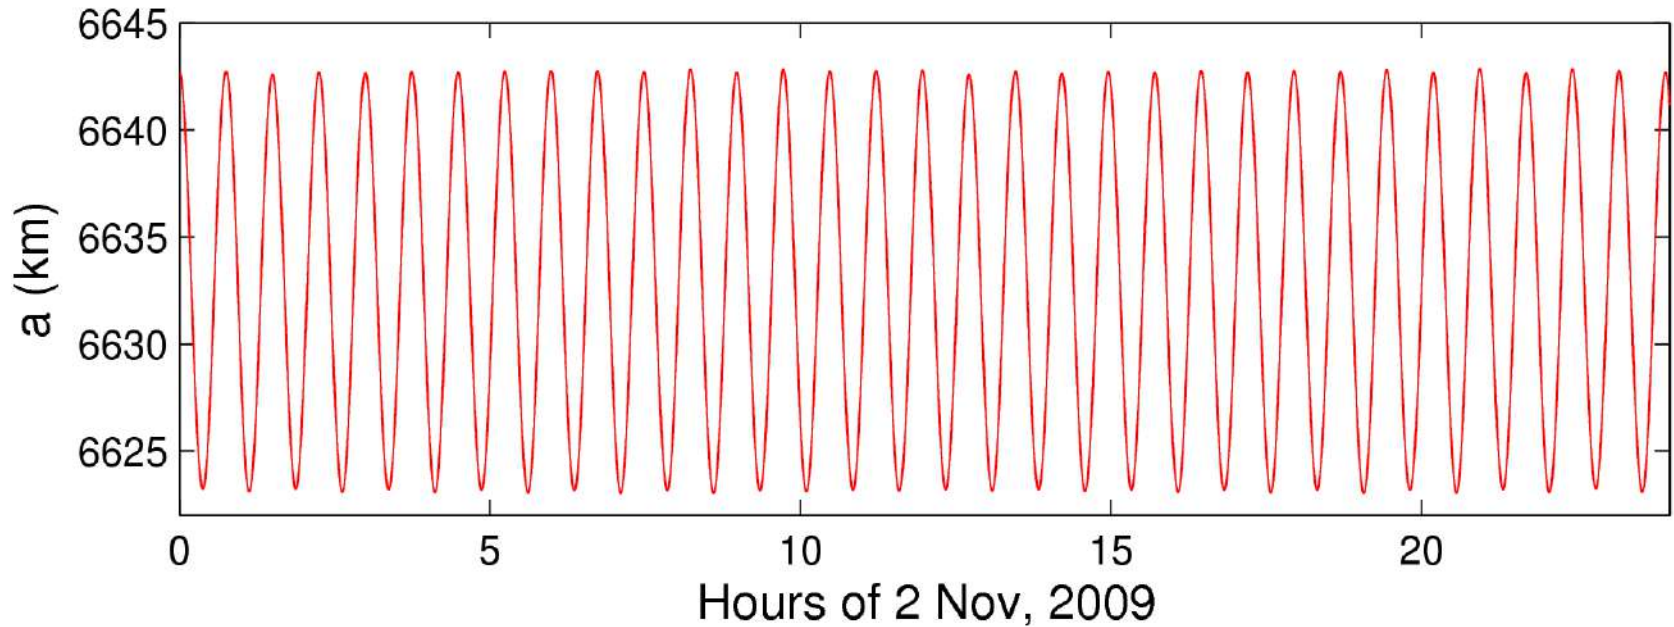

## Semi-major axis:

Twice-per-revolution variations of about  $\pm 10$  km around the mean semi-major axis of 6632.9 km, which corresponds to a mean altitude of 254.9 km


# Osculating orbital elements of GOCE

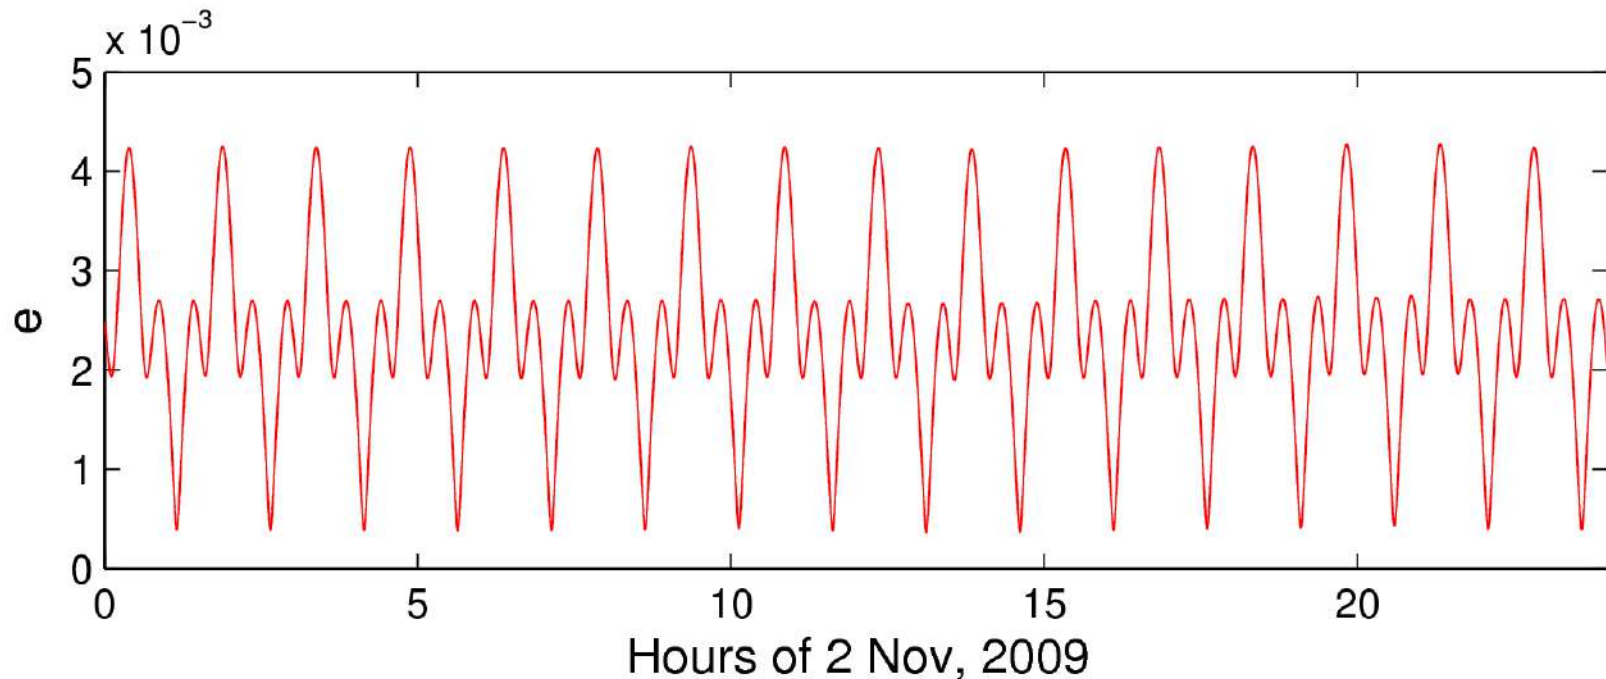

## Numerical eccentricity:

Small, short-periodic variations around the mean value of about 0.0025, i.e., the orbit is close to circular


# Osculating orbital elements of GOCE

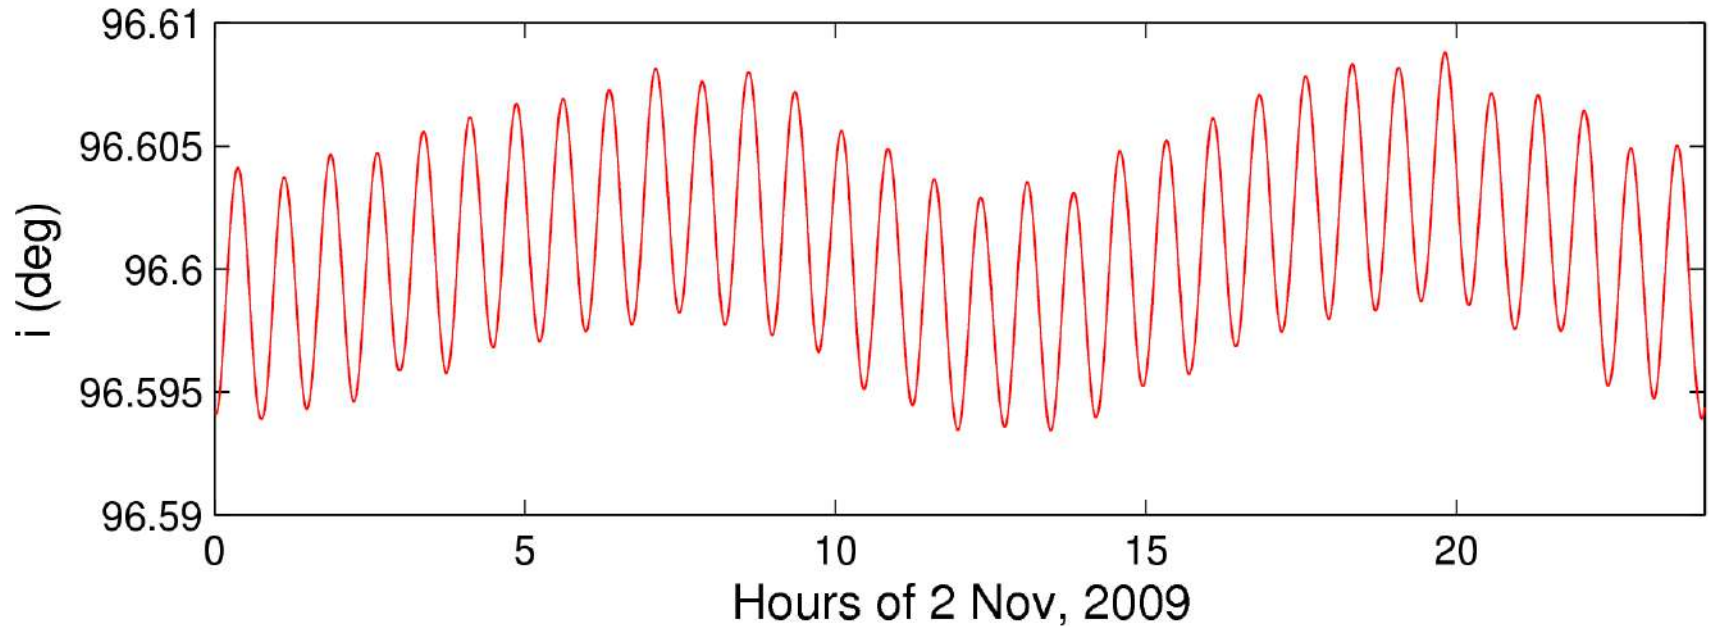

## Inclination:

Twice-per-revolution and longer variations around the mean inclination of about  $96.6^\circ$  (sun-synchronous orbit)


# Osculating orbital elements of GOCE

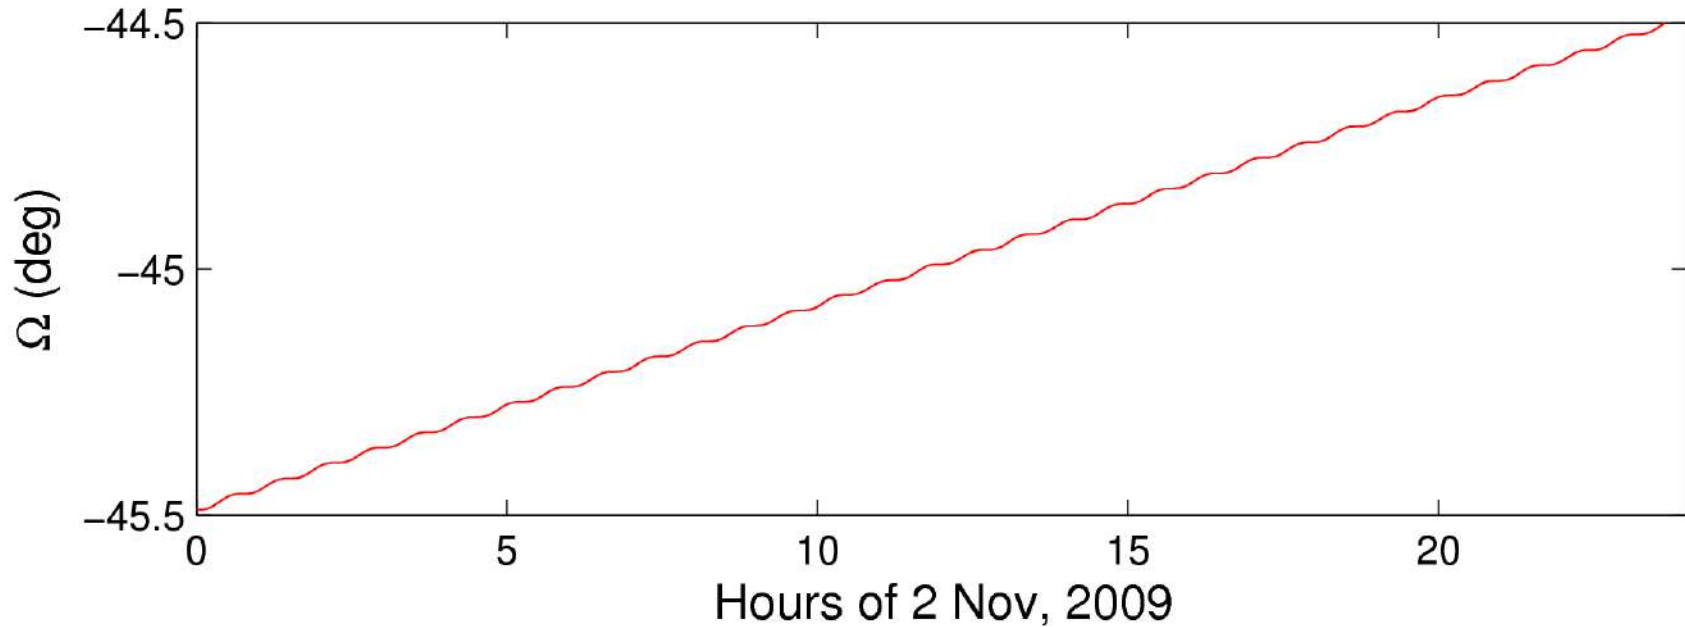

## Right ascension of ascending node:

Twice-per-revolution variations and linear drift of about  $+1^\circ/\text{day}$  ( $360^\circ/365\text{days}$ ) due to the sun-synchronous orbit

# Dynamic orbit representation

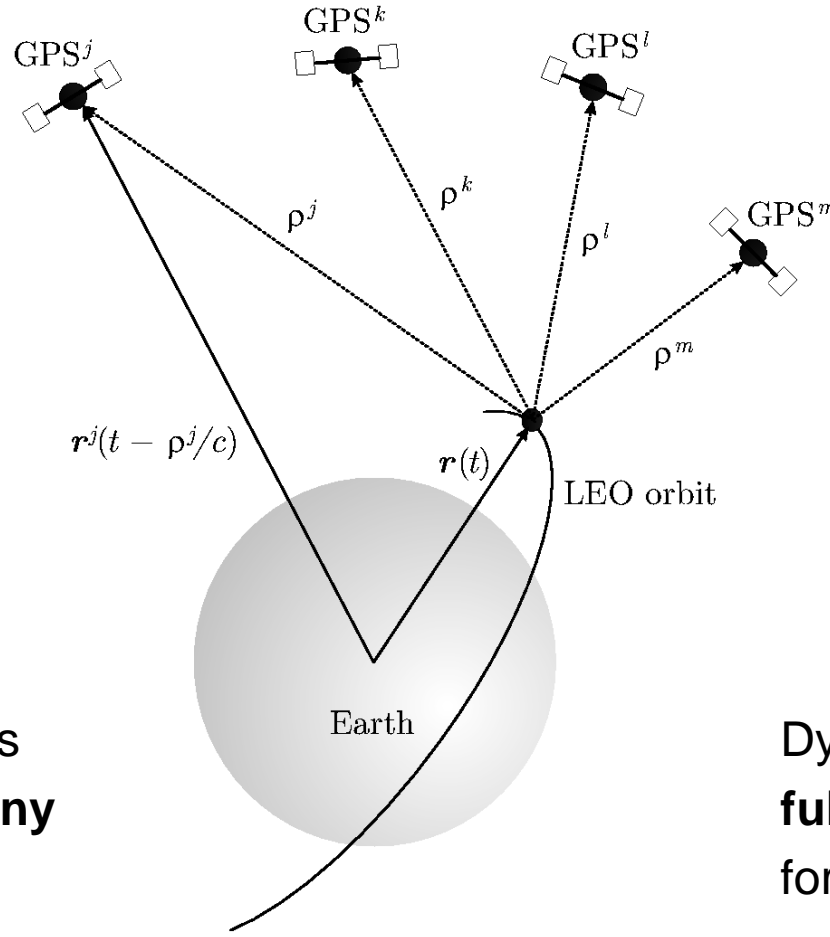

Dynamic orbit positions may be computed at **any epoch** within the arc

Dynamic positions are **fully dependent** on the force models used, e.g., on the gravity field model

# Reduced-dynamic orbit representation

**Equation of motion** (in inertial frame) is given by:

$$\ddot{\mathbf{r}} = -GM \frac{\mathbf{r}}{r^3} + \mathbf{f}_1(t, \mathbf{r}, \dot{\mathbf{r}}, Q_1, \dots, Q_d, P_1, \dots, P_s)$$


$P_1, \dots, P_s$

Pseudo-stochastic parameters

**Pseudo-stochastic** parameters are:

- additional empirical parameters characterized by a priori known **statistical properties**, e.g., by expectation values and a priori variances
- useful to **compensate** for deficiencies in dynamic models, e.g., deficiencies in models describing non-gravitational accelerations
- often set up as **piecewise constant accelerations** to ensure that satellite trajectories are continuous and differentiable at any epoch

# Reduced-dynamic orbit representation

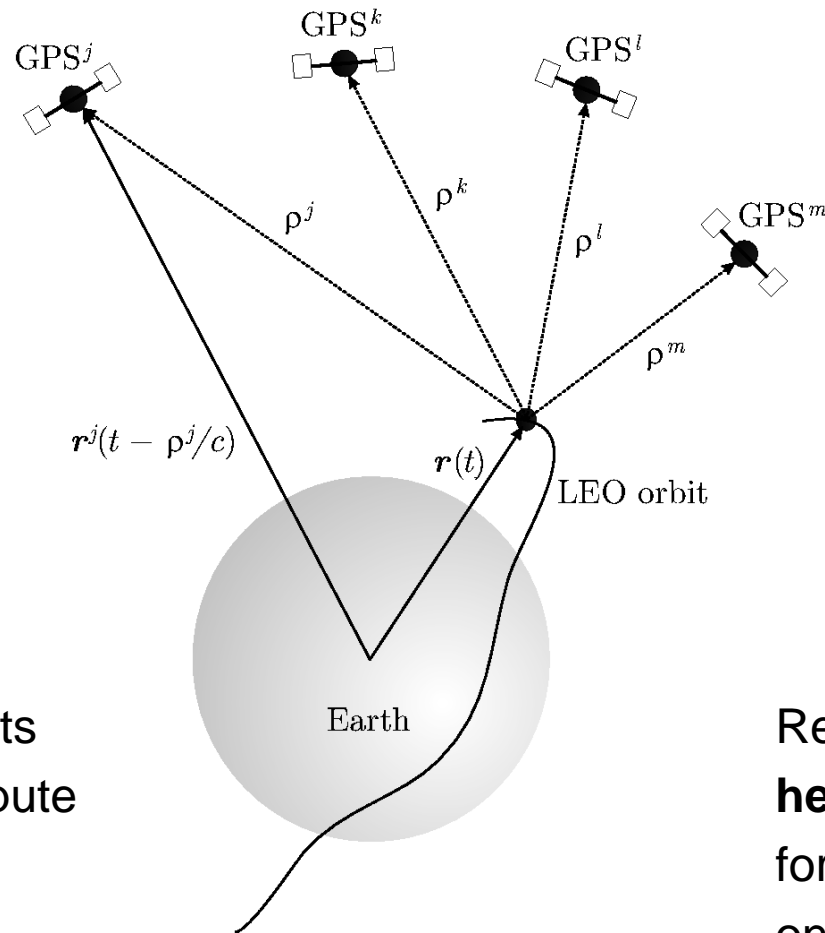

Reduced-dynamic orbits  
are well suited to compute  
LEO orbits of **highest  
quality**

Reduced-dynamic orbits  
**heavily depend** on the  
force models used, e.g.,  
on the gravity field model

# ***Perturbations acting on LEOs***


<b>Perturbation</b>	<b>Acceleration (m/s<sup>2</sup>)</b>
Main term of Earth's gravity field	8.42
Oblateness	0.015
Atmospheric drag	0.00000079
Higher terms of Earth's gravity field	0.00025
Lunar attraction	0.0000054
Solar attraction	0.0000005
Direct radiation pressure	0.000000097
.	.

The orders of magnitude refer to:

- orbital altitude of 500 km
- area-to-mass ratio of 0.02 m<sup>2</sup>/kg

# Gravitational perturbations

$$V(r, \theta, \lambda) = \frac{GM}{R} \sum_{l=0}^{l_{\max}} \left( \frac{R}{r} \right)^{l+1} \sum_{m=0}^l \bar{P}_{lm}(\cos \theta) \cdot \left[ \bar{C}_{lm} \cos(m\lambda) + \bar{S}_{lm} \sin(m\lambda) \right]$$

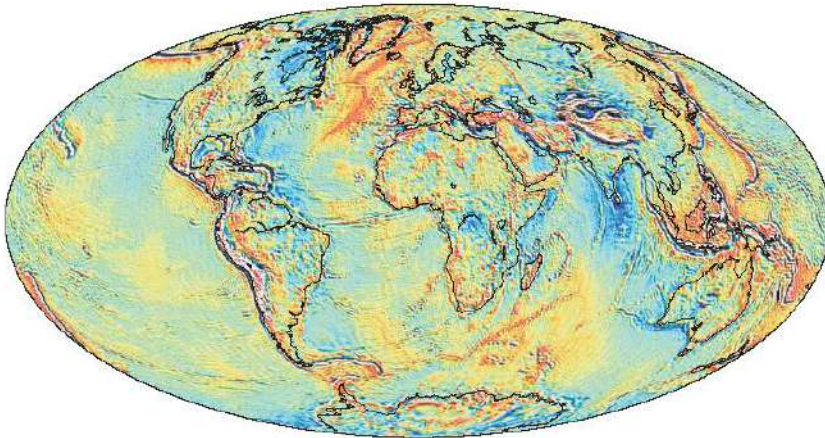

Gravity anomalies (in mgal)

CHAMP  
GRACE  
GOCE

$l_{\max}$	# of coeff.	$\lambda$ [km]
20	441	1000
100	10 201	200
200	40 401	100
250	63 001	80

$\lambda$  ... spatial (half) wavelength

Depending on the LEO orbital altitude, gravity field coefficients have to be taken into account up to different maximum degrees and orders for precise orbit determination, e.g., at least up to about degree and order 160 for GOCE POD

# Partial derivatives

**Orbit improvement** ( $\mathbf{r}_0(t)$ ): numerically integrated **a priori orbit**):

$$\mathbf{r}(t) = \mathbf{r}_0(t) + \sum_{i=1}^n \frac{\partial \mathbf{r}_0}{\partial P_i}(t) \cdot (P_i - P_{0,i})$$

yields corrections to a priori parameter values  $P_{0,i}$  by **least-squares**

Previously, for each parameter  $P_i$  the corresponding **variational equation**

$$\ddot{\mathbf{z}}_{P_i} = \mathbf{A}_0 \cdot \mathbf{z}_{P_i} + \mathbf{A}_1 \cdot \dot{\mathbf{z}}_{P_i} + \frac{\partial \mathbf{f}_1}{\partial P_i}$$

has to be solved to obtain the partials  $\mathbf{z}_{P_i}(t) \doteq \frac{\partial \mathbf{r}_0}{\partial P_i}(t)$ , e.g., by:

- Numerical integration for initial osculating elements
- Numerical quadrature for dynamic parameters
- Linear combinations for pseudo-stochastic parameters

# Reduced-dynamic orbit representation

Positions (km) &  
Velocities (dm/s)  
(Earth-fixed)

Position epochs  
(in GPS time)

* 2009 11 2	0	0	0.00000000		
PL15	-391.718353	6623.836682	79.317661	999999.999999	
VL15	13710.157683	1908.731015	-77015.601314	999999.999999	
* 2009 11 2	0	0	10.00000000		
PL15	-377.980705	6625.284690	2.298385	999999.999999	
VL15	13764.602016	987.250587	-77021.193676	999999.999999	
* 2009 11 2	0	0	20.00000000		
PL15	-364.190222	6625.811136	-74.721213	999999.999999	
VL15	13815.825127	65.631014	-77016.232293	999999.999999	
* 2009 11 2	0	0	30.00000000		
PL15	-350.350131	6625.415949	-151.730567	999999.999999	
VL15	13863.820409	-855.995477	-77000.719734	999999.999999	
* 2009 11 2	0	0	40.00000000		
PL15	-336.463660	6624.099187	-228.719134	999999.999999	
VL15	13908.581905	-1777.497047	-76974.660058	999999.999999	
* 2009 11 2	0	0	50.00000000		
PL15	-322.534047	6621.861041	-305.676371	999999.999999	
VL15	13950.104280	-2698.741871	-76938.058807	999999.999999	
* 2009 11 2	0	1	0.00000000		
PL15	-308.564533	6618.701833	-382.591743	999999.999999	
VL15	13988.382807	-3619.598277	-76890.923043	999999.999999	

Clock corrections  
are not provided


Excerpt of reduced-dynamic GOCE positions at begin of 2 Nov, 2009  
GO\_CONS\_SST\_PRD\_2\_\_20091101T235945\_20091102T235944\_0001

# LEO sensor offsets


## Phase center offsets $\delta \mathbf{r}_{leo,ant}$ :

- are needed in the inertial or Earth-fixed frame and have to be transformed from the satellite frame using **attitude data** from the star-trackers
- consist of a frequency-independent **instrument offset**, e.g., defined by the center of the instrument's mounting plane (CMP) in the satellite frame
- consist of frequency-dependent **phase center offsets** (PCOs), e.g., defined wrt the center of the instrument's mounting plane in the antenna frame (ARF)
- consist of frequency-dependent **phase center variations** (PCVs) varying with the direction of the incoming signal, e.g., defined wrt the PCOs in the antenna frame

# LEO sensor offsets

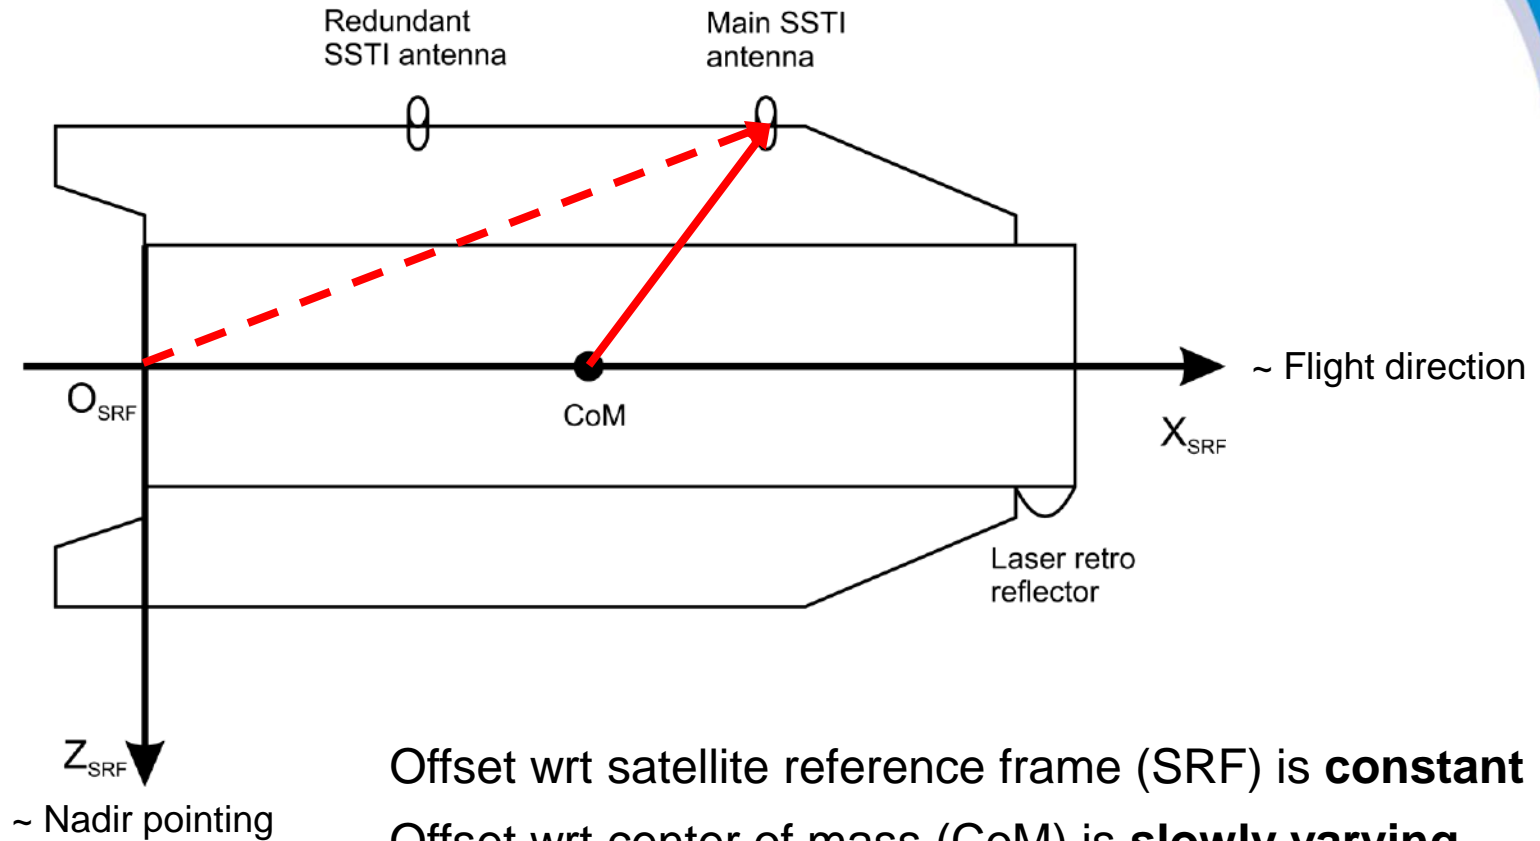


# GOCE mission

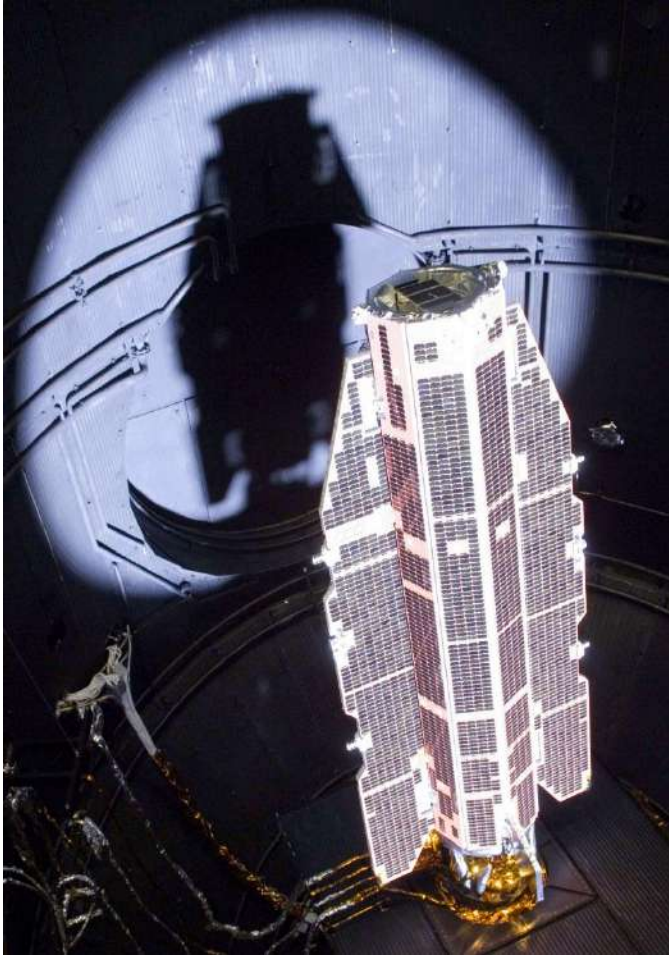

Courtesy: ESA

- Gravity and steady-state Ocean Circulation Explorer (**GOCE**)
- First Earth Explorer of the Living Planet Program of the European Space Agency
- Launch: 17 March 2009 from Plesetsk, Russia
- Sun-synchronous dusk-dawn orbit with an inclination of  $96.6^\circ$
- Altitude: 254.9 km
- Mass: 1050 kg at launch
- 5.3 m long,  $1.1 \text{ m}^2$  cross section


# GOCE orbit

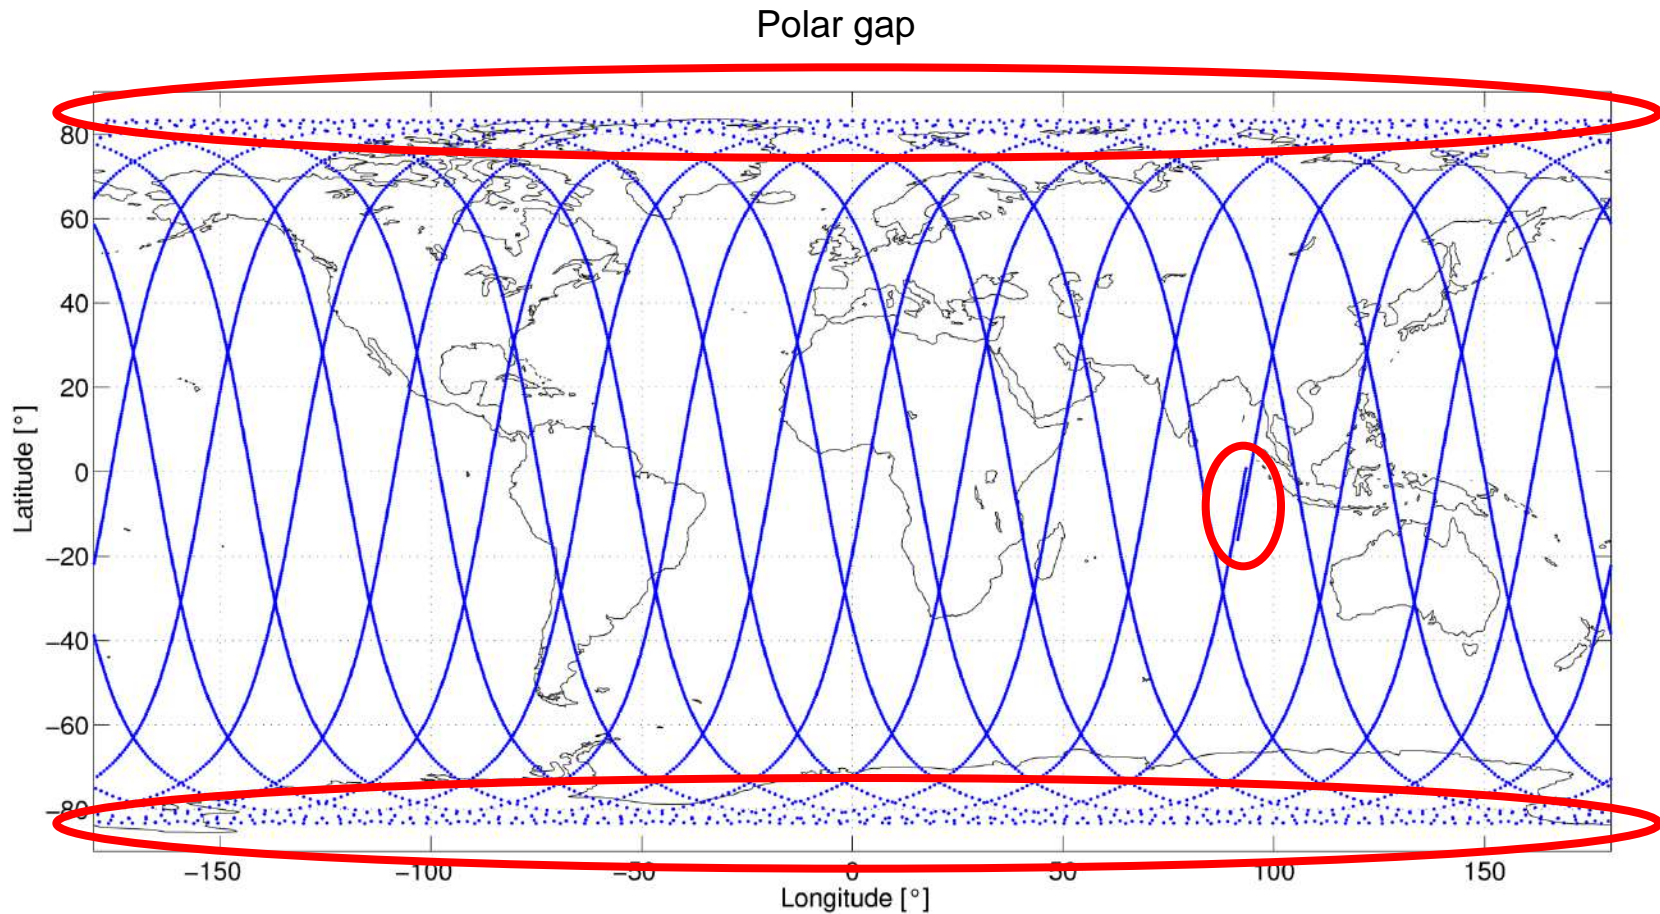

Ground-track coverage on 2 Nov, 2009

Complete geographical coverage after  
979 revolutions (repeat-cycle of 61 days)

# GOCE core instrument

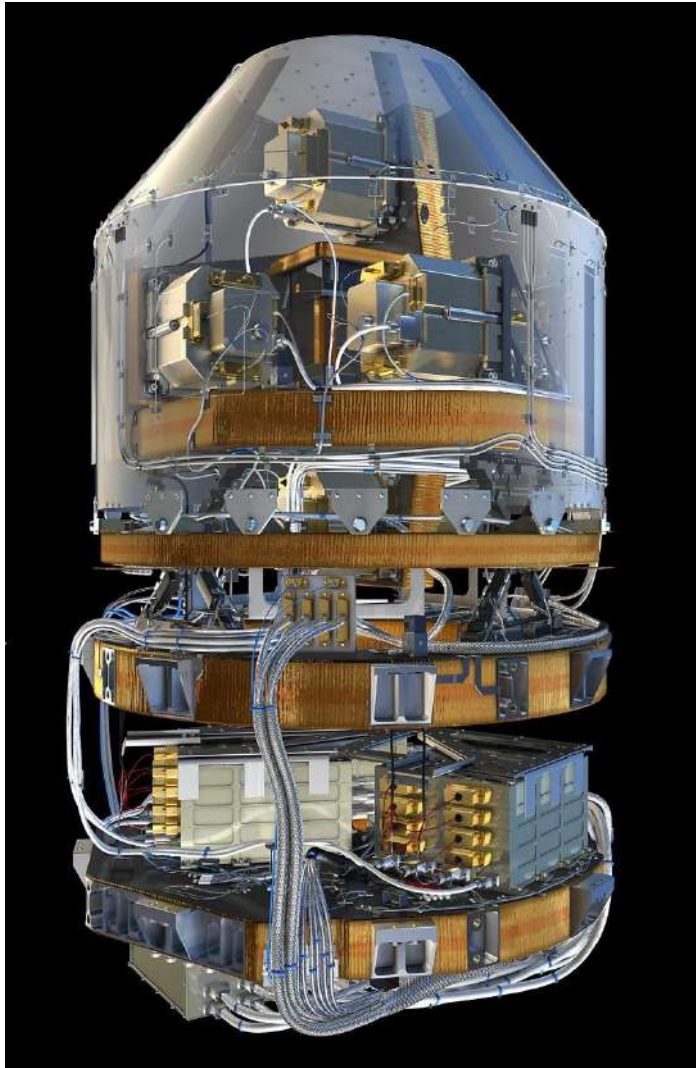

Courtesy: ESA

## Core payload:

Electrostatic Gravity Gradiometer

three pairs of accelerometers

0.5 m arm length

## Main mission goals:

Determination of the Earth's gravity field  
with an accuracy of  $1\text{mGal}$  ( $= 10^{-5} \text{ m/s}^2$ )  
at a spatial resolution of 100 km


## Accelerometer noise:

ACC14:  $3.9 \cdot 10^{-12} \text{ m/s}^2/\text{Hz}^{1/2}$

ACC25:  $3.1 \cdot 10^{-12} \text{ m/s}^2/\text{Hz}^{1/2}$

ACC36:  $6.7 \cdot 10^{-12} \text{ m/s}^2/\text{Hz}^{1/2}$


# GOCE attitude control

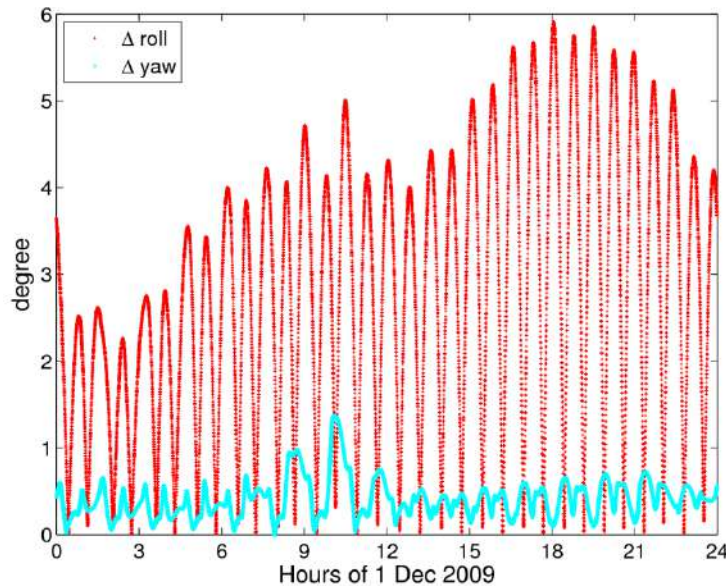

Courtesy: ESA

- Three axes stabilized, nadir pointing, aerodynamically shaped satellite
- Drag-free attitude control (DFAC) in flight direction employing a proportional Xe electric propulsion system
- Very rigid structure, no moving parts
- Attitude control by magnetorquers
- **Attitude measured by star cameras**
- **=> used for orbit determination**

# GOCE SSTI

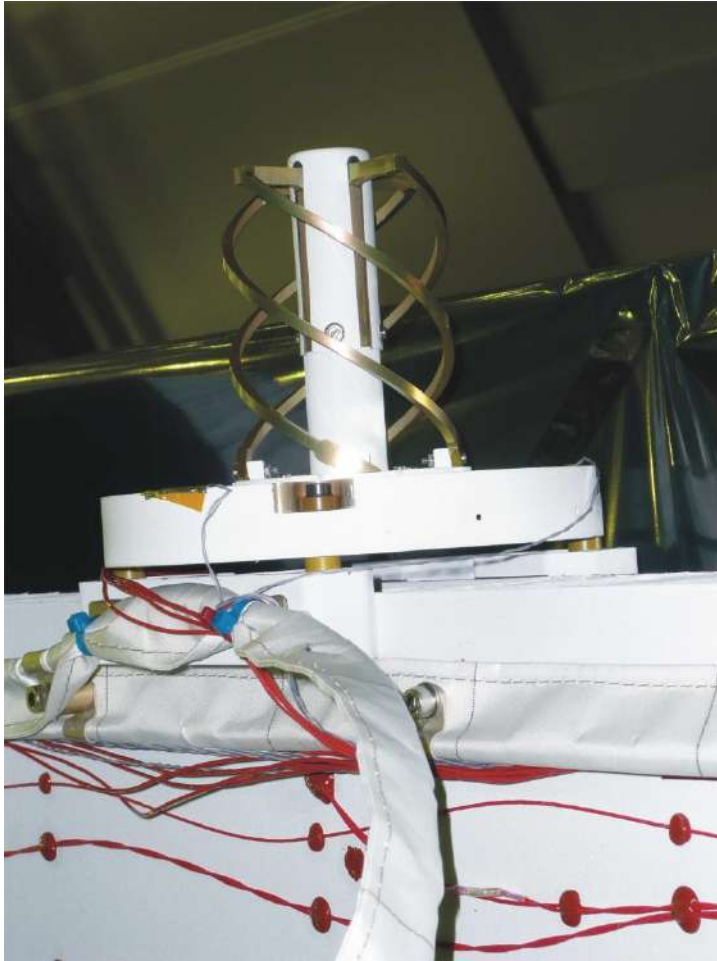


Courtesy: ESA

- **Satellite-to-Satellite Tracking Instrument (SSTI)**
  - Dual-frequency L1, L2
  - 12 channel GPS receiver
  - Real time position and velocity (3D, 3 sigma < 100 m, < 0.3 m/s)
  - 1 Hz data rate
  - => Primary instrument for orbit determination
- 
- **=> Mission requirement for precise science orbits: 2 cm (1D RMS)**


# GOCE GPS antenna

## L1, L2, Lc phase center offsets

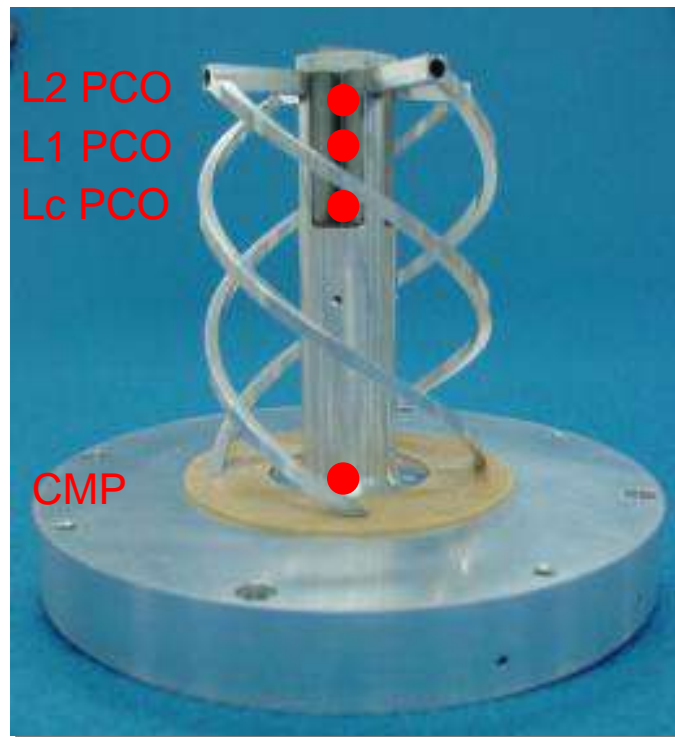


Measured from ground calibration  
in anechoic chamber

## Lc phase center variations

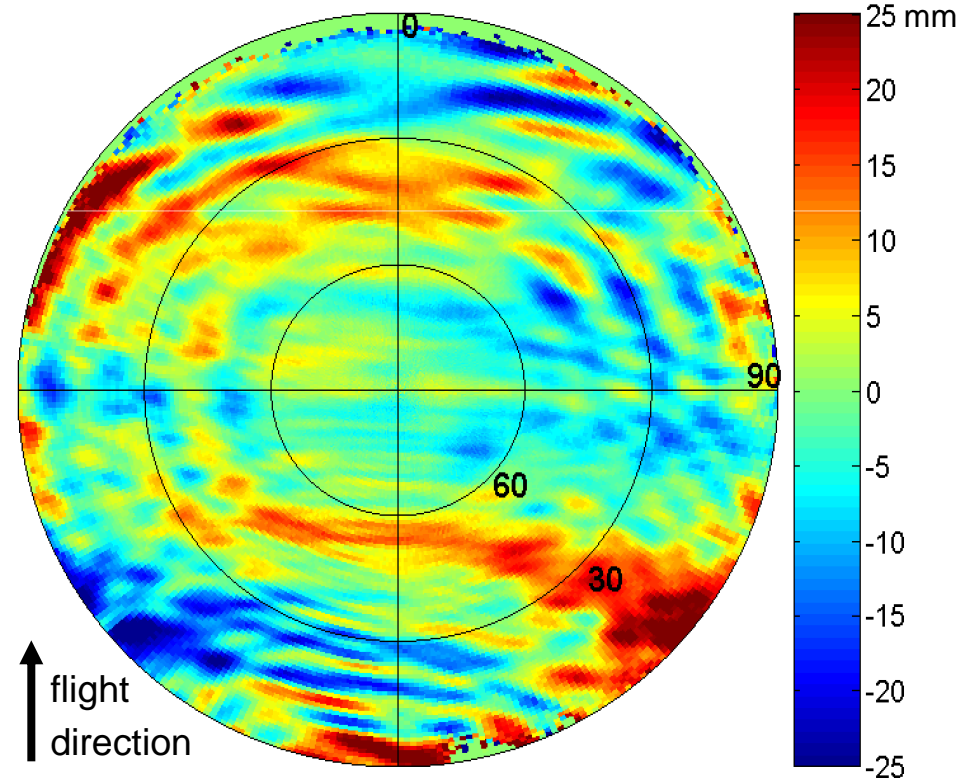

Empirically derived during orbit determination

# GOCE High-level Processing Facility

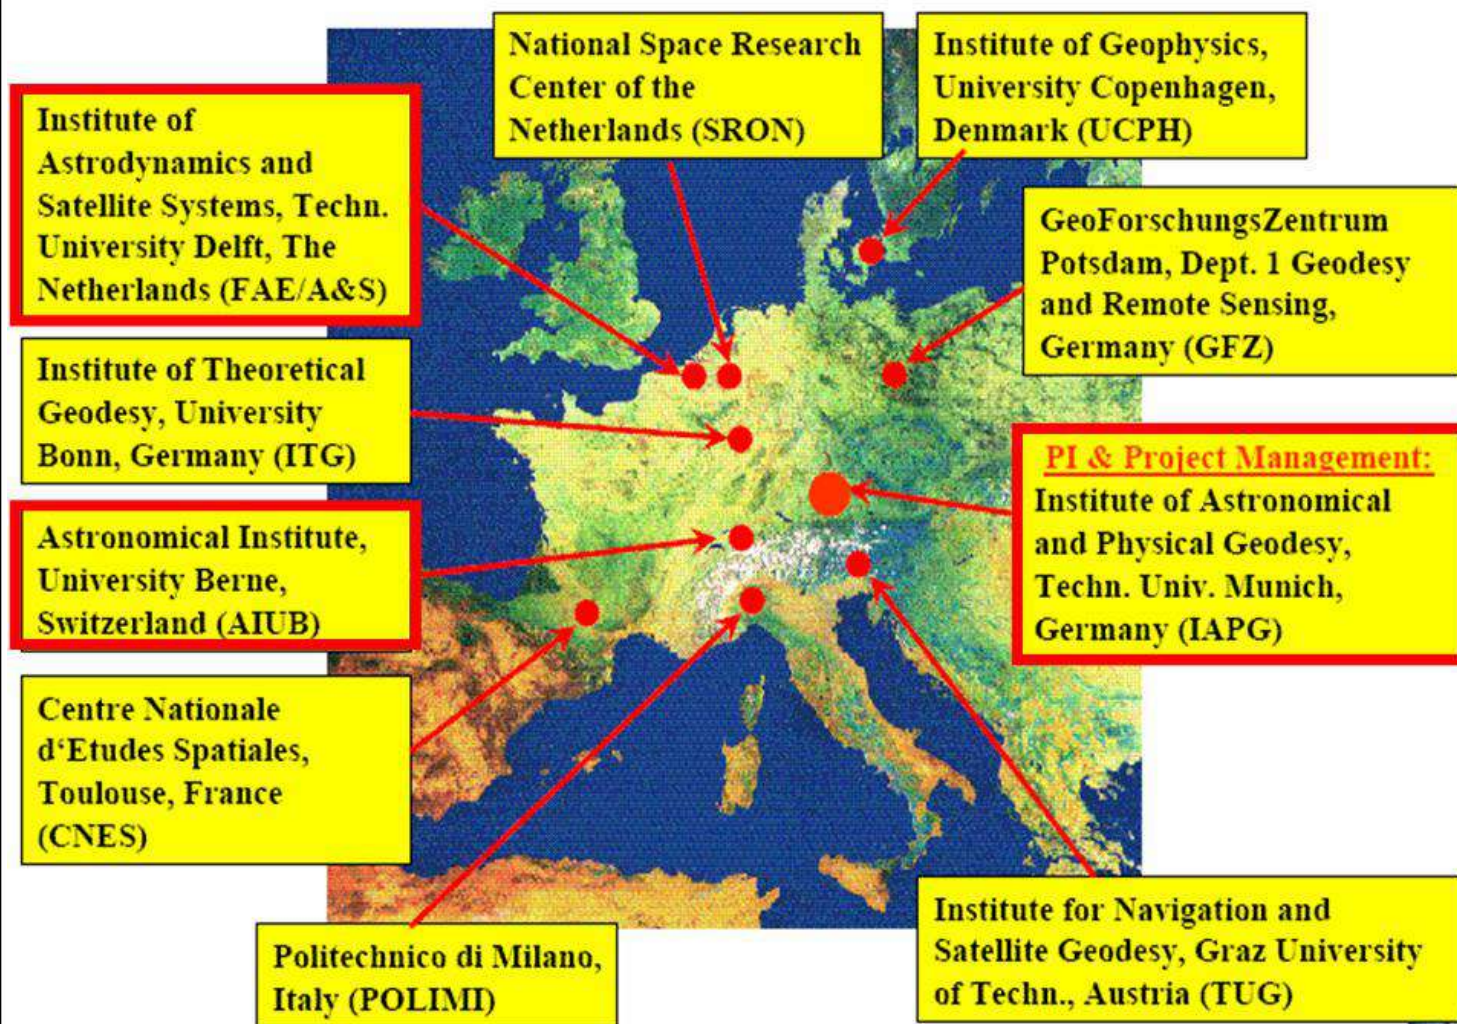

Responsibilities:


DEOS => **RSO**  
(Rapid Science Orbit)

AIUB => **PSO**  
(Precise Science Orbit)

IAPG => Validation



# Co-rotating orbital frames

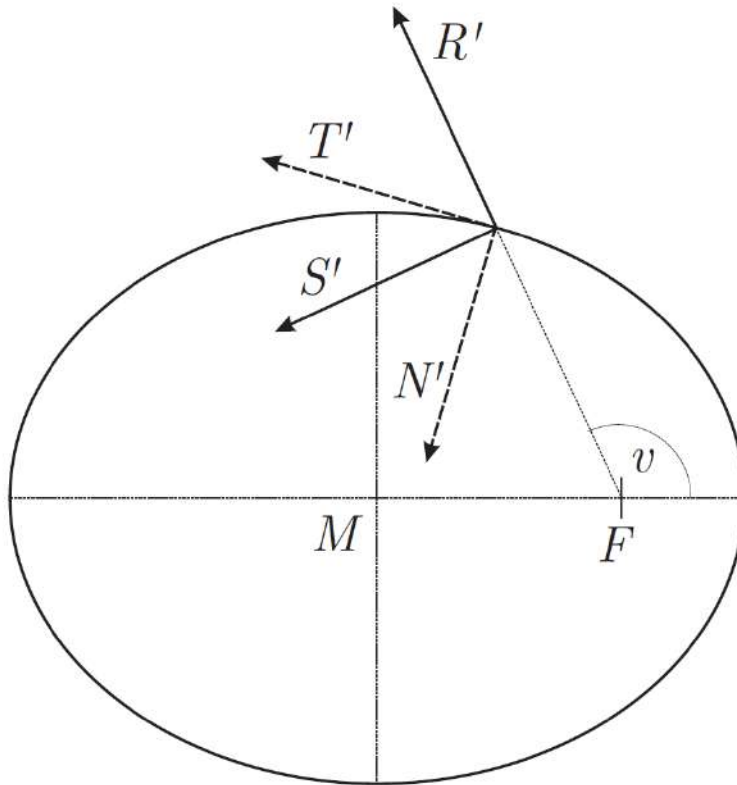

**$\mathbf{R}'$ ,  $\mathbf{S}'$ ,  $\mathbf{W}'$**  unit vectors are pointing:

- into the radial direction
- normal to  $\mathbf{R}'$  in the orbital plane
- normal to the orbital plane (cross-track)


**$\mathbf{T}'$ ,  $\mathbf{N}'$ ,  $\mathbf{W}'$**  unit vectors are pointing:

- into the tangential (along-track) direction
- normal to  $\mathbf{T}'$  in the orbital plane
- normal to the orbital plane (cross-track)

Small eccentricities:  $\mathbf{S}' \sim \mathbf{T}'$  (velocity direction)


# Orbit differences *KIN-RD*

Differences at  
epochs of kin.  
positions

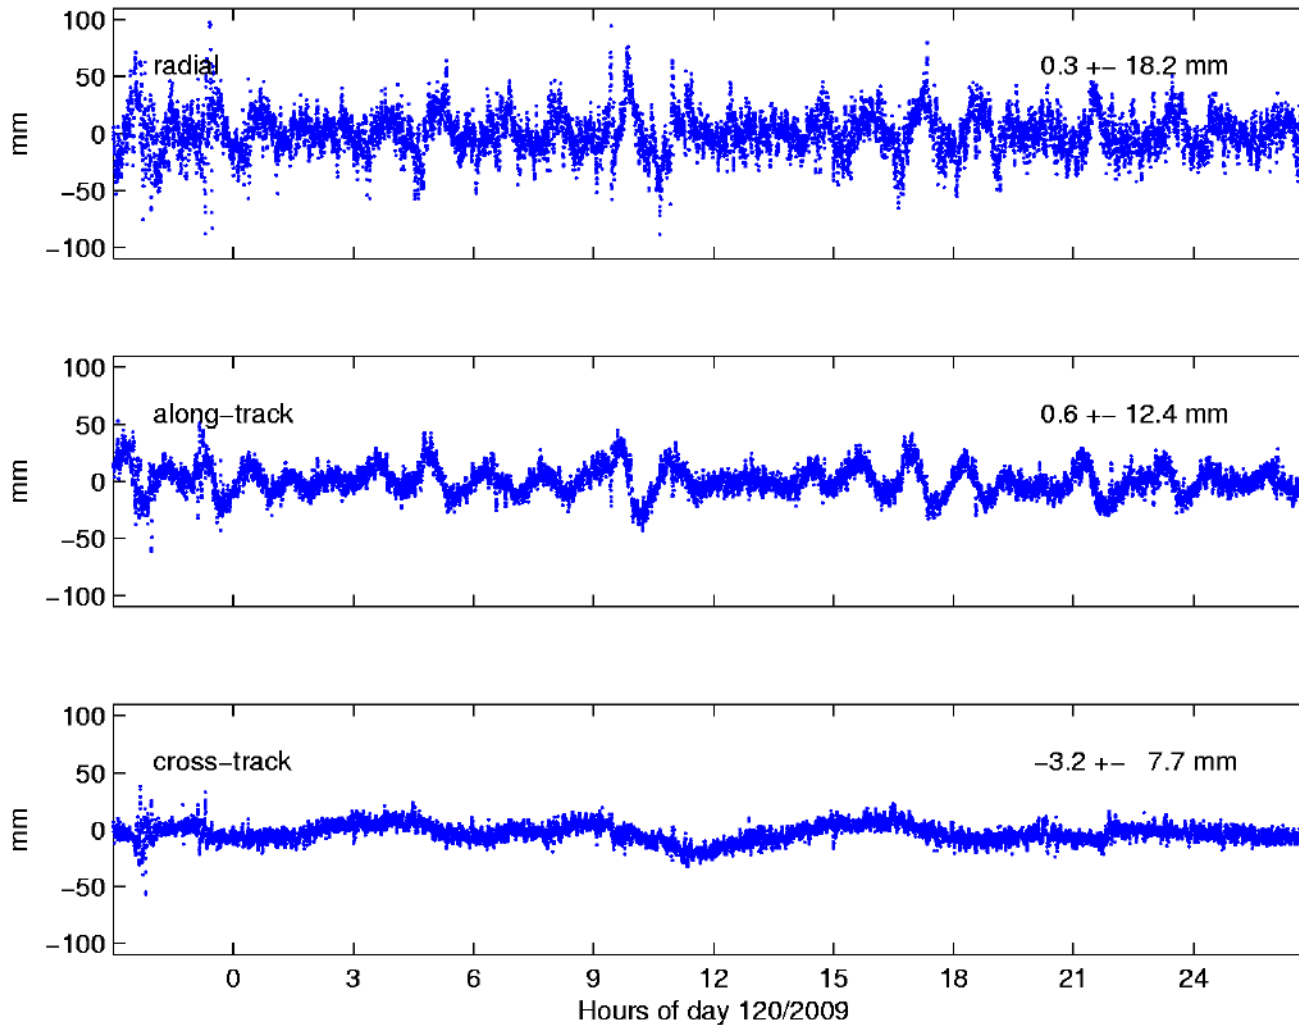


# Orbit differences *KIN-RD*, time-differenced

Largest scatter of  
kin. positions

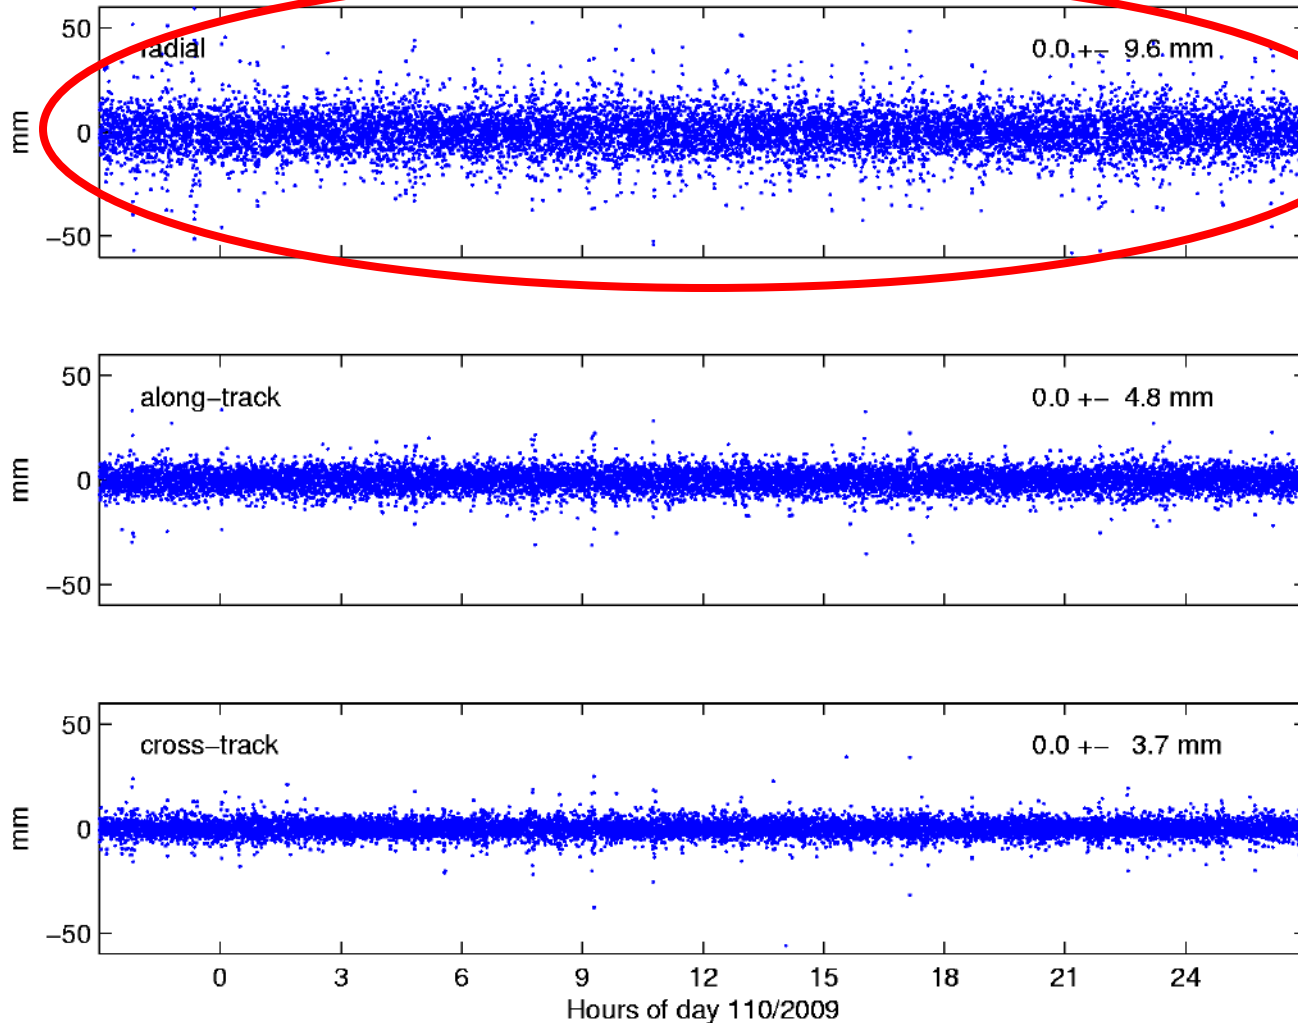

# Pseudo-stochastic accelerations

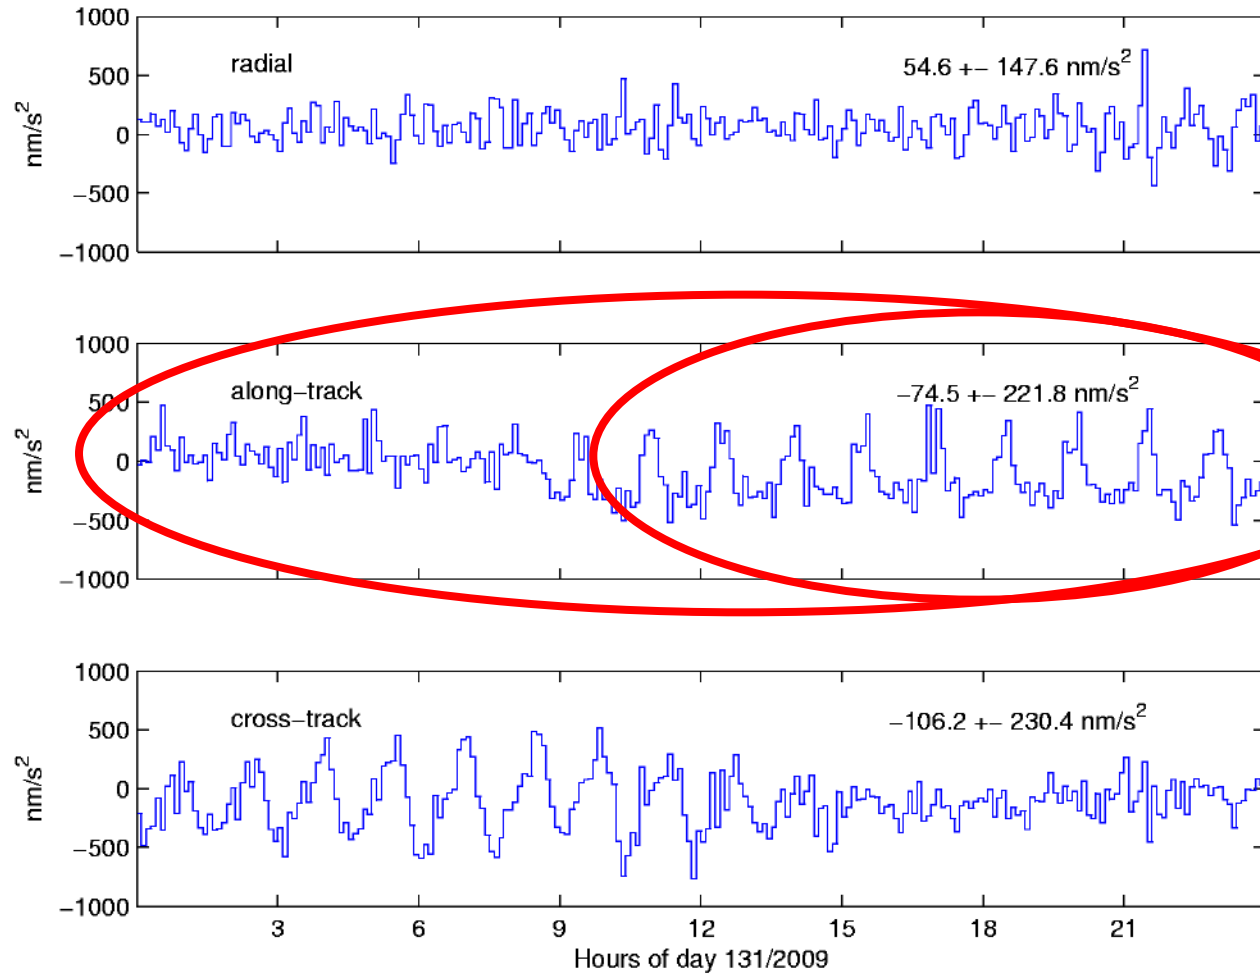


Estimated  
flight on 7-May


# Improving orbit determination

**PCV modeling** is one of the limiting factors for most precise LEO orbit determination. Unmodeled PCVs are systematic errors, which

- **directly** propagate into kinematic orbit determination and severely degrade the position estimates
- propagate into reduced-dynamic orbit determination to a smaller, **but still large extent**

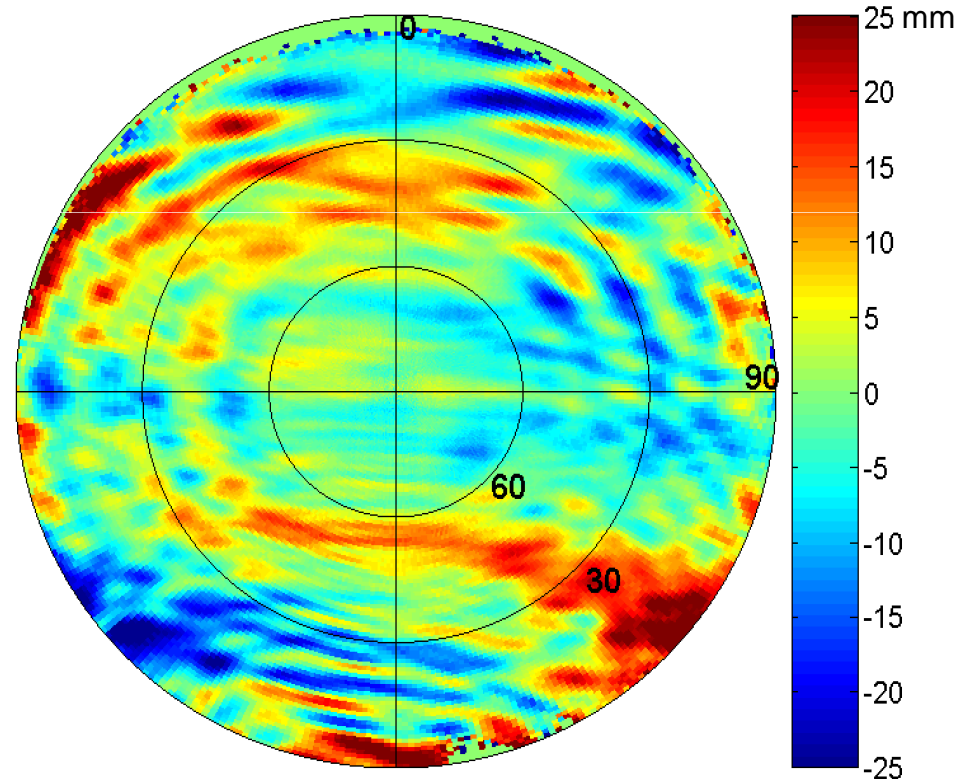


# Improving orbit determination

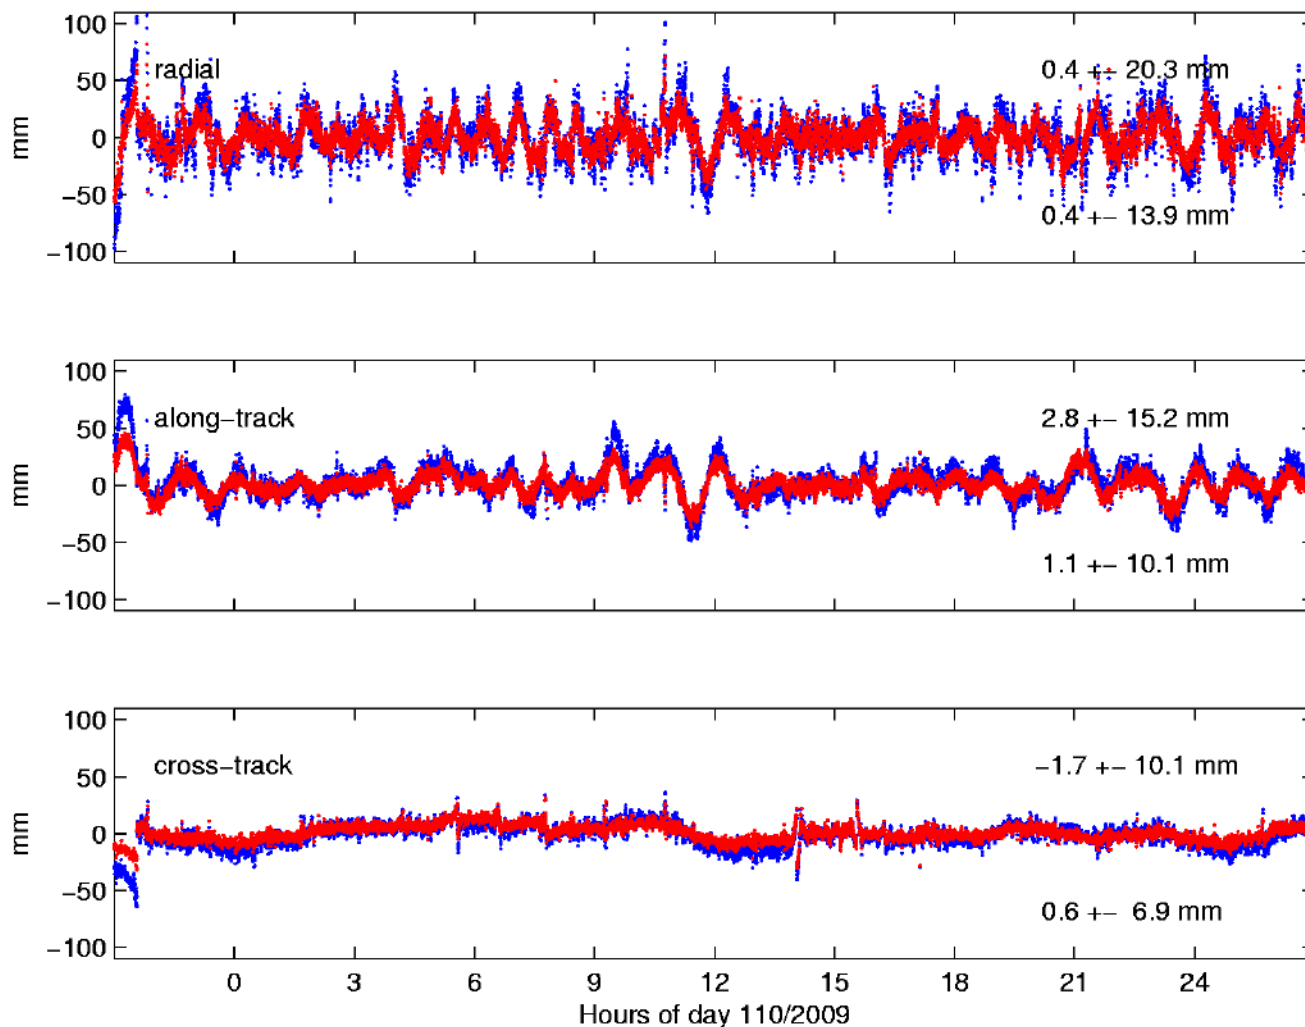


w/o PCV  
with PCV

# Orbit differences KIN-RD

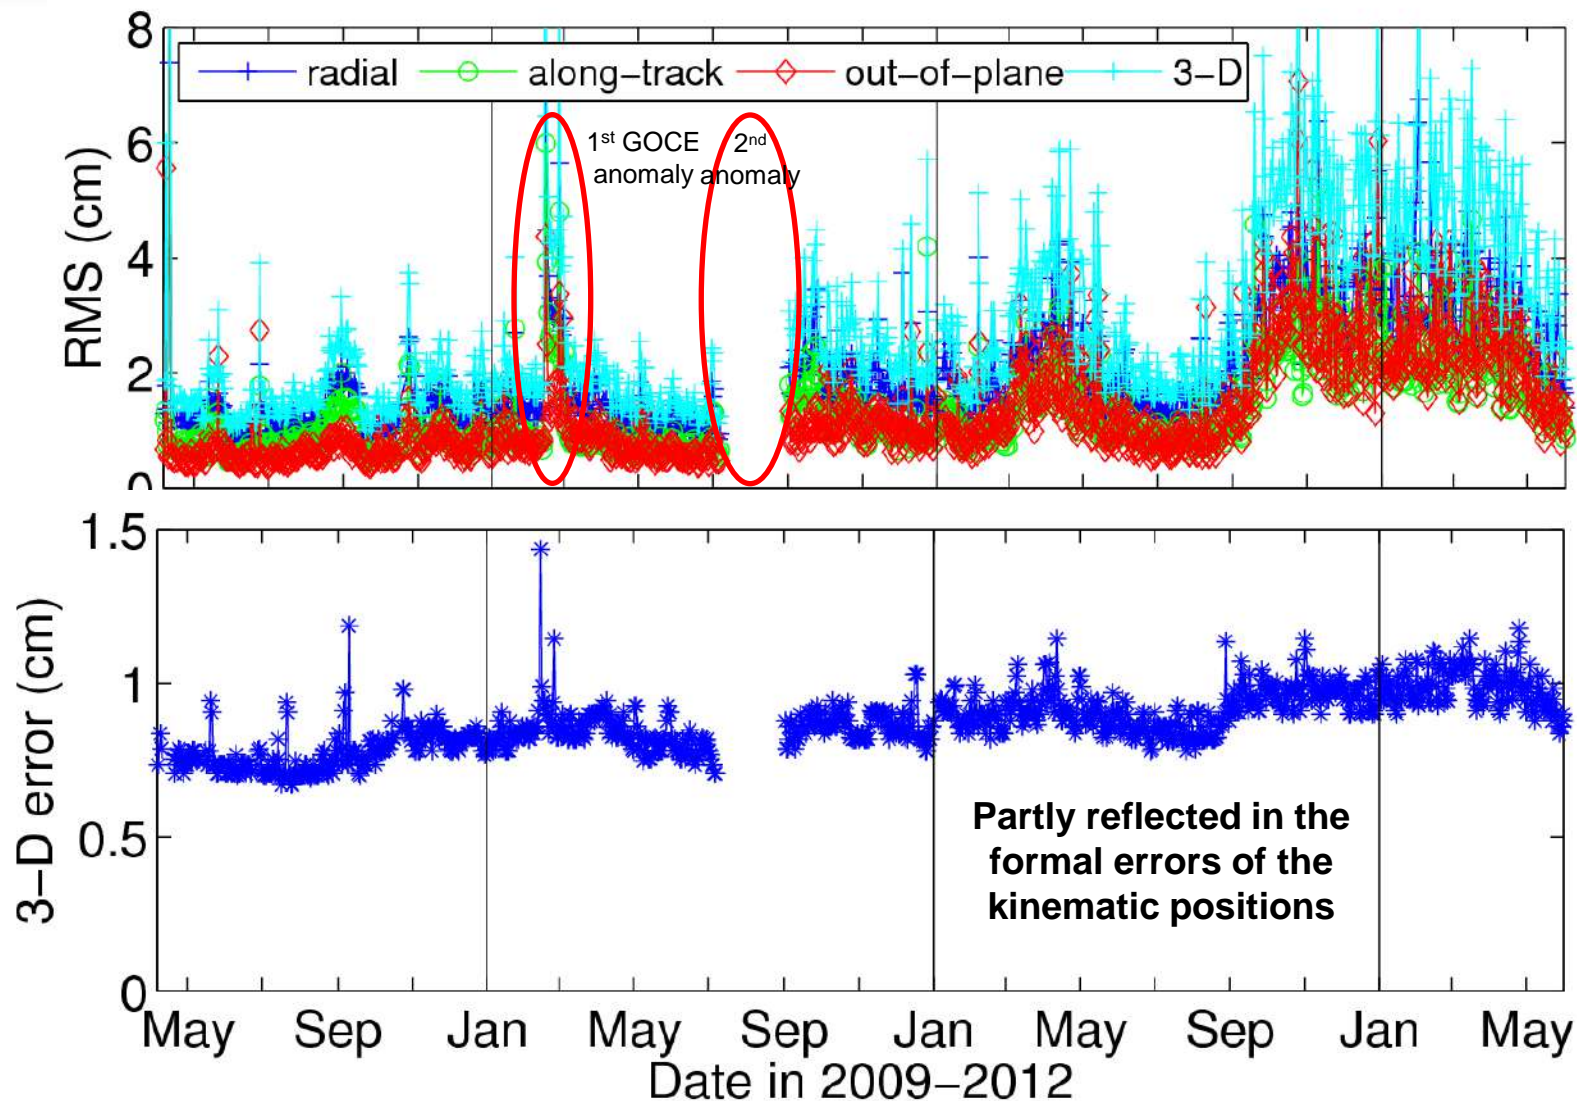



# Orbit differences KIN-RD

Ascending arcs (RMS)


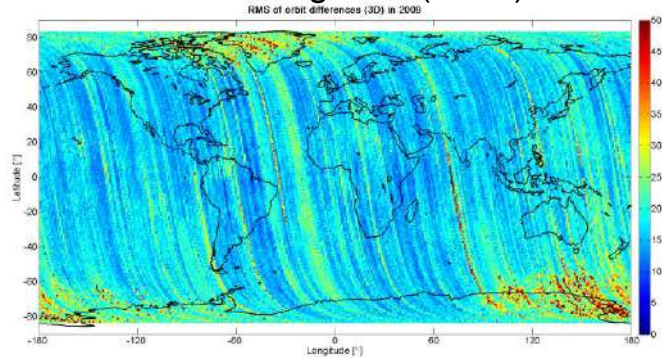


2009


Descending arcs (RMS)

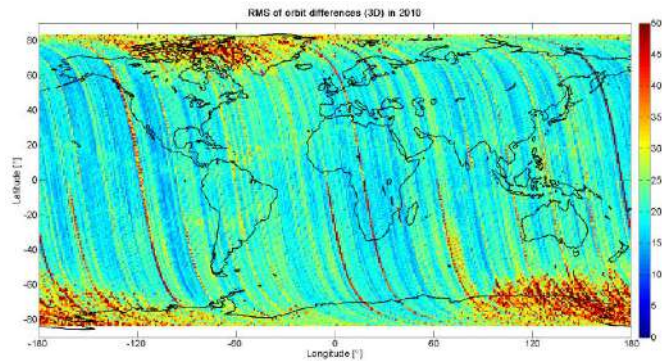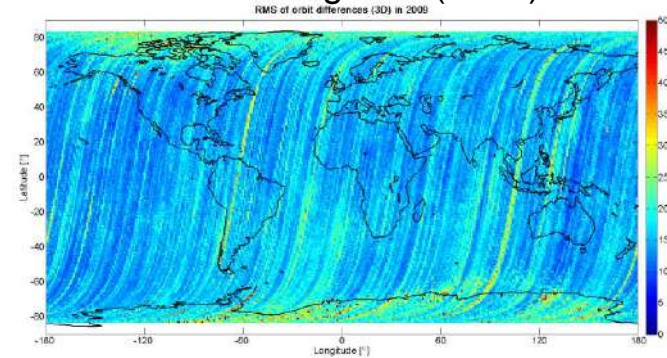


2010

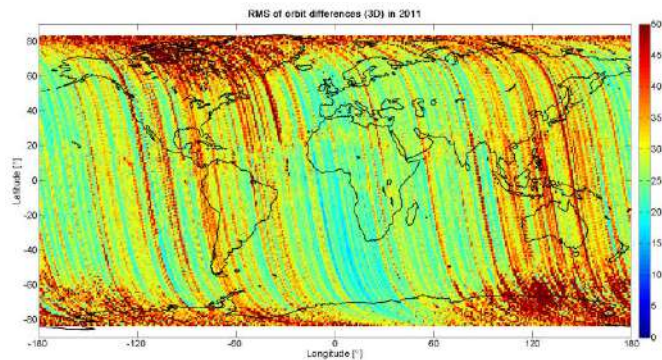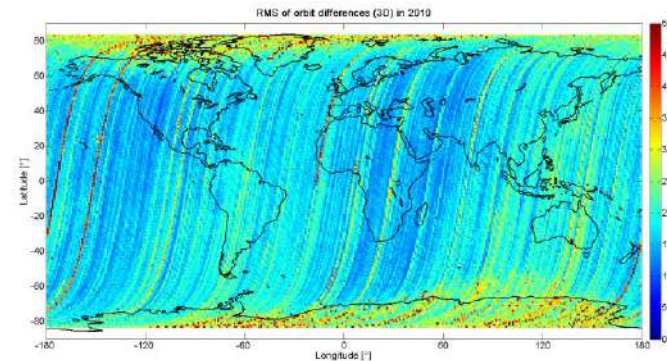

2011

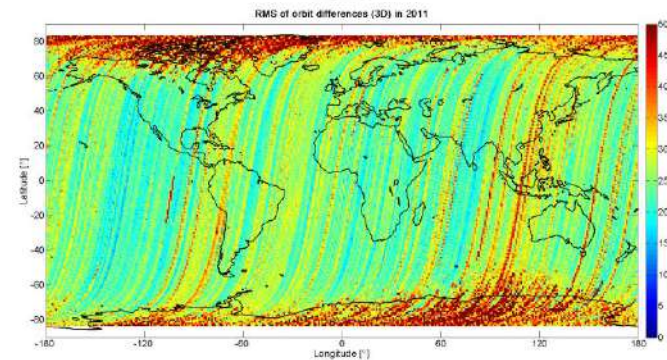


# Orbit validation with SLR

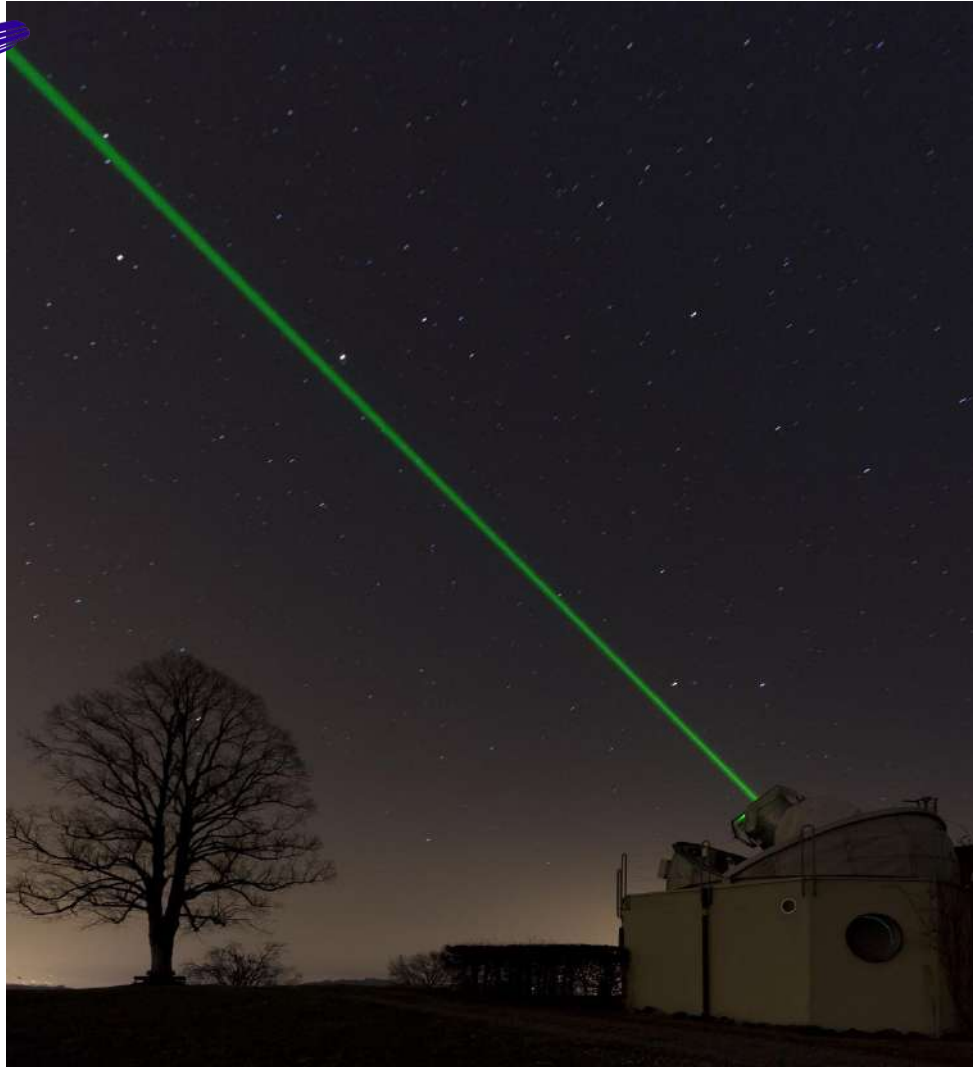


## Zimmerwald SLR station

- 100 Hz Nd:YAG System
- 58 ps pulse length, 8 mJ energy
- Very autonomous operations
- Most productive station of the ILRS on the northern hemisphere

Example of an observed Lageos pass

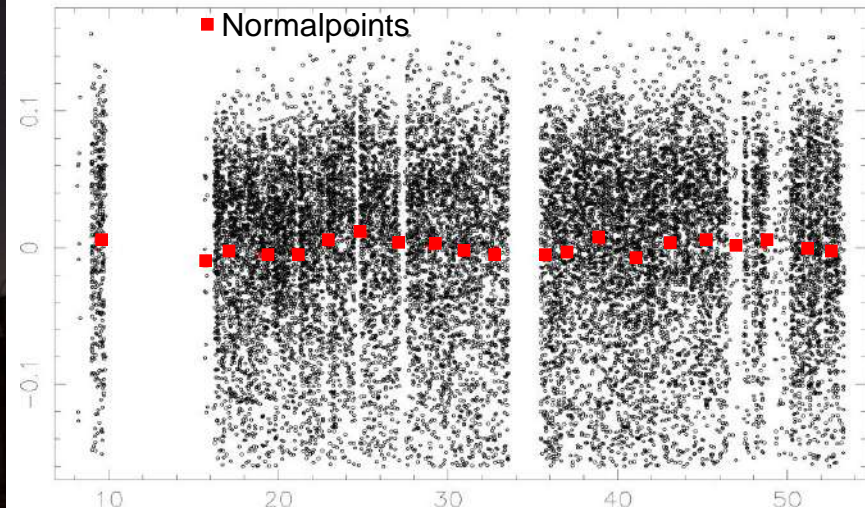


# Orbit validation with SLR

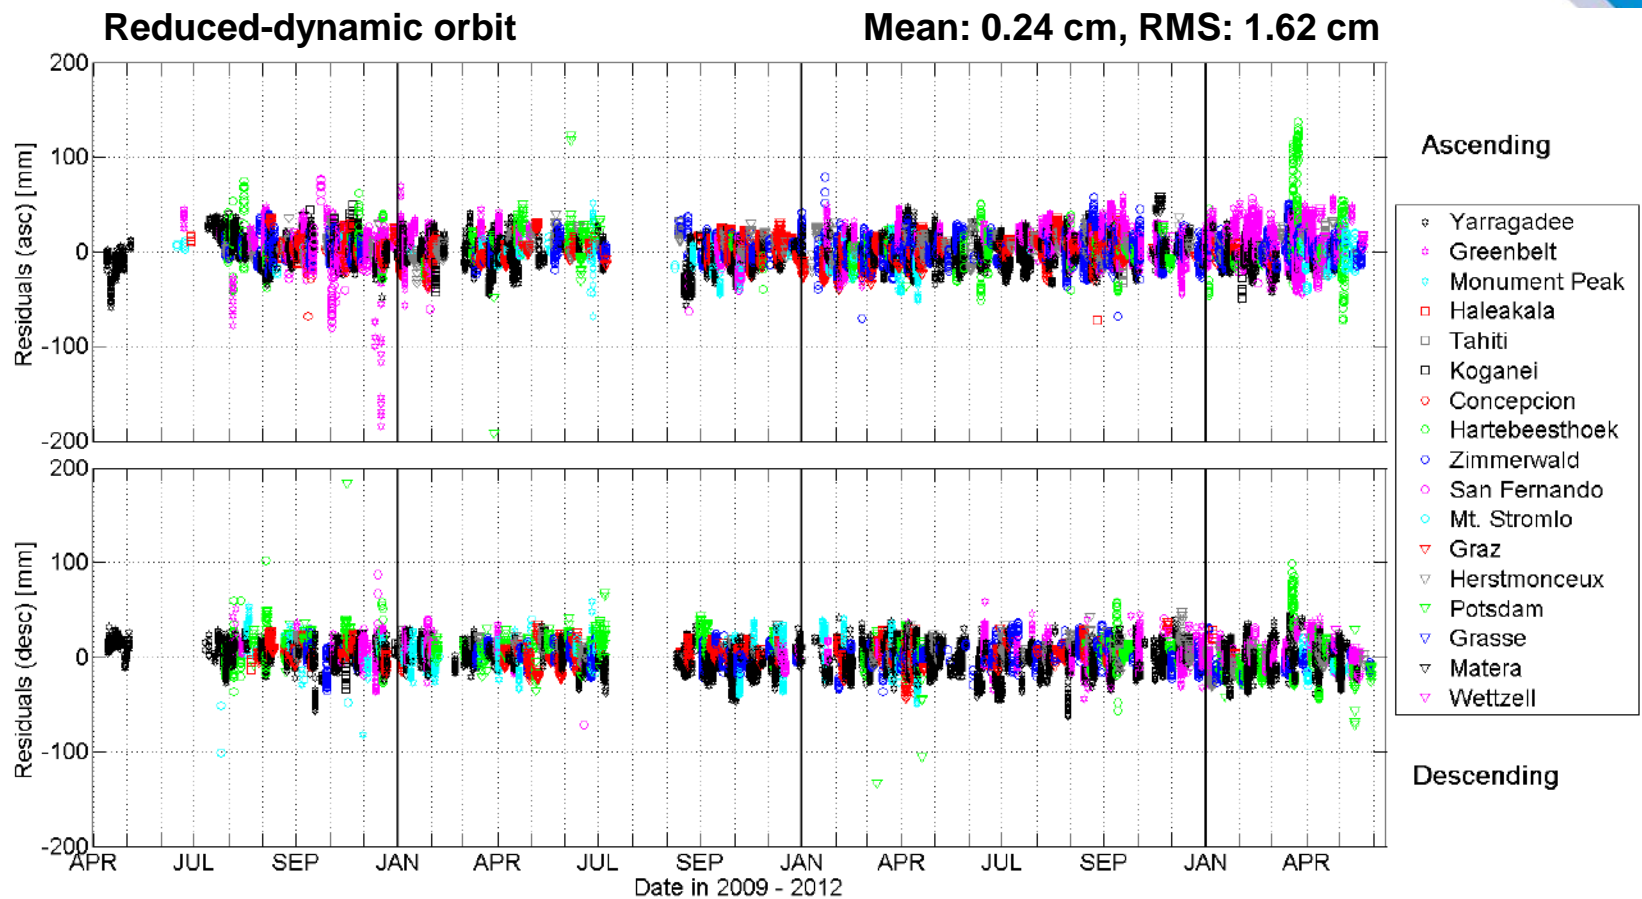

	2009:	2010:	2011:	2012:
<b>RMS:</b>	1.61 cm	1.44 cm	1.99 cm	2.05 cm
<b>Mean:</b>	0.46 cm	0.13 cm	0.25 cm	0.13 cm


# Orbit validation with SLR

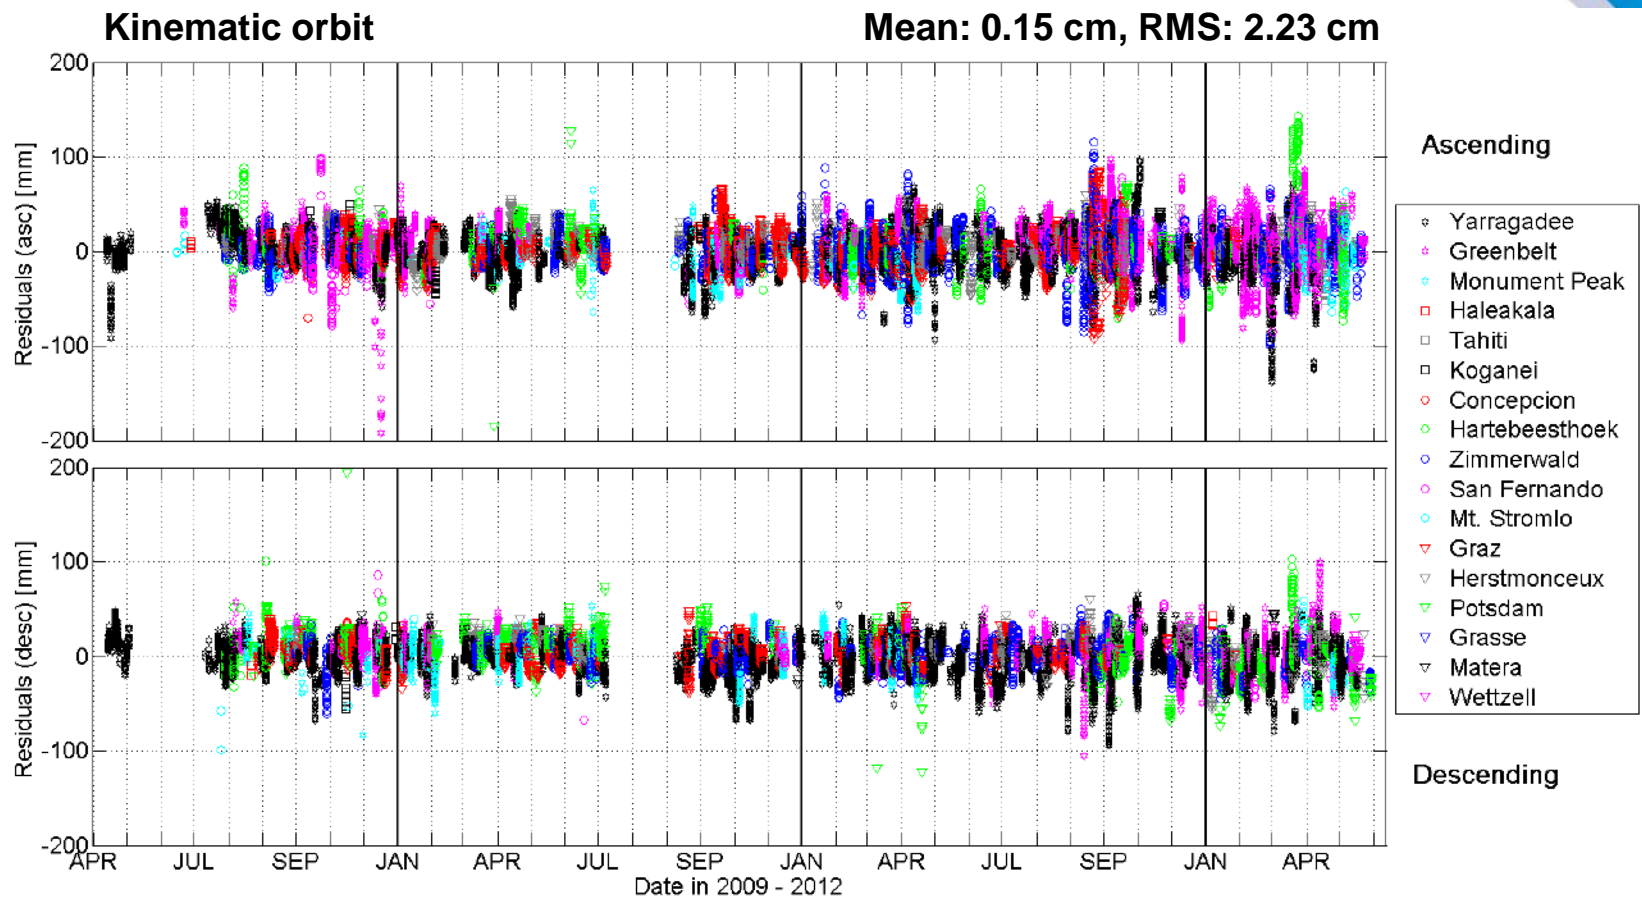

	2009:	2010:	2011:	2012:
<b>RMS:</b>	1.89 cm	1.76 cm	2.63 cm	3.00 cm
<b>Mean:</b>	0.49 cm	0.10 cm	0.15 cm	-0.24 cm

# Improved SLR data modeling


- use of SLRF2008 coordinate set
- application of azimuth- & nadir-dependent range corrections

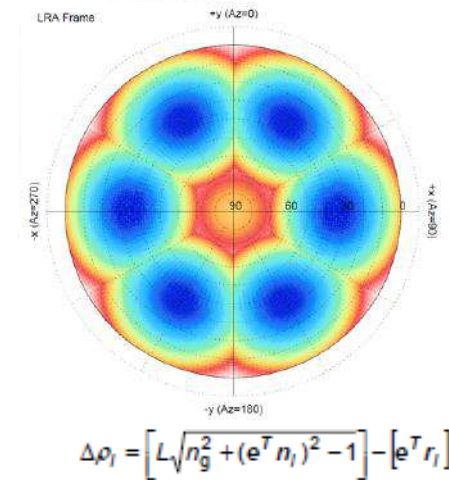

# Improved SLR data modeling

- use of SLRF2008 coordinate set
- application of azimuth- & nadir-dependent range corrections


(A): - SLRF2005      (B): - SLRF2008      (C): - SLRF2008  
 - no correction      - no correction      - with correction

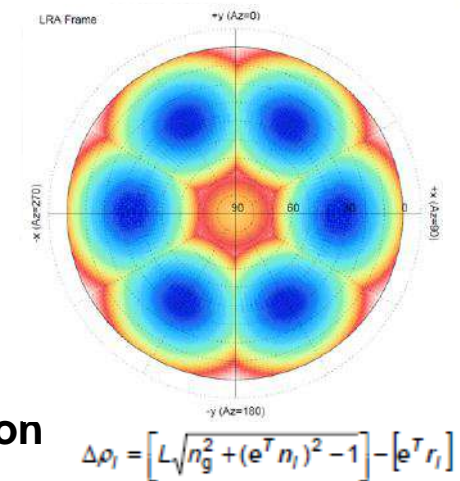

SLR validation (cm) of red.-dyn. solutions (DOYs 251,2010 – 226,2011):

	Mean	STD
(A)	0.37	1.62
(B)	0.52	1.45
(C)	0.01	1.44

# GOCE orbit parametrization

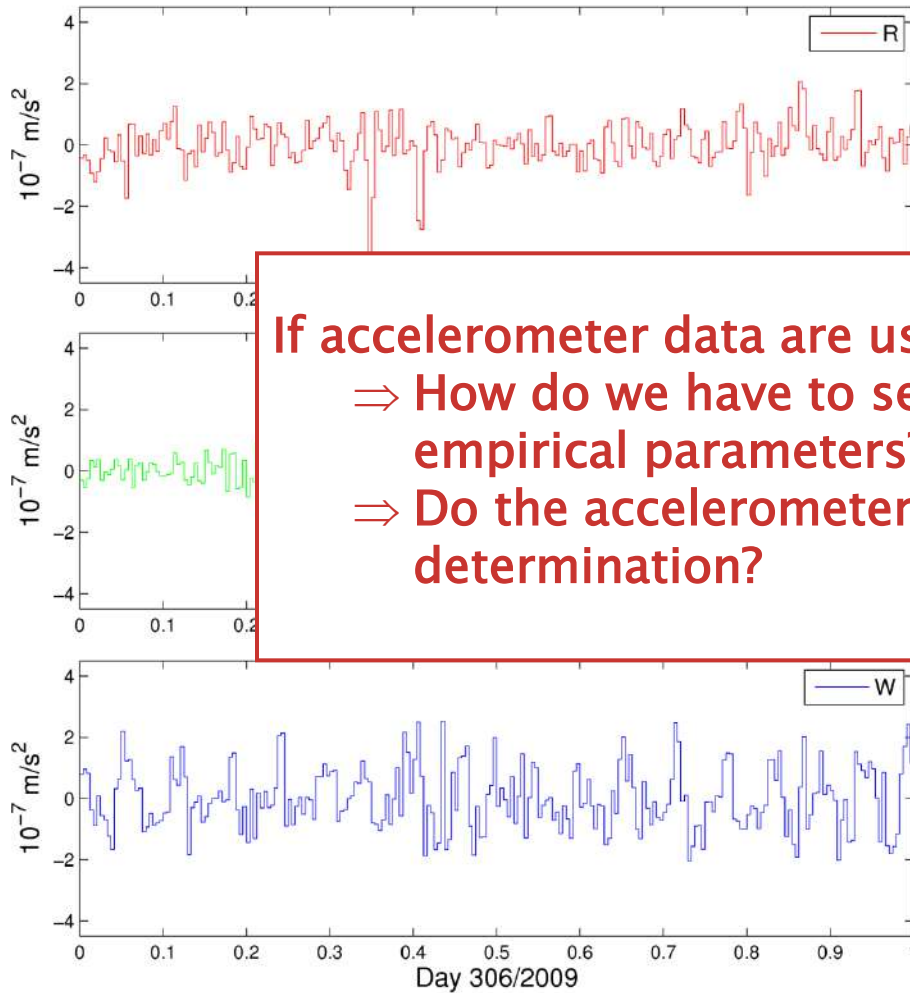

- Official **reduced-dynamic** solution is based on the following background models:

- Gravity field: EIGEN5C (120x120) (60x50)

al forces

If accelerometer data are used for orbit determination:

- ⇒ How do we have to select the constraints for the empirical parameters?
- ⇒ Do the accelerometer data improve the orbit determination?

- six initial orbital elements
- three constant accelerations in RSW
- piece-wise constant accelerations (6 min) in RSW, constrained with  $\sigma=2.0 \cdot 10^{-8} \text{ m/s}^2$

# GOCE accelerometers

**GRF:** Gradiometer reference frame

**X:** flight direction


**Z:** nadir direction

Common mode accelerations provide a measure of the non-gravitational forces acting on the satellite


**Common Mode:**

$$a_{c,k,l,i} = \frac{1}{2}(a_{k,i} + a_{l,i})$$

Schematic view of GOCE gradiometer

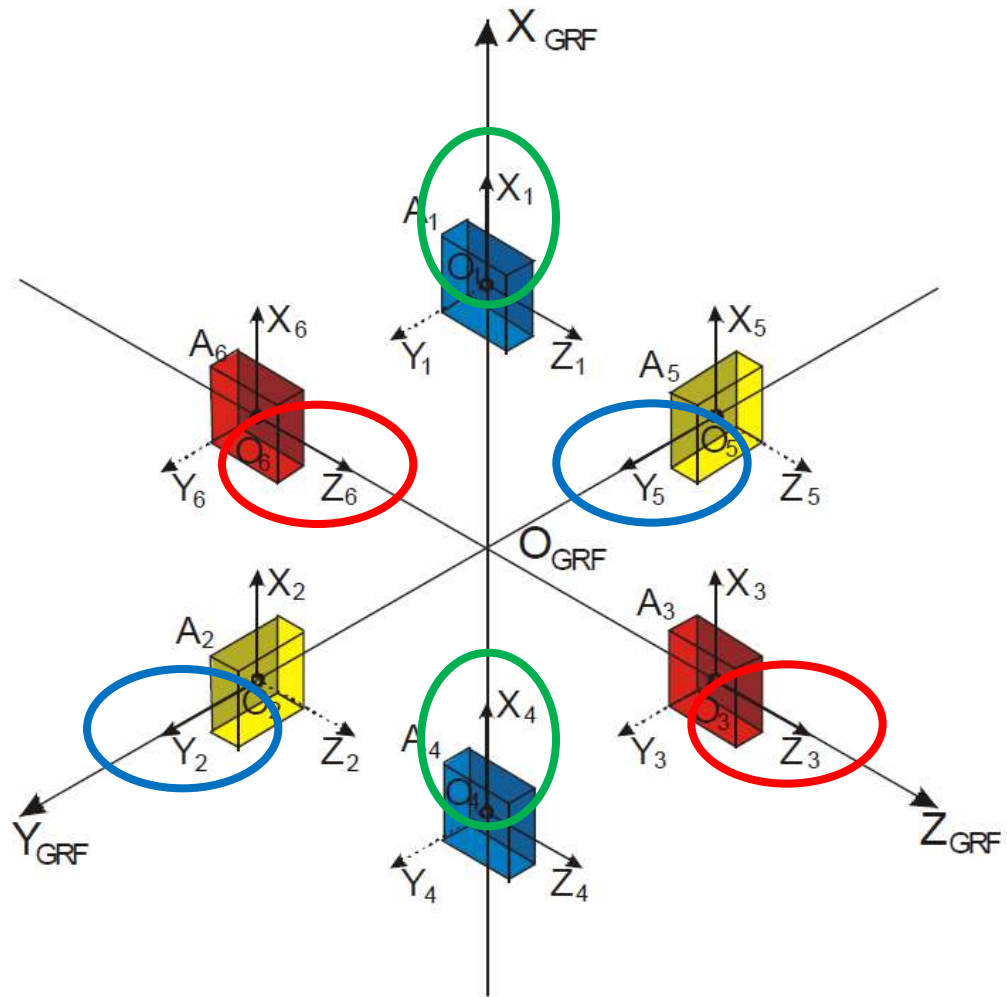


# Common-mode accelerometer data

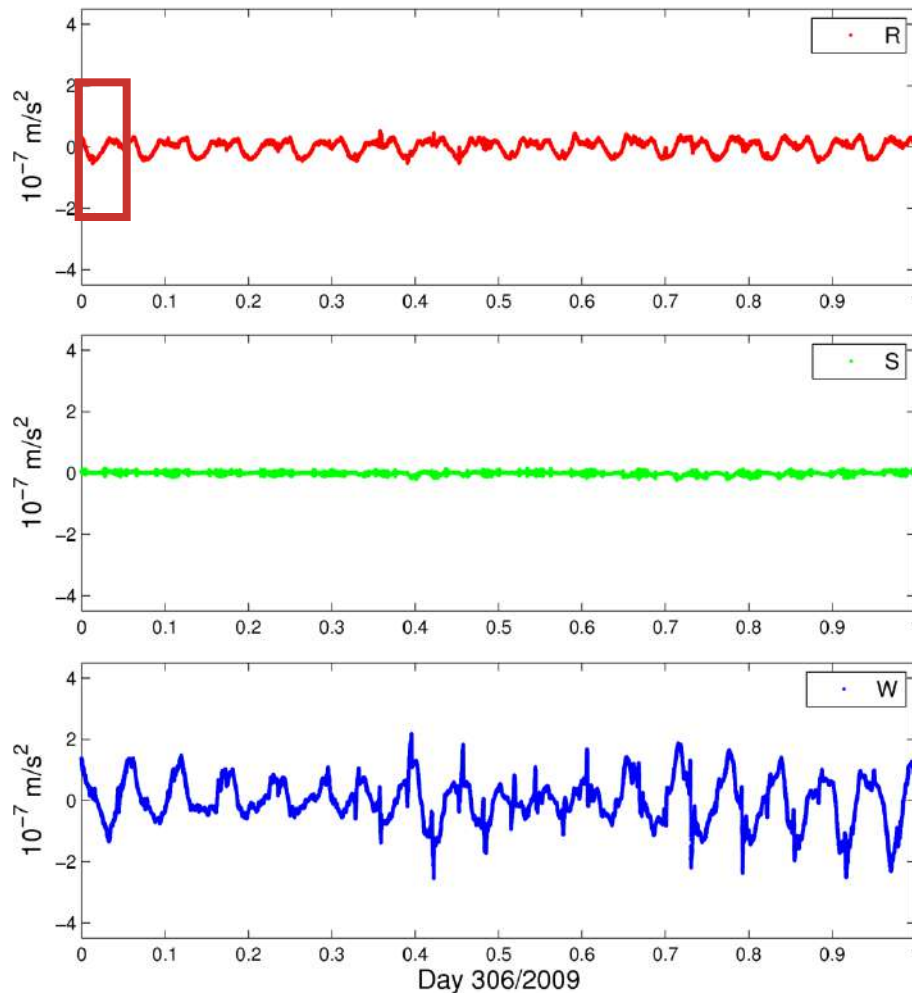


Meann offset removed, data transformed from XYZ into RSW directions

- **R** shows variations proportional to the thruster pulses (~3% cross-coupling)
- **S** is very small due to atmospheric drag compensation (drag-free flight)
- **W** shows largest variations due to the attitude motion (up to 5 degrees)
  - atmospheric drag acting on the satellite visible in W


# Common-mode accelerometer data

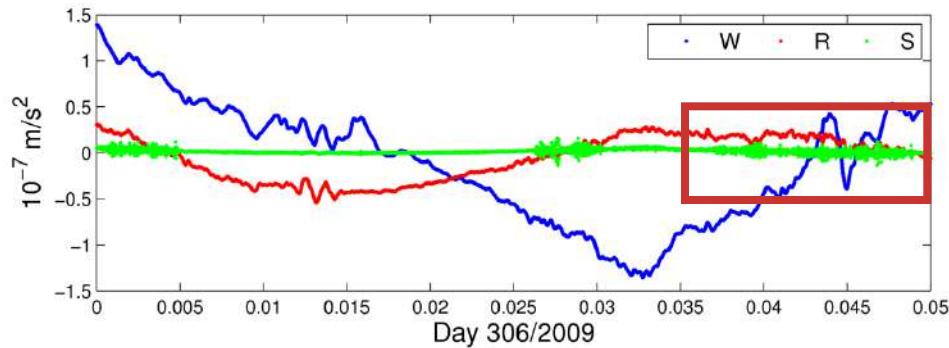

- Very clean data, no outliers

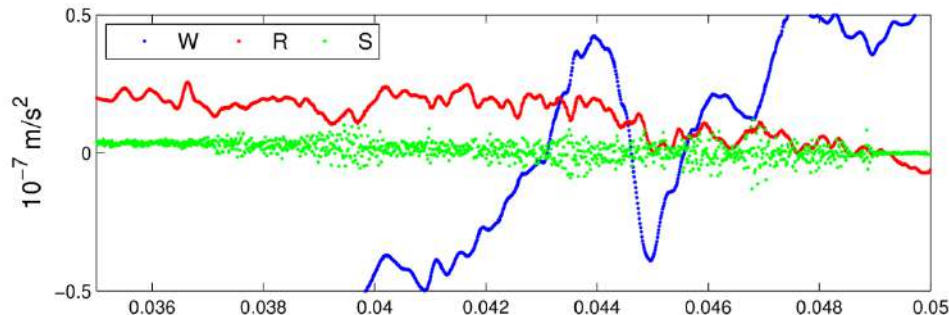


- Only S-component shows some noisy parts

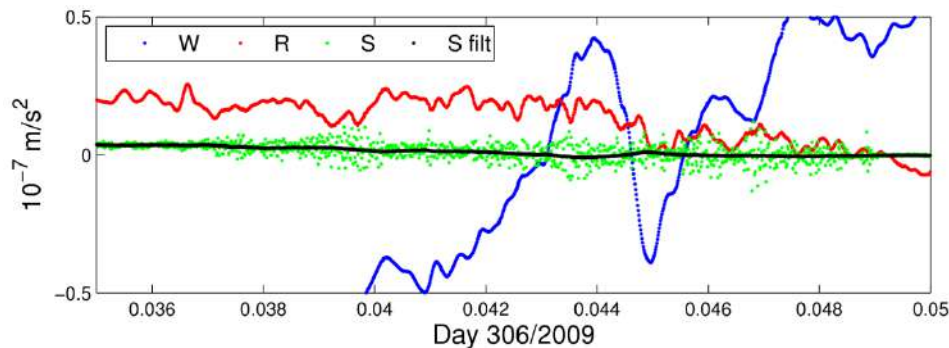

- S-component may be filtered

# Common-mode accelerometer data

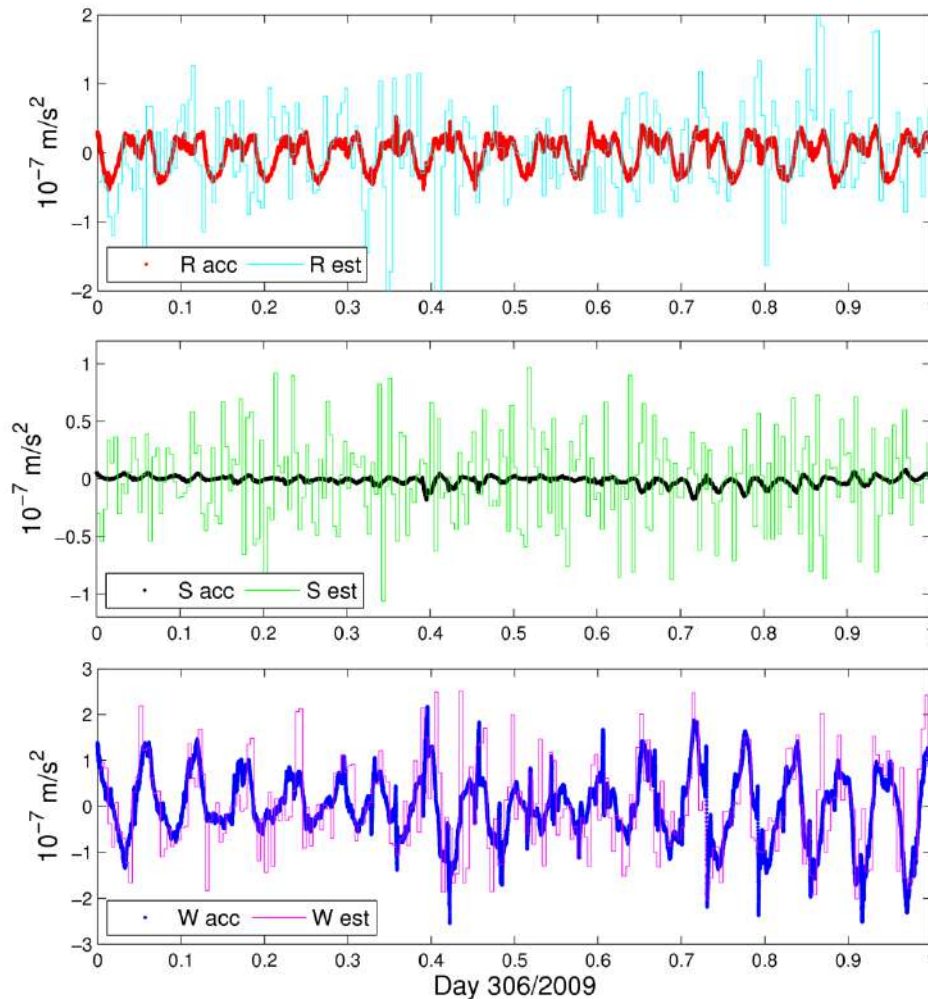

- Comparison of accelerometer data with estimated piece-wise constant accelerations shows
  - small correlation for R
  - no correlation for S
  - high correlation for W
- How do we have to select the constraints for the empirical parameters?
- Do the accelerometer data improve the orbit determination?

# Reference solution

- Data set: DOYs 306-364, 2009
- **Solution A0** => reference orbits: GOCE “official” reduced-dynamic orbit solution, 24h instead of 30h batches
  - EIGEN5S (120x120), FES2004 (50x50)
  - Six initial orbital elements
  - Three constant accelerations over 24h in RSW
  - Piece-wise (6-min) constant accelerations in RSW  $\sigma = 2.0 \cdot 10^{-8} \text{ m/s}^2$
- SLR validation: **Mean 0.35 cm, RMS 2.01 cm**

# Alternative solutions


Different models:

- **A:** EIGEN5S (120x120), FES2004 (50x50)  
w/o accelerometer data
- **B:** EIGEN5S (120x120), FES2004 (50x50) with acc
- **C:** GOCO03S (120x120), EOT08A (50x50) with acc
- **D:** GOCO03S (160x160), EOT08A (50x50) with acc

Different constraints:


- **0:**  $\sigma_R = \sigma_S = \sigma_W = 2.0 \cdot 10^{-8} \text{ m/s}^2$
- **1:**  $\sigma_R = \sigma_S = \sigma_W = 5.0 \cdot 10^{-9} \text{ m/s}^2$
- **2:** with acc  $\sigma_R = 2.0 \cdot 10^{-9} \text{ m/s}^2$  w/o acc:  $2.0 \cdot 10^{-8} \text{ m/s}^2$   
with acc  $\sigma_S = 4.0 \cdot 10^{-10} \text{ m/s}^2$  w/o acc:  $4.0 \cdot 10^{-9} \text{ m/s}^2$   
with acc  $\sigma_W = 7.0 \cdot 10^{-9} \text{ m/s}^2$  w/o acc:  $7.0 \cdot 10^{-8} \text{ m/s}^2$

# What are reasonable constraints?

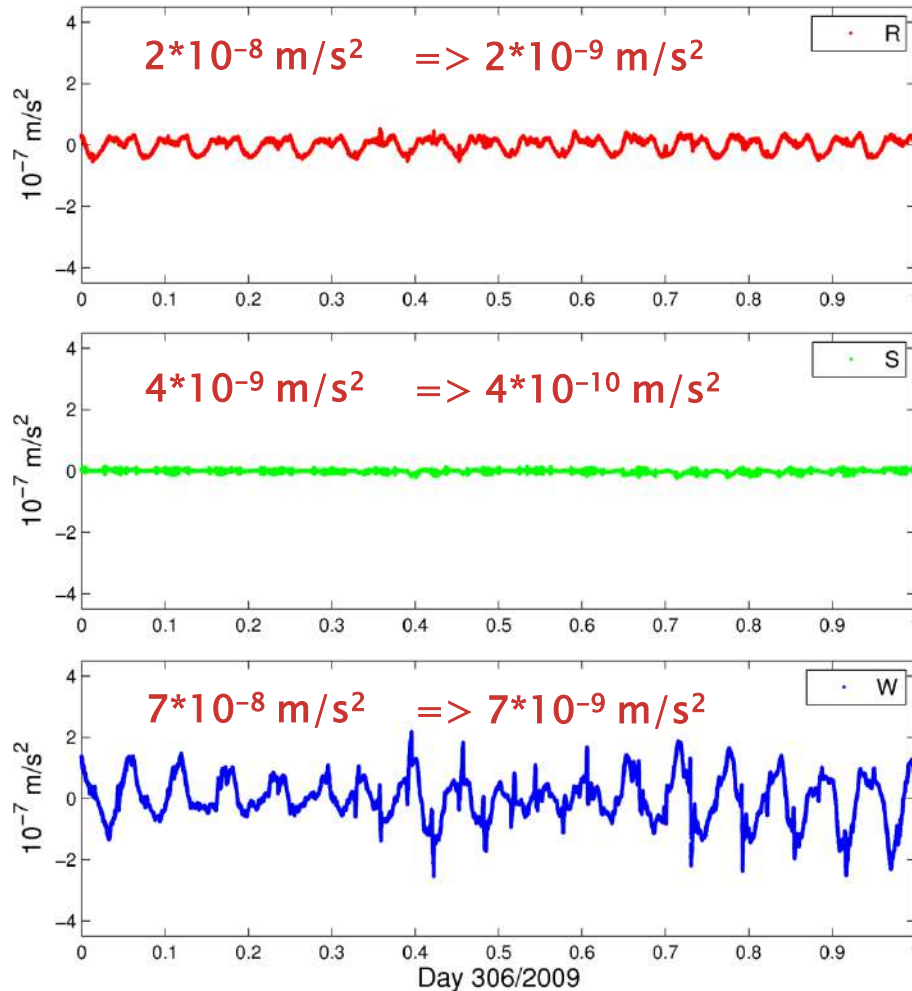

- The variations of the accelerations differ very much in **R, S, W**
- Use of different constraints for the three directions is thus reasonable
- Constraints, if **no** accelerometer data are used, are derived from:
  - Mean values for 6-min bins
  - RMS of these mean values  $\Rightarrow$  stable for the 57 days
- Constraints, if accelerometer data **are** used:
  - 10% - assuming that background models are sufficient


# Comparison of estimated accelerations

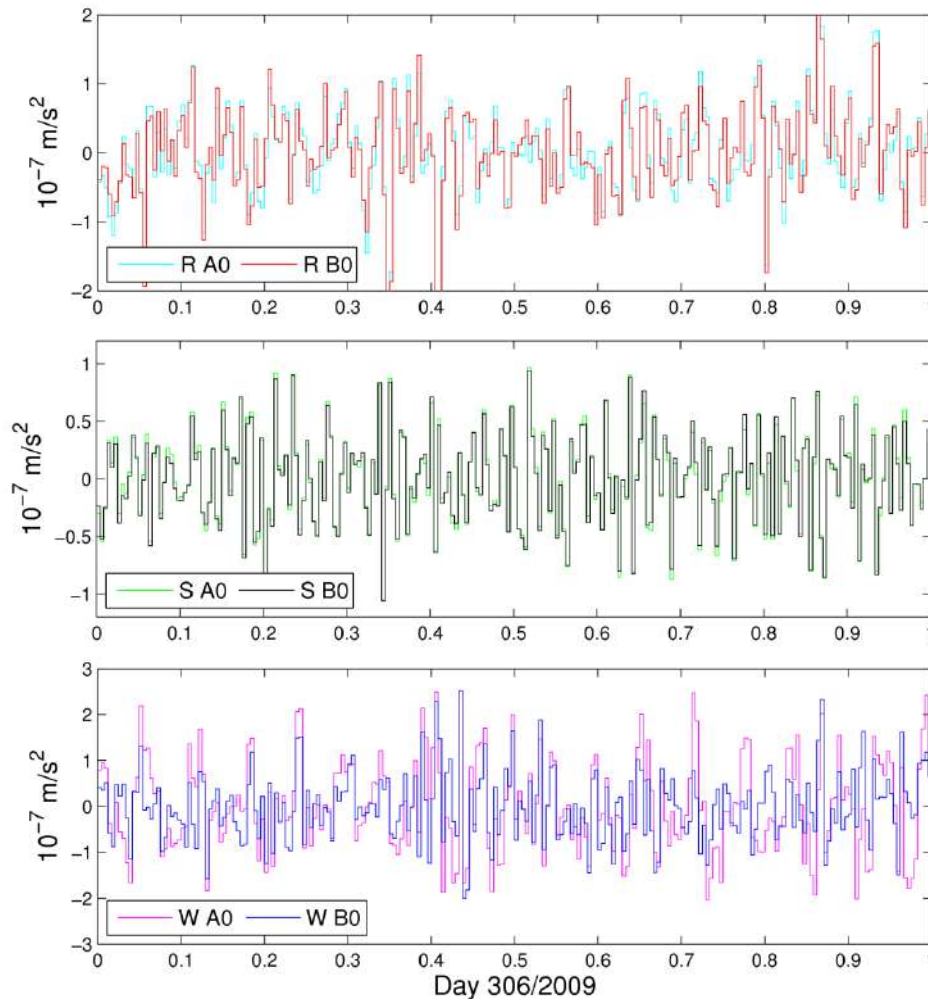

Note the different scaling of the plots

- **Comparison A0  $\Leftrightarrow$  B0**
    - Difference: use of accelerometer data for B0
  - **R, S:** no/small reduction of amplitude of empirical parameters
  - **W:** some reduction is visible
- =>** Use of accelerometer data with the same parametrization in R,S,W has only impact on estimated accelerations in W


# Comparison of estimated accelerations

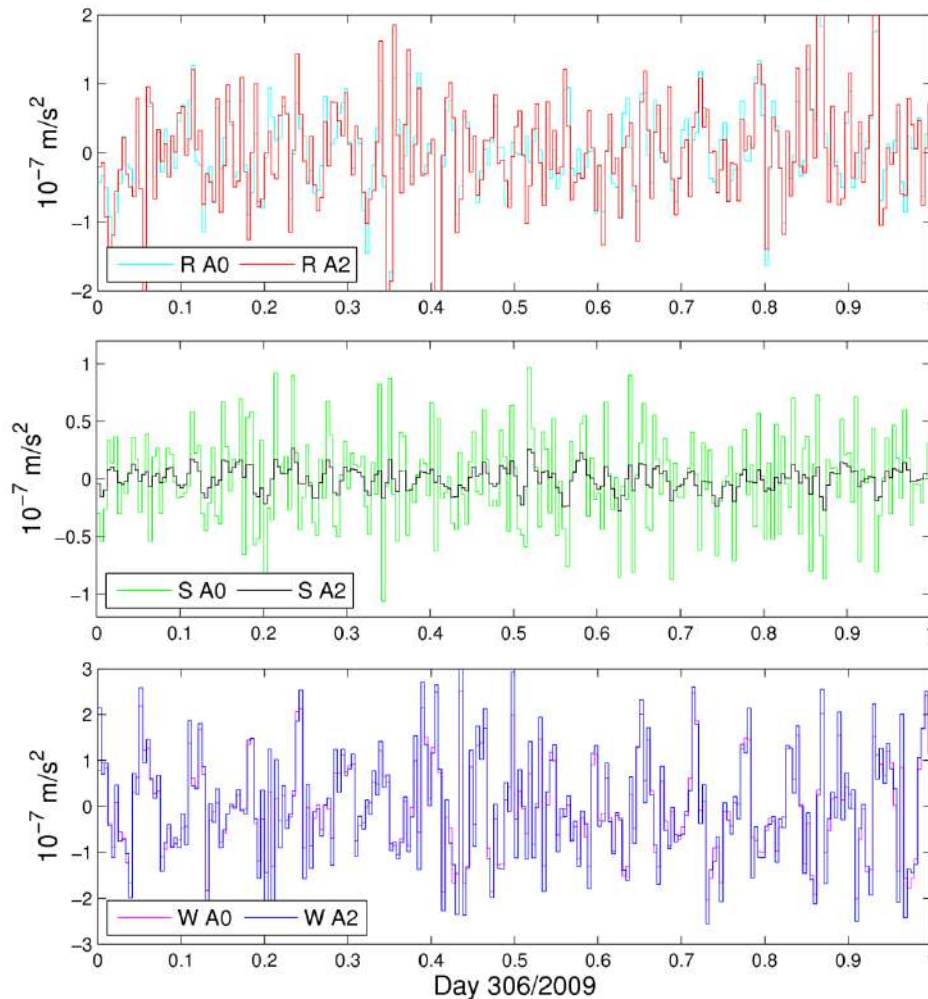

- **Comparison A0  $\Leftrightarrow$  A2**
  - Difference: realistic constraints for A2
- **R:** few differences
- **S:** high reduction of amplitude
- **W:** slight increase of amplitude

**=>** Use of realistic constraints has impact on the amplitude of the accelerations related to looser or tighter constraints

# Comparison of estimated accelerations

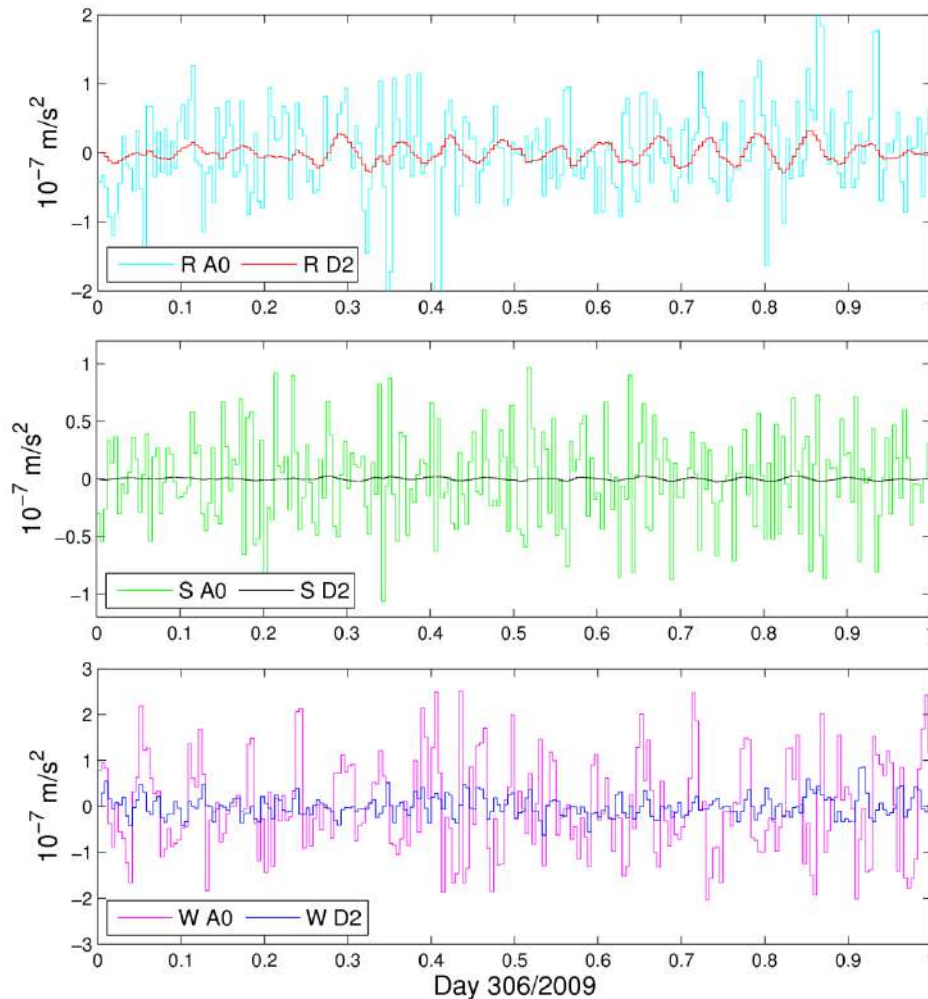


Note the different scaling of the plots

- **Comparison A0  $\Leftrightarrow$  D2**
  - Difference: use of accelerometer data + “best possible” background models + realistic constraints (10%)
- **High** reduction for all components

=> Use of accelerometer data + realistic constraints has impact on the amplitude of the accelerations related to tighter constraints

# Validation of orbit quality

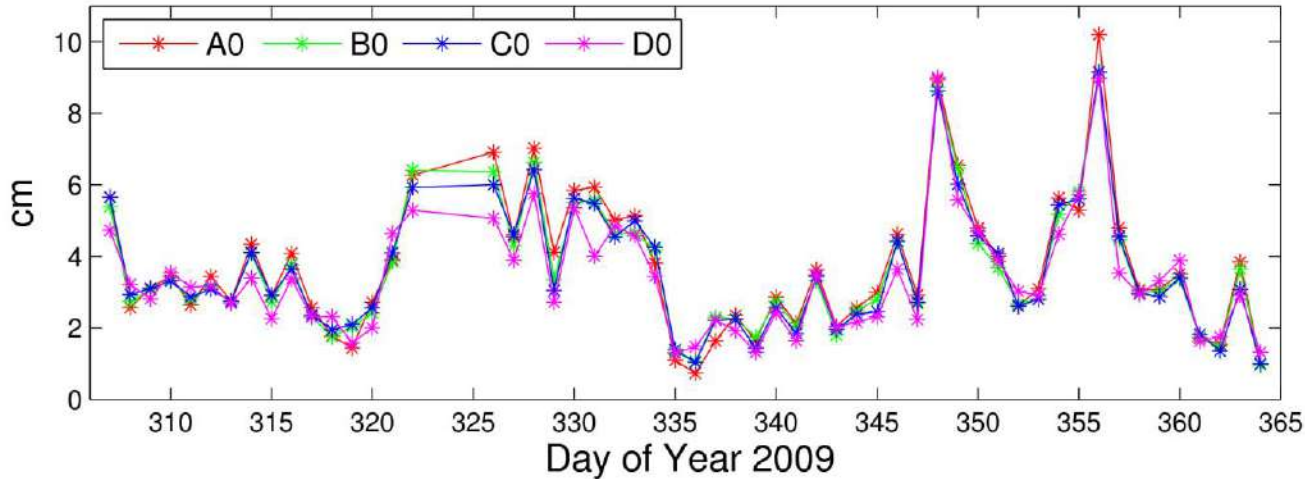

## SLR validation

Mean (cm) RMS (cm)

**0.35** **2.01**

**0.32** **1.99**


**0.33** **1.99**

**0.34** **1.98**

- 3D-position difference of orbits at midnight
- Differences compared to **A0**:
  - Use of accelerometer data, different background models (**C0**, **D0**)

=> No significant difference in the orbits

# Validation of orbit quality

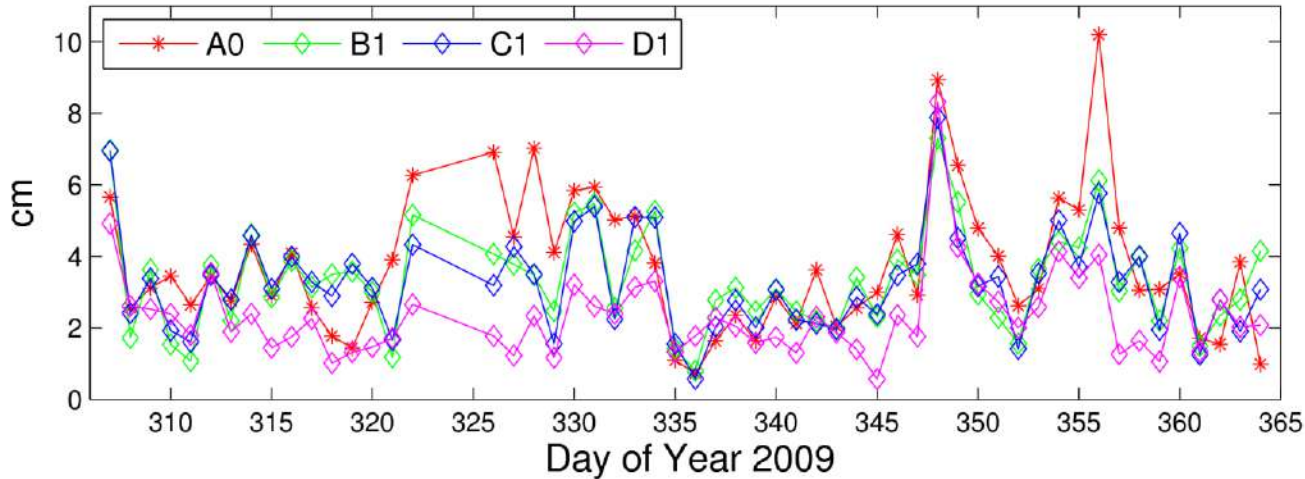

SLR validation

Mean (cm) RMS (cm)

**0.35** **2.01**


**0.23** **2.01**

**0.22** **1.98**

**0.28** **1.89**

- Differences compared to **A0**:
    - Use of accelerometer data, different background models (**C1**, **D1**), tighter constraint for all components
- => **Positive impact on orbit quality: The better the background models, the better the orbits.**

# Validation of orbit quality

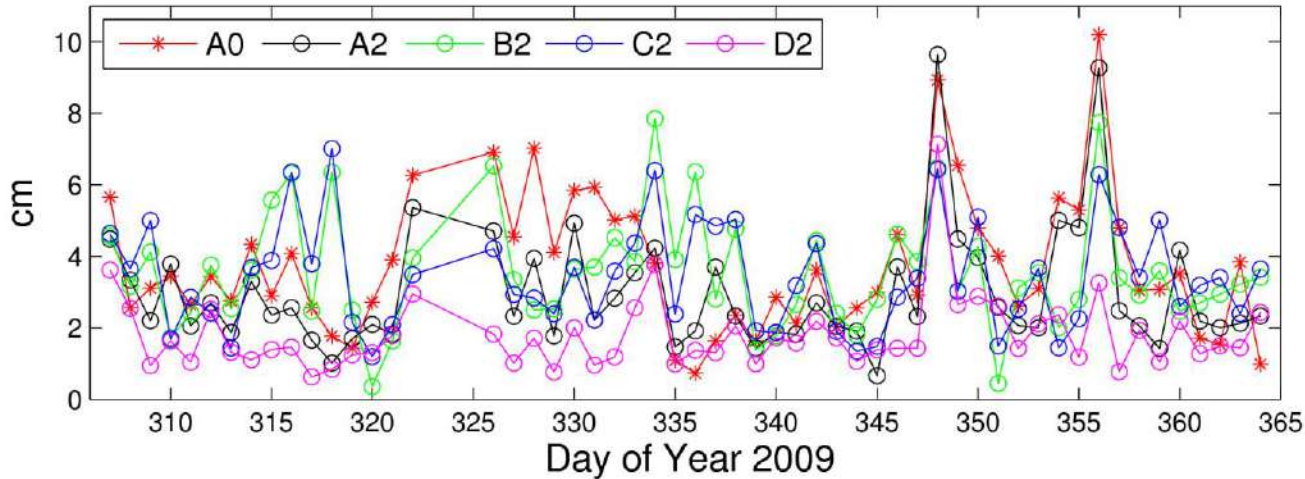

SLR validation

Mean (cm) RMS (cm)

0.35	2.01
0.31	1.90
0.17	2.02
0.18	1.96
0.22	1.79

- Differences compared to **A0**:
    - **A2**: realistic constraints
    - **B2,C2,D2**: use of accelerometer data, different background models (**C2**, **D2**), 10% of realistic constraints
- ⇒ **Positive impact on orbit quality: The better the background models, the better the orbits.**
- ⇒ **10% of constraints not sufficient for B2 and C2**

# Formation-flying satellites



# TanDEM-X mission

## Mission parameters


- Launch: June 2007 / June 2010
- Inclination:  $96.5^\circ$
- Altitude: 510 km
- Distance between the two satellites: 300 – 800 m




© DLR

## Mission goals

- global Digital Elevation Model (DEM) with a resolution of 12 m x 12 m
- vertical accuracy better than 10 m (relative accuracy better than 2 m)

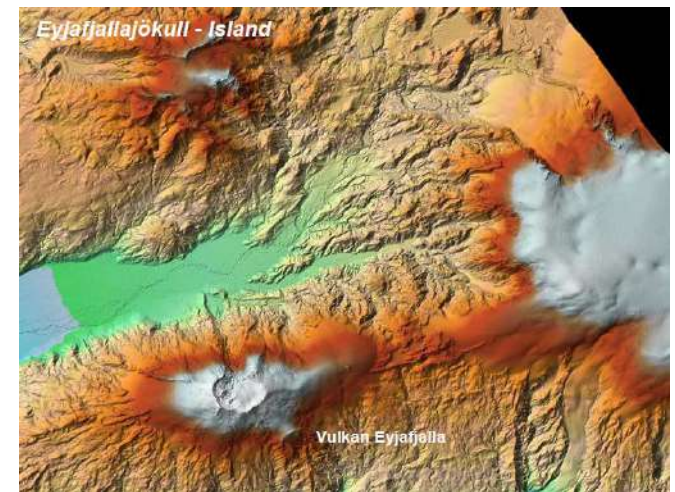

# TanDEM-X formation

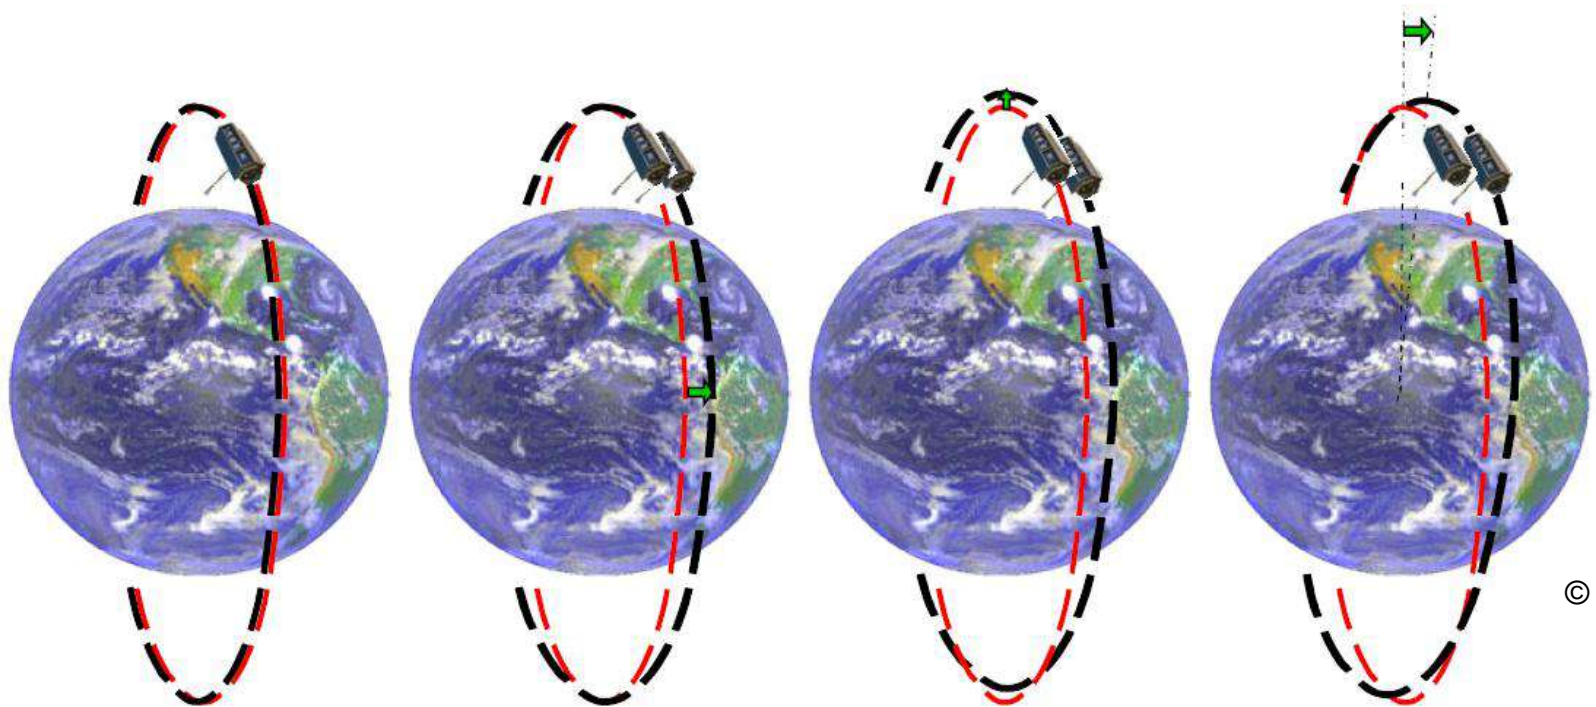

© DLR


Identical orbits and identical location.

Rotate orbital plane  
(i.e. R.A.A.N.)  
=> yields horizontal separation at equator crossings  
(but orbits cross at poles)


Change eccentricity  
=> causes different heights of perigee / apogee  
=> yields radial separation at poles  
(= safe formation)

Optionally rotate the argument of perigee  
=> yields larger baselines at high latitudes

# TanDEM-X formation

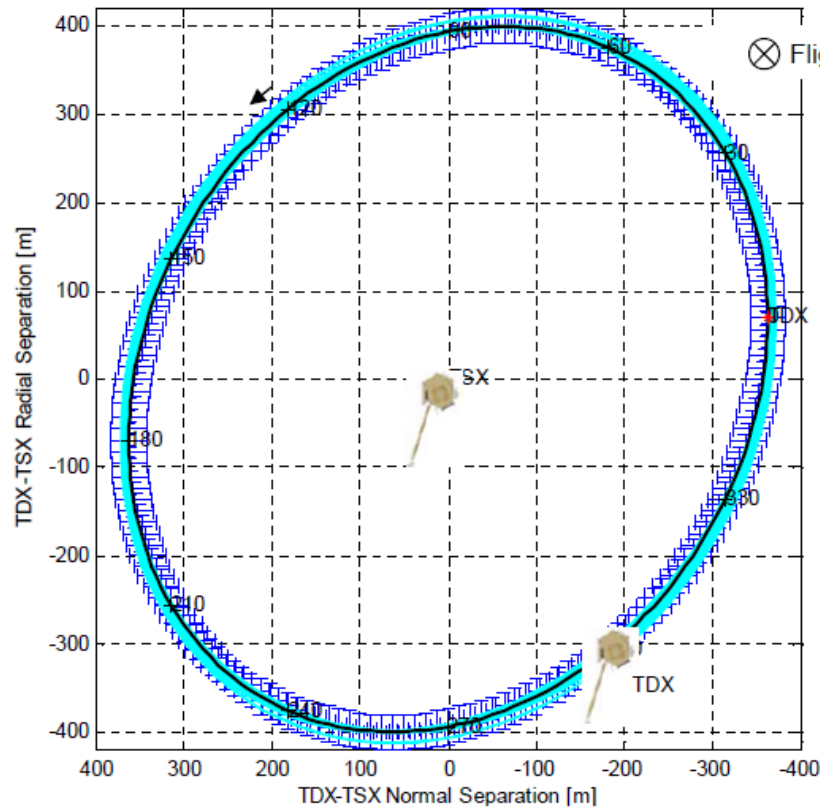

Formation is maintained by frequent maneuvers

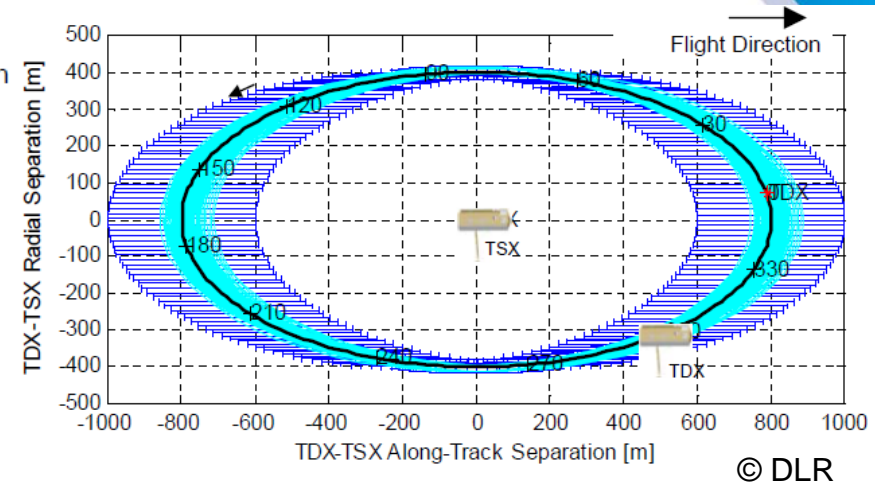

Example of two TDX maneuvers,  $0.5 \cdot U$  separated

MAN_START	2011/01/02 23:16:35.4	% GPS Time
MAN_DURATION	96.000	% [sec]
MAN_DV_RAD	-0.000084	% [m/s]
MAN_DV_TANG	-0.005224	% [m/s]
MAN_DV_NORM	0.000366	% [m/s]


MAN_START	2011/01/03 00:04:00.3	% GPS Time
MAN_DURATION	97.165	% [sec]
MAN_DV_RAD	-0.000018	% [m/s]
MAN_DV_TANG	0.005258	% [m/s]
MAN_DV_NORM	0.000366	% [m/s]

# TanDEM-X formation control

## Formation Control Concept

- TSX is controlled w.r.t. TSX reference orbit
    - In-plane maneuvers: 1..5 cm/s every 20..2 days
    - Inclination maneuvers: up to 30 cm/s, 3-4 per year
  - TDX **simultaneously** executes **same** hydrazine **maneuvers** as TSX (otherwise the formation breaks up)
- } *absolute orbit control*
- TDX performs additional cold-gas and hydrazine maneuvers
    - **to maintain TDX-TSX relative motion (daily)**
    - to reconfigure the formation (according to DEM acquisition plan)
- } *relative orbit control*

# Baseline determination

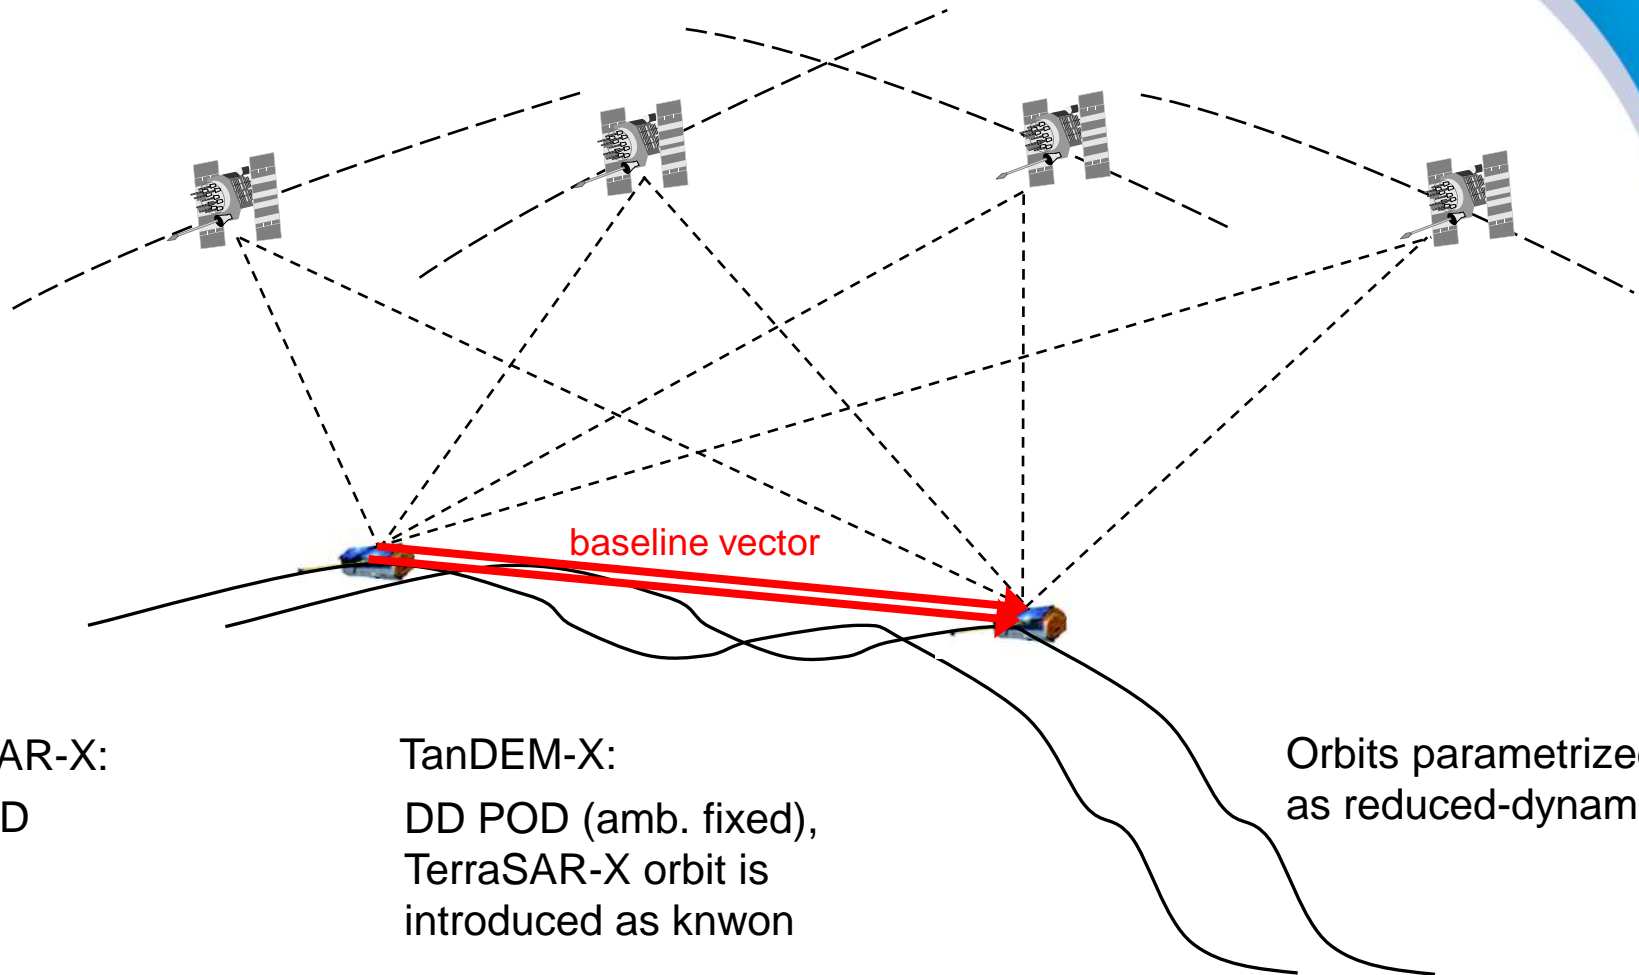

TerraSAR-X:  
ZD POD

TanDEM-X:  
DD POD (amb. fixed),  
TerraSAR-X orbit is  
introduced as known

Orbits parametrized  
as reduced-dynamic



# Experience from GRACE

## K-Band validation


- independent validation with K-band data (only line-of-sight direction, nicht absolute)
- millimeter precision confirmed (1.10 mm)
- PCV modeling important (0.81 mm)

## Comparison with DLR baselines

- scatter (STD) in the millimeter range (0.80, 1.04 und 1.54 mm)
- biases (mean) not (?) very large (0.95, -0.85 und 2.04 mm)
- cross-track direction is critical

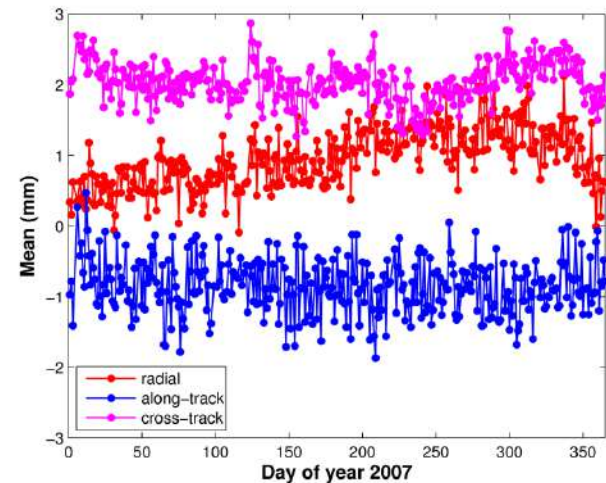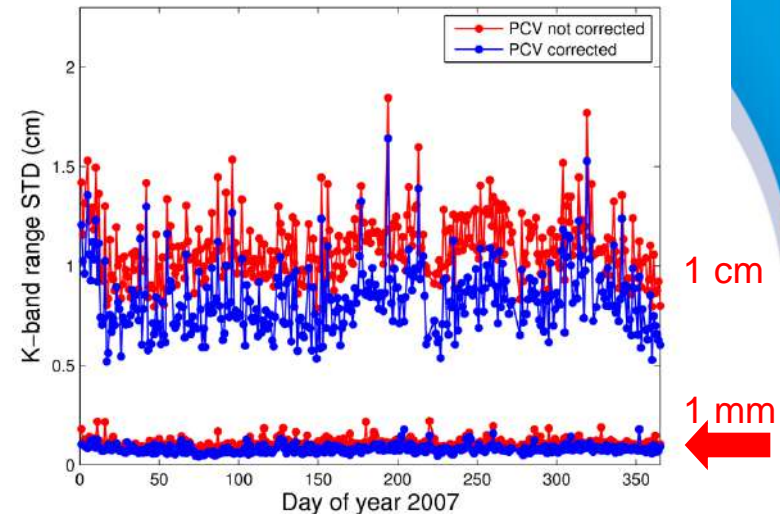

# TanDEM-X inter-agency comparison

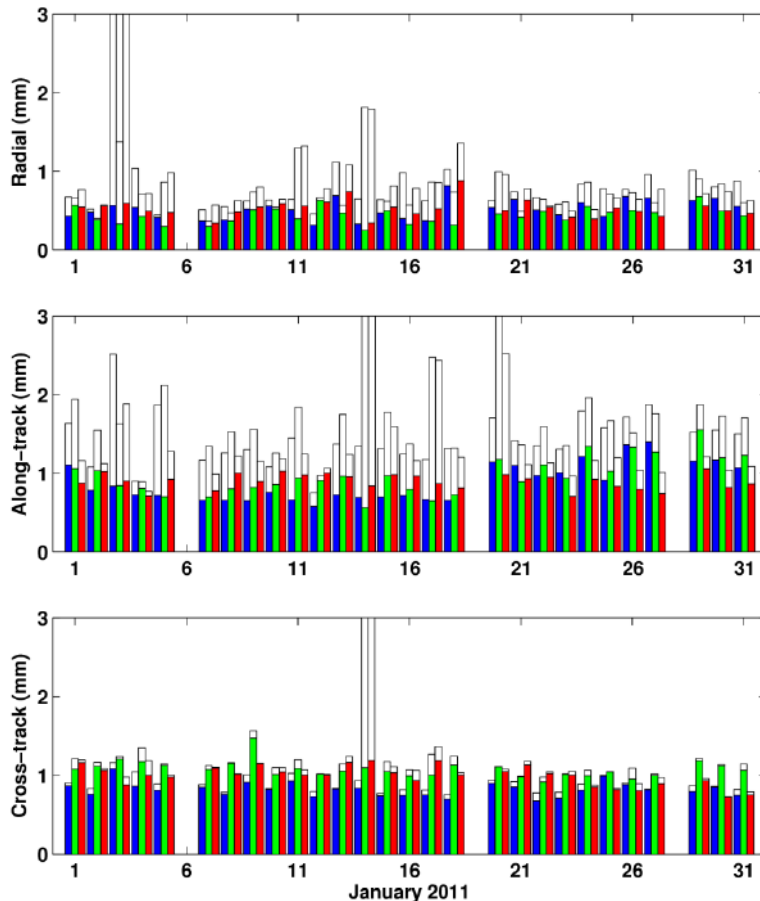

Dual-frequency solutions:



Deutsches Zentrum  
für Luft- und Raumfahrt e.V.  
in der Helmholtz-Gemeinschaft

**AIUB**

Std (mm)	radial	along-track	cross-track
<b>GFZ - DLR</b>	<b>0.5 (0.7)</b>	<b>0.8 (1.4)</b>	<b>0.8 (0.9)</b>
<b>GFZ - AIUB</b>	<b>0.4 (0.7)</b>	<b>0.9 (1.7)</b>	<b>1.0 (1.1)</b>
<b>AIUB - DLR</b>	<b>0.5 (0.8)</b>	<b>0.9 (1.2)</b>	<b>1.0 (1.1)</b>

Mean (mm)	radial	along-track	cross-track
<b>GFZ - DLR</b>	<b>-0.2</b>	<b>-0.4</b>	<b>-0.4</b>
<b>GFZ - AIUB</b>	<b>-0.1</b>	<b>-1.2</b>	<b>-1.1</b>
<b>AIUB - DLR</b>	<b>-0.1</b>	<b>0.7</b>	<b>0.7</b>


Statistics for one month (median in mm)

**=> Mission requirements are 1 mm (1D RMS)**

# Dual-frequency vs. single-frequency

Median values (in mm) of daily STD's for one month of reduced-dynamic baseline differences between AIUB und DLR for different observables:


Comparison	Radial	Along-track	Out-of-plane
L1(C) & L2(P)	0.5	0.9	1.0
L1(P) & L2(P)	0.5	0.9	0.9
L1(C)	0.3	0.4	0.8

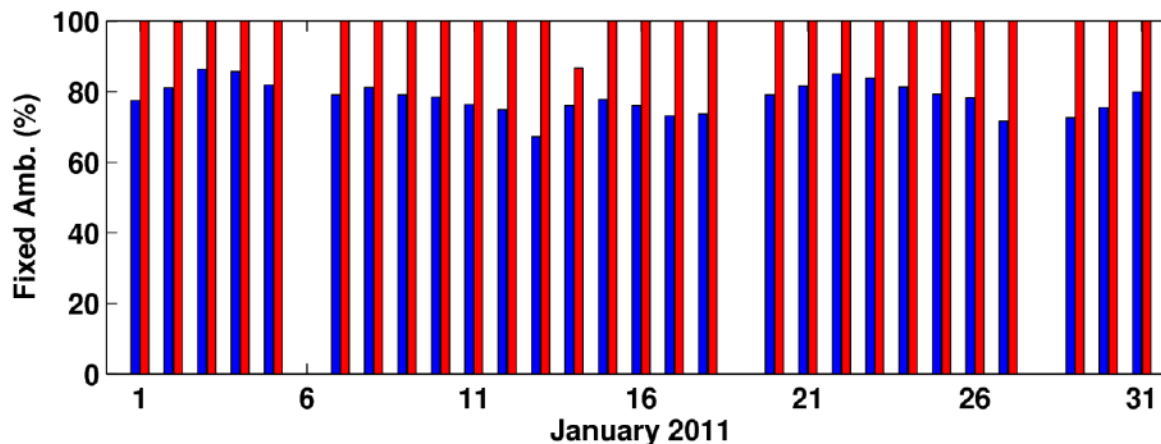


78% of the **wide-lane** ambiguities fixed (L1(C) & L2(P))

100% of the **L1** ambiguities fixed (L1(C))

# Differential single-frequency PCVs

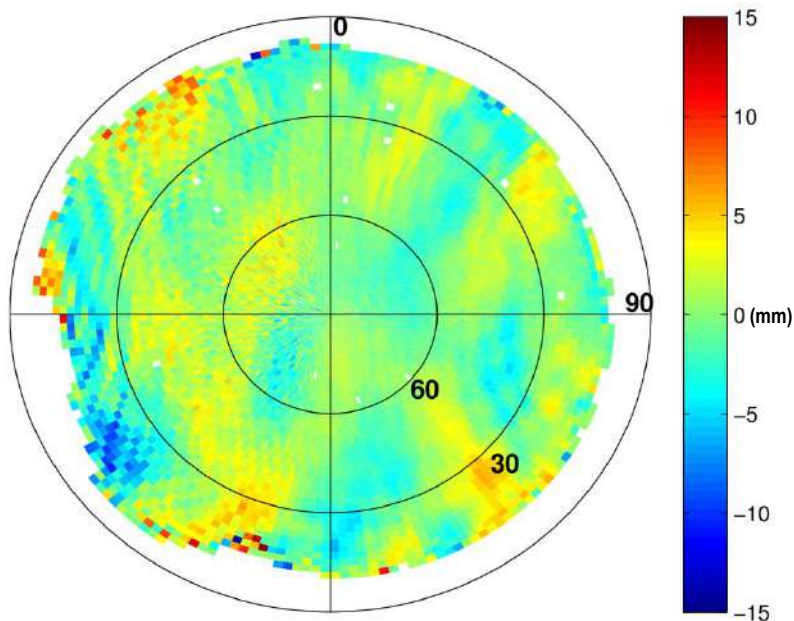


L1(C)

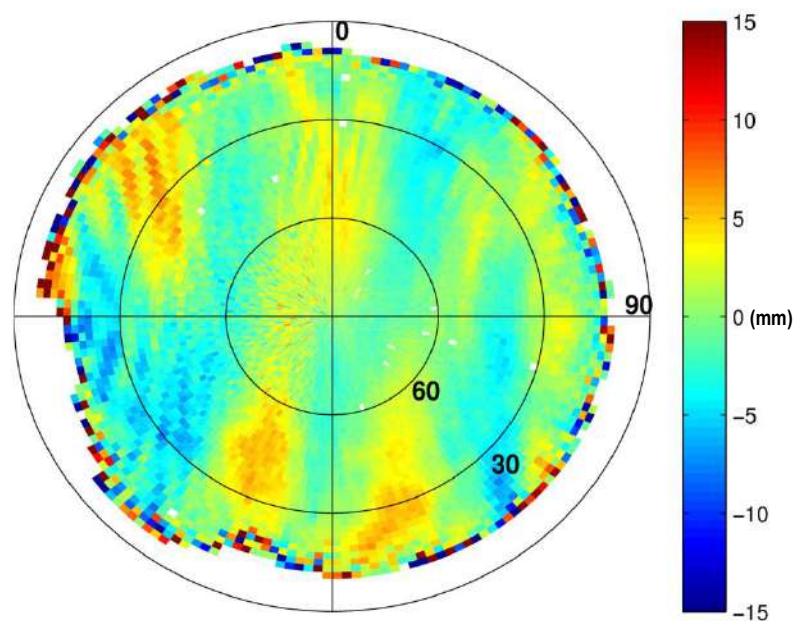

L2(P)

For single-frequency baseline determination **differential PCVs** are needed, because single-satellite solutions (and thus single-satellite PCVs) cannot be easily generated with the required accuracy

# TanDEM-X inter-agency comparisons

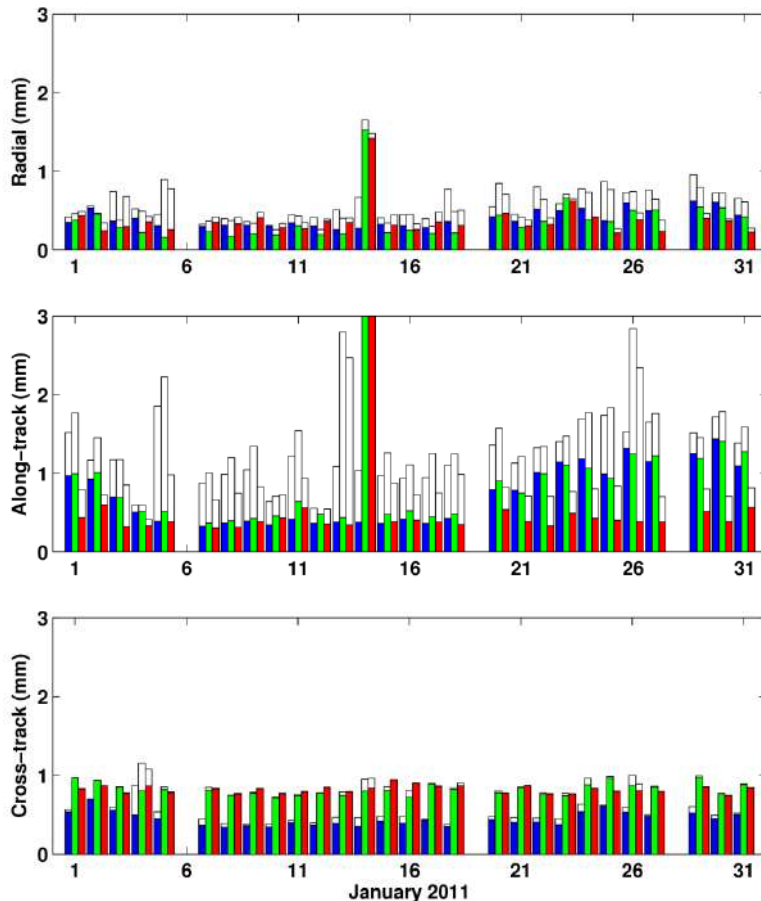

STD per day (in mm)

Single-frequency solutions:



Deutsches Zentrum  
für Luft- und Raumfahrt e.V.  
in der Helmholtz-Gemeinschaft


**AIUB**

Std (mm)	radial	along-track	cross-track
<b>GFZ - DLR</b>	<b>0.4 (0.5)</b>	<b>0.6 (1.2)</b>	<b>0.4 (0.5)</b>
<b>GFZ - AIUB</b>	<b>0.3 (0.5)</b>	<b>0.7 (1.4)</b>	<b>0.8 (0.9)</b>
<b>AIUB - DLR</b>	<b>0.3 (0.4)</b>	<b>0.4 (0.8)</b>	<b>0.8 (0.8)</b>


Mean (mm)	radial	along-track	cross-track
<b>GFZ - DLR</b>	<b>-0.1</b>	<b>-0.8</b>	<b>-0.1</b>
<b>GFZ - AIUB</b>	<b>-0.2</b>	<b>-1.2</b>	<b>0</b>
<b>AIUB - DLR</b>	<b>0.2</b>	<b>0.3</b>	<b>0.8</b>

Statistics for one month (Median in mm)

# ***From orbits to the gravity field***

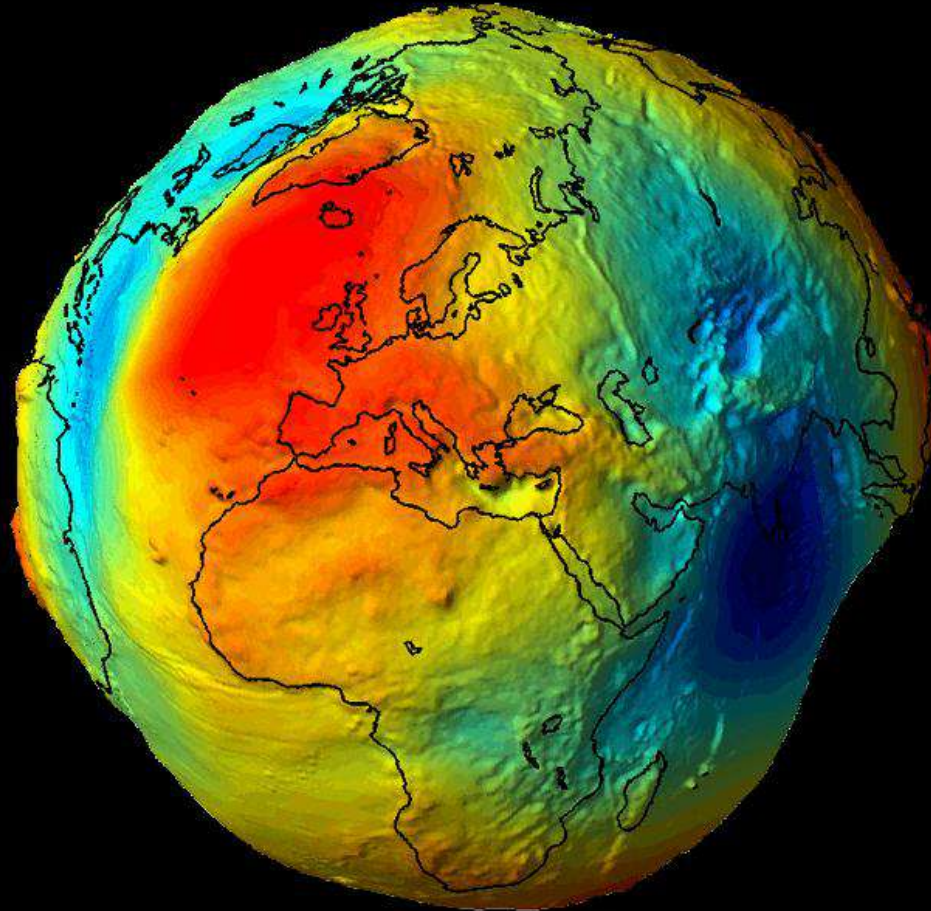

# From orbits to the gravity field

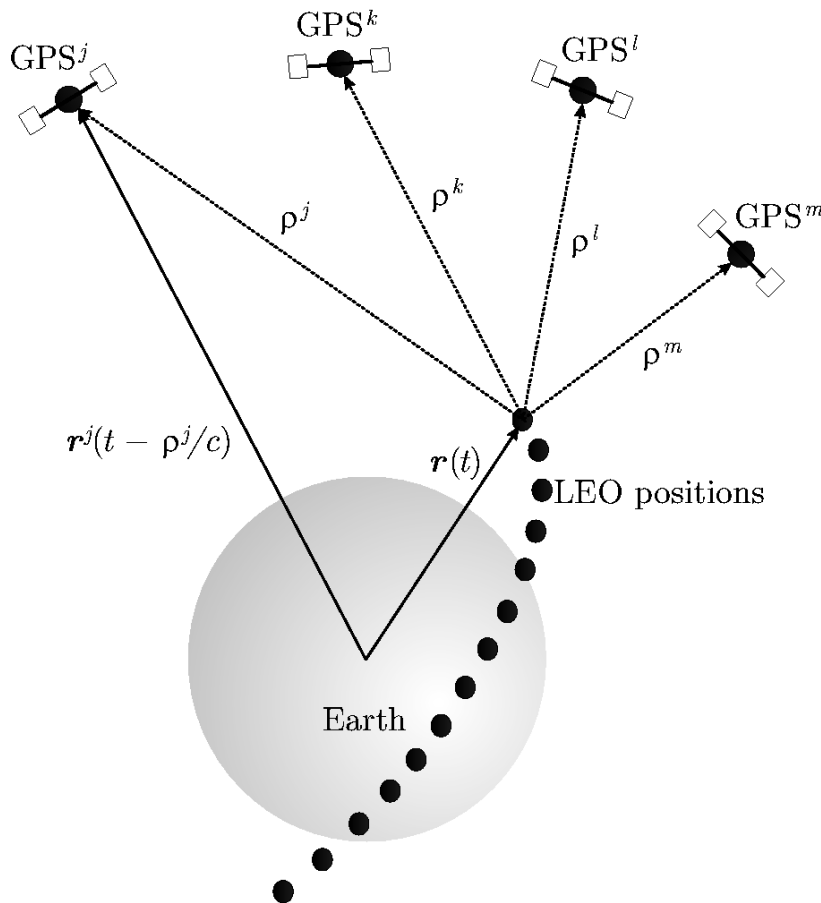

- Kinematic positions contain independent information about the long-wavelength part of the Earth's gravity field
- **1-sec kinematic positions** serve as pseudo-observations together with **covariance information** to set-up an orbit determination problem, which also includes gravity field parameters
- Non-gravitational forces are absorbed by empirical parameters in the course of the generalized orbit determination problem, accelerometer data are **not** used
- Gravity field coefficients are either solved for up to d/o **120** or d/o **160** in the following slides **without** applying any regularization

# From orbits to the gravity field

**Kinematic Orbit Positions**  
Pseudo-Observations with  
Covariance Information

**Accelerometer Data**  
(optional)


## Set-up of an Orbit Determination Problem by Least-Squares

- computation of the observation equations for each daily arc by numerical integration  
(global parameters: SH coefficients; arc-specific parameters, e.g., initial conditions and accelerations)
- construction of the normal equations for each daily arc

## Manipulation of Normal Equation Systems



- manipulation and subsequent pre-elimination of arc-specific parameters  
(e.g., constraining or downsampling of accelerations)
- accumulation of daily normal equations into monthly and annual systems
- regularization of SH coefficients  
(not used)
- inversion of the resulting normal equation systems

# Experience from GRACE

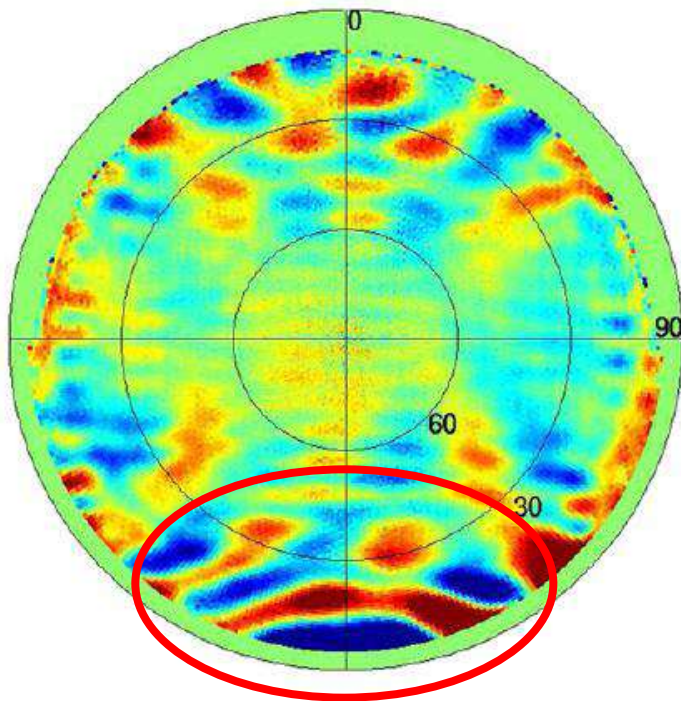


GRACE A

(occultation antenna switched on)

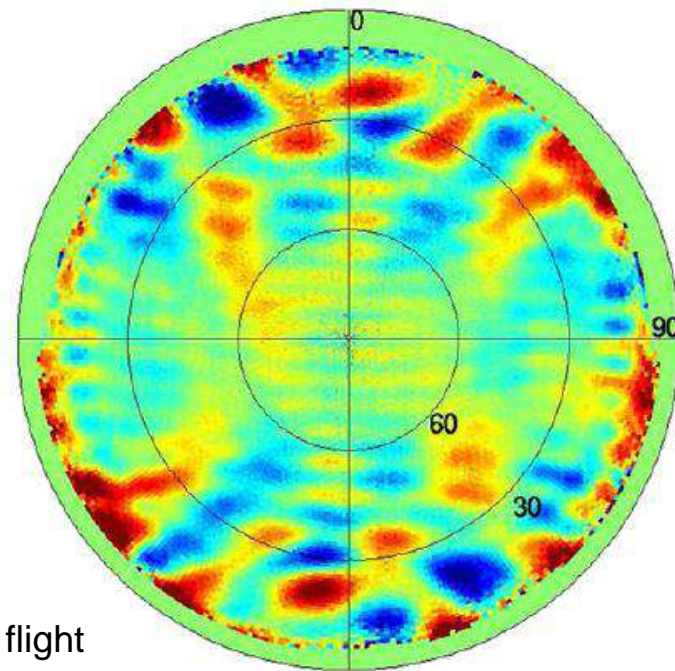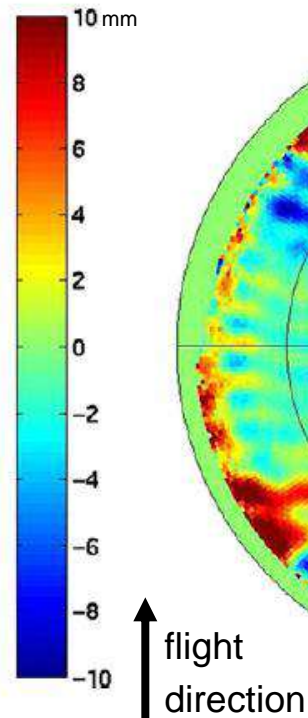

GRACE B



# Impact on the gravity field

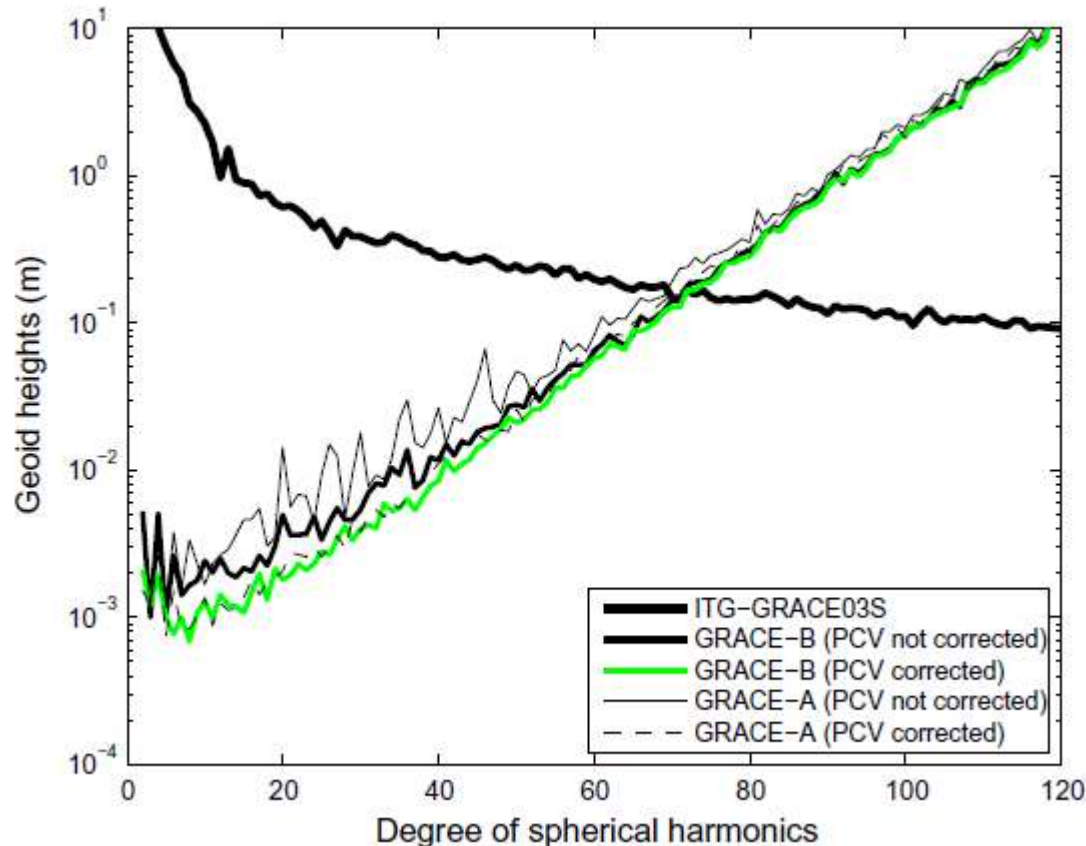

- Very similar results for GRACE A and for GRACE B when taking PCV corrections for kinematic POD into account
- More pronounced degradation for GRACE A when ignoring PCV corrections for kinematic POD (occultation antenna on)
- Impact visible up to relatively high degree and orders


**PCV modeling** is very important for GPS-based gravity field recovery

# What's about GOCE?

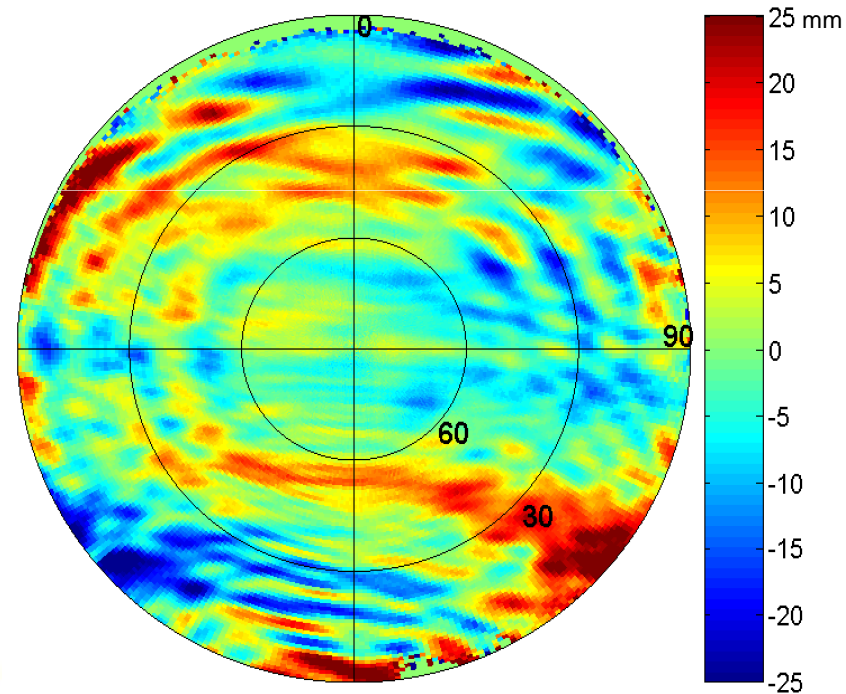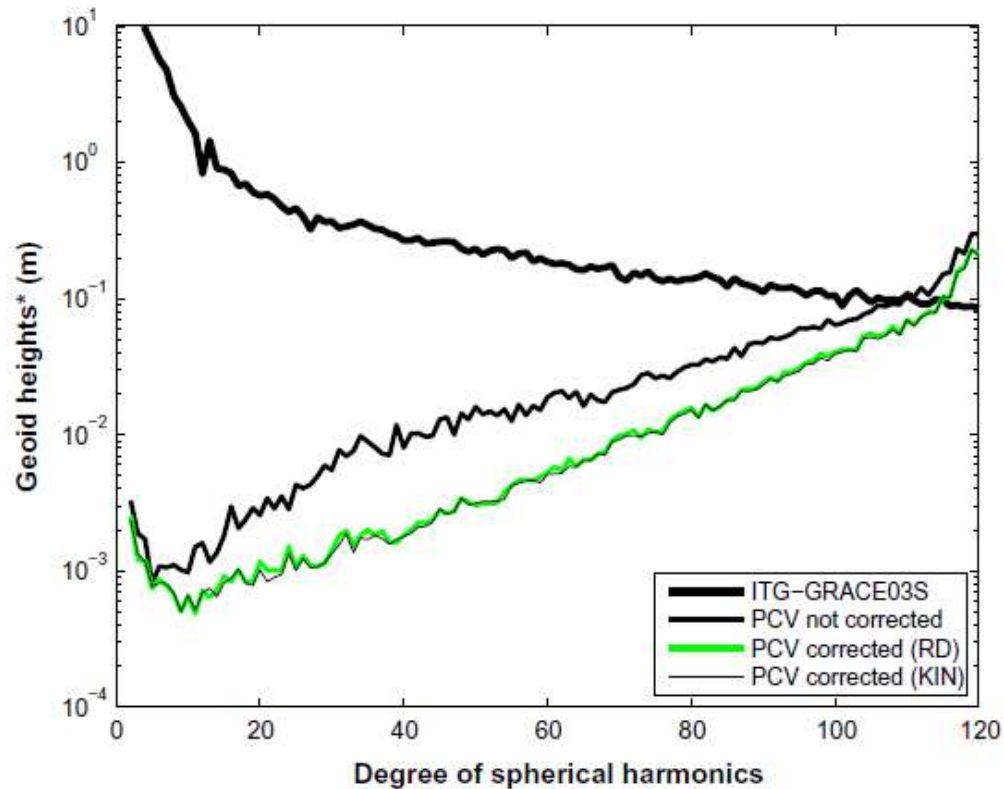


**PCV modeling** is even more important than for GRACE due to the more complicated patterns caused by the GOCE **helix antenna**

# Impact of polar gap

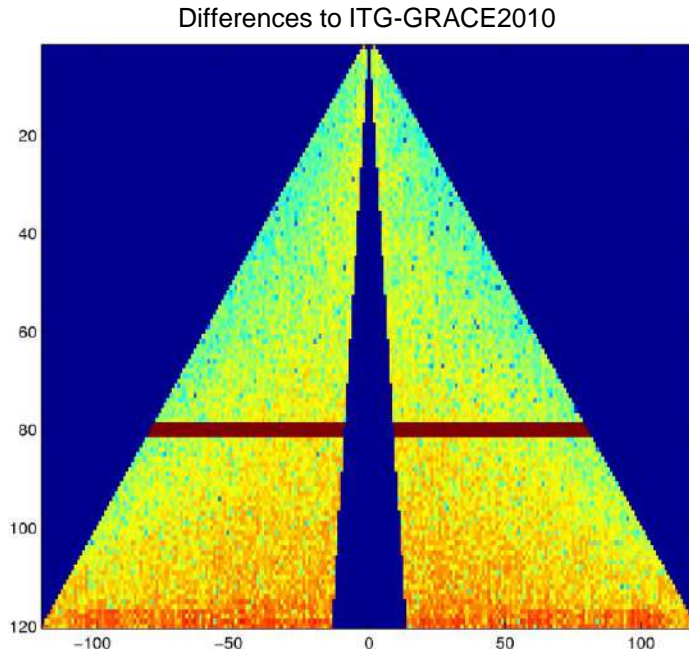

$$\delta d_i \doteq \sqrt{\sum_{m=0}^i (\Delta \bar{C}_{i,m}^2 + \Delta \bar{S}_{i,m}^2)}$$


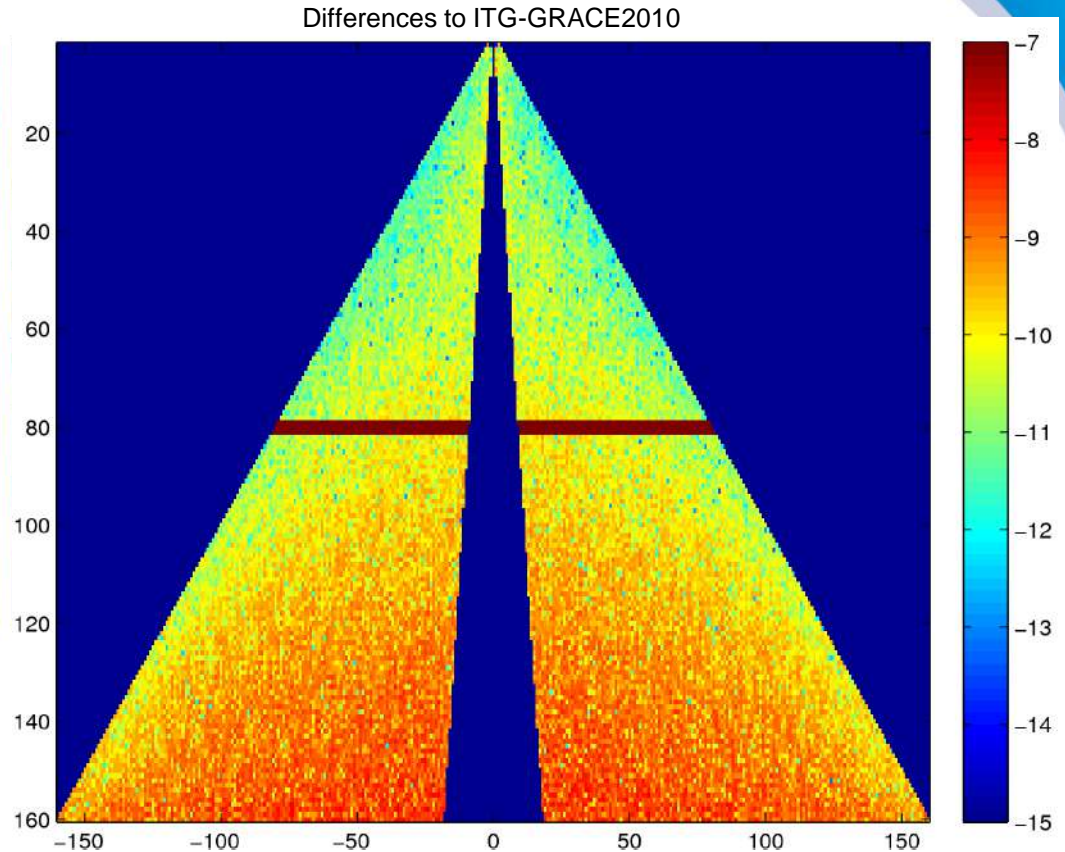


- $\delta d_i$  is dominated by zonal and near-zonal terms, degradation depends on max. d/o
- => exclusion according to the rule of thumb by van Gelderen & Koop

# Solution characteristics



Differences to ITG-GRACE2010

unfiltered, d/o 100

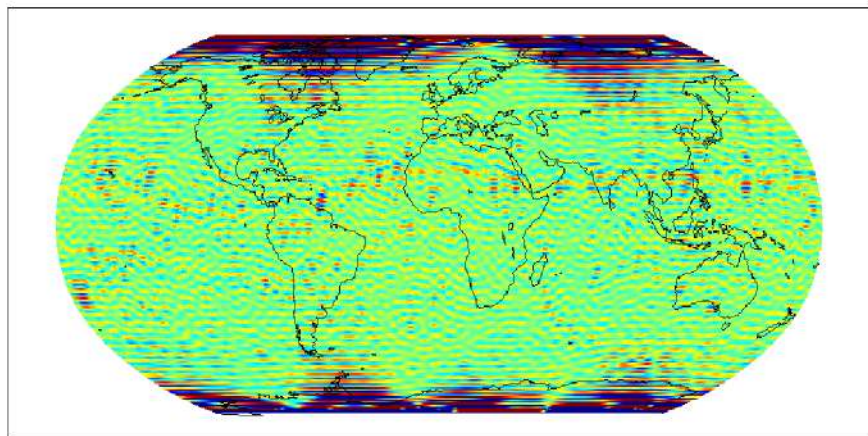

increased noise over polar regions

300 km Gauss-filtered

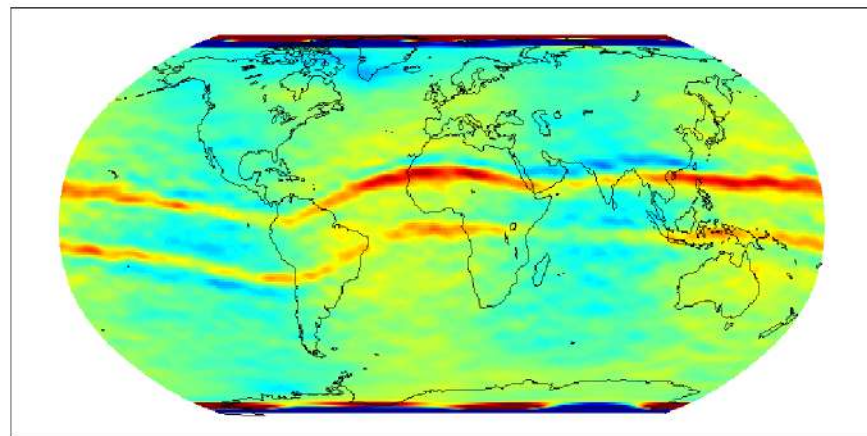


magnetic equator visible

**2009:**  
**RMS (unfiltered):** 113.3 cm  
**RMS (filtered):** 4.9 cm

**2009-10:**  
76.1 cm  
3.1 cm


**2009-11:**  
38.9 cm  
2.0 cm

# Combination with CHAMP

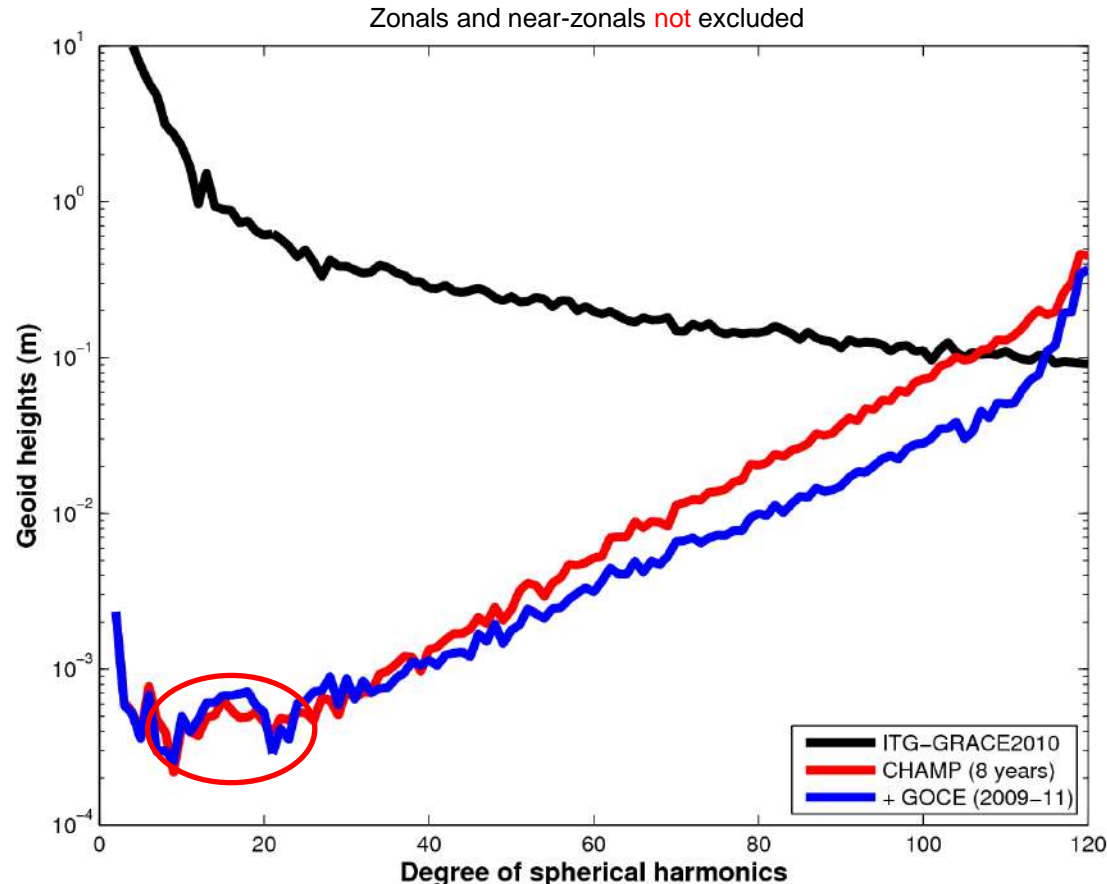

- Down-weighting of the GOCE normal equations is required due to an only marginal contribution of the 1-sec data wrt 5-sec sampled data
- **No degradation** due to the polar gap in the combined solution
- Small degradation when including the most recent GOCE data

# Contribution to gradiometer solution

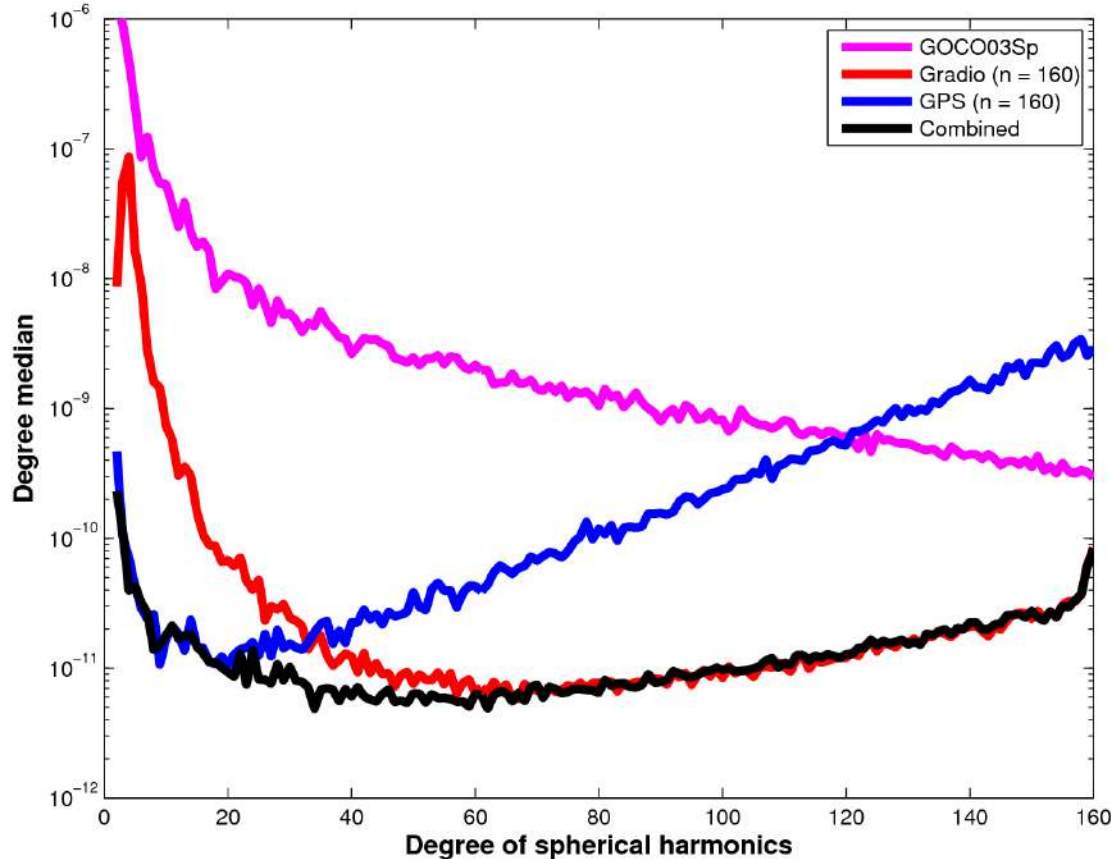

- 8 months of GPS and gradiometer data used
- GPS dominates the combination up to about degree **20** and contributes up to about degree **70**
- No omission artifacts in the combined solution when using GPS beyond degree 120. **No need** to artificially down-weight the GPS contribution



**Thank you for your attention**

# Literature

Beutler, G., A. Jäggi, L. Mervart, U. Meyer (2010): The celestial mechanics approach: theoretical foundations. *Journal of Geodesy*, 84(10), 605-624, doi: 10.1007/s00190-010-0401-7

Bock, H., A. Jäggi, D. Švehla, G. Beutler, U. Hugentobler, P. Visser (2007): Precise orbit determination for the GOCE satellite using GPS. *Advances in Space Research*, 39(10), 1638-1647, doi: 10.1016/j.asr.2007.02.053

Bock, H., A. Jäggi, U. Meyer, P. Visser, J. van den IJssel, T. van Helleputte, M. Heinze, U. Hugentobler (2011): GPS-derived orbits for the GOCE satellite. *Journal of Geodesy*, 85(11), 807-818, doi: 10.1007/s00190-011-0484-9

Bock, H., A. Jäggi, U. Meyer, R. Dach, G. Beutler (2011): Impact of GPS antenna phase center variations on precise orbits of the GOCE satellite. *Advances in Space Research*, 47(11), 1885-1893, doi: 10.1016/j.asr.2011.01.017.

Jäggi, A., U. Hugentobler, G. Beutler (2006): Pseudo-stochastic orbit modeling techniques for low-Earth satellites. *Journal of Geodesy*, 80(1), 47-60, doi: 10.1007/s00190-006-0029-9

# Literature

Jäggi, A. (2007): Pseudo-Stochastic Orbit Modeling of Low Earth Satellites Using the Global Positioning System. *Geodätisch-geophysikalische Arbeiten in der Schweiz*, 73, Schweizerische Geodätische Kommission, available at <http://www.sgc.ethz.ch/sgc-volumes/sgk-73.pdf>

Jäggi, A., R. Dach, O. Montenbruck, U. Hugentobler, H. Bock, G. Beutler (2009): Phase center modeling for LEO GPS receiver antennas and its impact on precise orbit determination. *Journal of Geodesy*, 83(12), 1145-1162, doi: 10.1007/s00190-009-0333-2

Jäggi, A., H. Bock, L. Prange, U. Meyer, G. Beutler (2011): GPS-only gravity field recovery with GOCE, CHAMP, and GRACE. *Advances in Space Research*, 47(6), 1020-1028, doi: 10.1016/j.asr.2010.11.008

Jäggi, A., O. Montenbruck, Y. Moon, M. Wermuth, R. König, G. Michalak, H. Bock, D. Bodenmann (2012): Inter-agency comparison of TanDEM-X baseline solutions. *Advances in Space Research*, 50(2), 260-271, doi: 10.1016/j.asr.2012.03.027.

Montenbruck O., R. Neubert (2011): Range Correction for the CryoSat and GOCE Laser Retroreflector Arrays. *DLR-GSOC TN 11-01*, Deutsches Zentrum für Luft- und Raumfahrt, Oberpfaffenhofen, Germany.

# Literature

Montenbruck, O., M. Wermuth, R. Kahle (2011): GPS Based Relative Navigation for the TanDEM-X Mission - First Flight Results. *Navigation - Journal of the Institute of Navigation*, 58(4), 293-304

Floberghagen, R., M. Fehringer, D. Lamarre, D. Muzi, B. Frommknecht, C. Steiger, J. Piñeiro, A. da Costa (2011): Mission design, operation and exploitation of the gravity field and steady-state ocean circulation explorer mission. *Journal of Geodesy*, 85(11), 749-758, doi: 10.1007/s00190-011-0498-3

Švehla, D., M. Rothacher (2004): Kinematic Precise Orbit Determination for Gravity Field Determination, in *A Window on the Future of Geodesy*, edited by F. Sanso, pp. 181-188, Springer, doi: 10.1007/b139065

Visser, P., J. van den IJssel, T. van Helleputte, H. Bock, A. Jäggi, G. Beutler, D. Švehla, U. Hugentobler, M. Heinze (2009): Orbit determination for the GOCE satellite, *Advances in Space Research*, 43(5), 760-768, doi: 10.1016/j.asr.2008.09.016